

Carrier® Programmed Motor I.D.

The X13® Motor will have (1) Label

Carrier Numbering Scheme


- Begins with **HD**
- Contains (9) digits containing
- Typically located in the lower left corner of nameplate

Carrier Part Number

Genteq® model number
(5SME39xxxxxx)

- Not a VALID part number for programming the RESCUE® Select

**DO NOT USE genteq®
MODEL NUMBER**

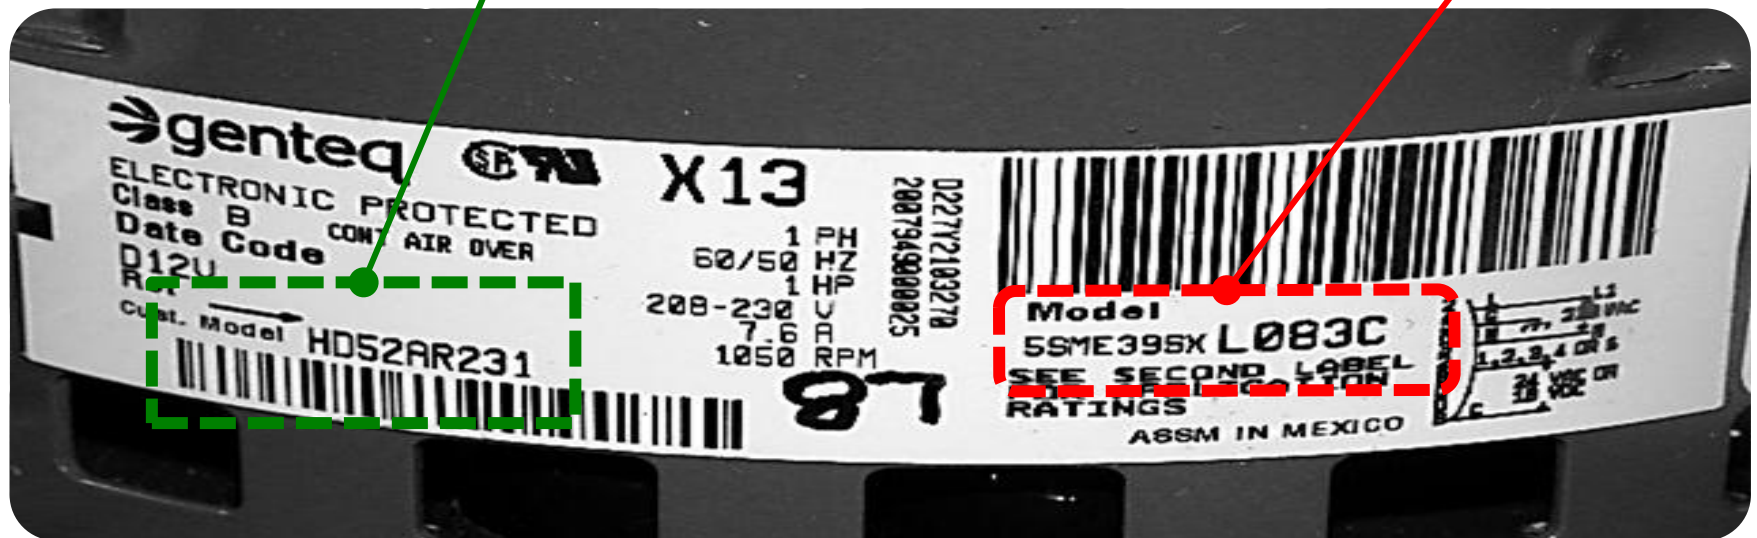

Rheem/Ruud® Units Programmed Motor I.D.

The X13® Motor will have (2) Labels

Nameplate: Contains two part numbers that are **NOT** used for the RESCUE® Select

Cust. model: 51-102280-00:

- The **00** indicates unprogrammed I.D.
- Model number: 5SME39SXL028A



DO NOT USE NAMEPLATE NUMBERS

Rheem Part Number Hierarchy

Cust. Model =	<u>51-102280-00</u>
Model number	5SME39SXL028A

Programmed I.D.	51-102280- 05
-----------------	----------------------

**If revision search is unsuccessful
try previous revision**

PROTECH™

Date: 06/19/2012



51-102280-05

USE SECONDARY LABEL NUMBER

Nordyne® Units Programmed Motor I.D.



The X13® Motor will have (2) Labels

- **Nameplate:** Genteq® model number (5SME39xxxxxx)
 - **Not a VALID** part number for the RESCUE® Select

Secondary Label: Contains the **Valid** part number for programming RESCUE® Select motors.

DO NOT Use Genteq Model Number

USE SECONDARY LABEL NUMBER

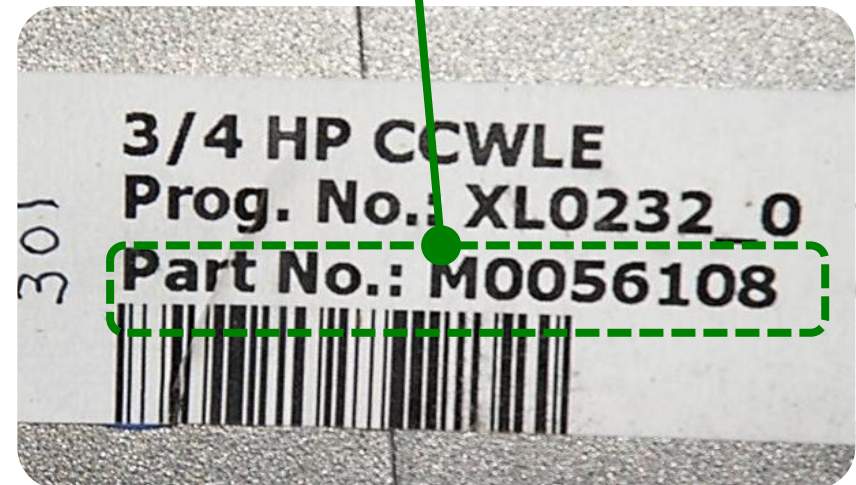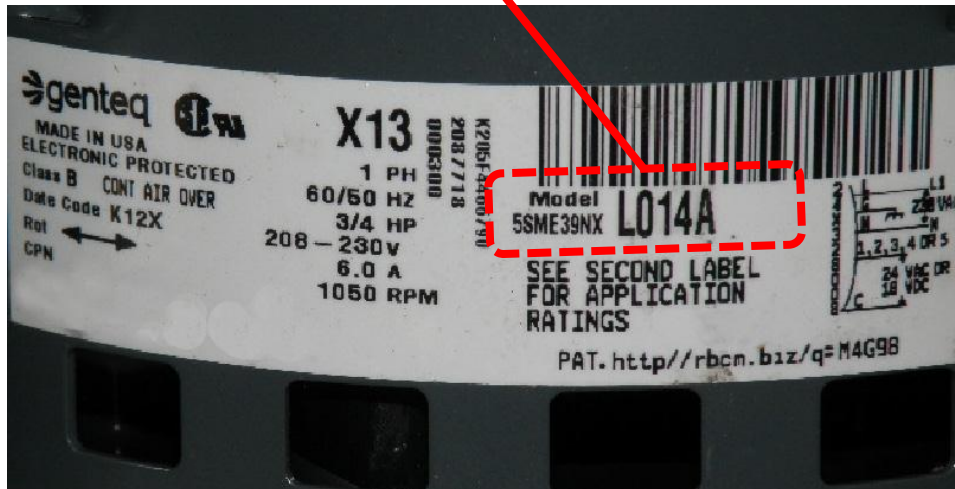

Goodman[®] Programmed Motor I.D

The X13[®] Motor will have (2) Labels


- Nameplate: Genteq[®] model number (5SME39xxxxxx)
 - **Not a VALID** part number for programming the RESCUE[®] select

DO NOT USE NAMEPLATE NUMBER



- Secondary Label: Contains the **Valid** part number for programming RESCUE[®] Select motors.
 - Both “Motor P/N” and “Replacement Kit” will be available in database

USE SECONDARY LABEL NUMBER

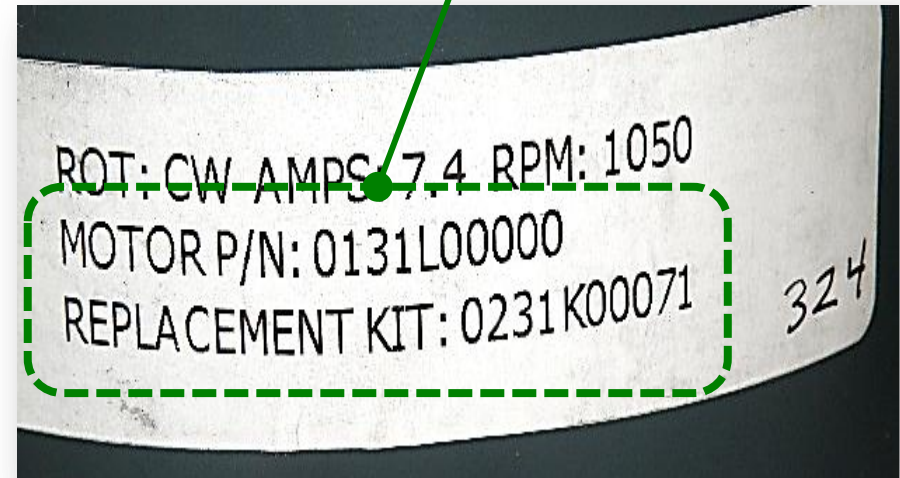

Goodman[®] Programmed Motor I.D

Broad-Ocean Motors will have (2) Labels

- Nameplate: Broad Ocean model number ZWK702D055110
- **Not VALID** part numbers for programming the RESCUE[®] Select

DO NOT USE NAMEPLATE NUMBERS

- Nameplate: Part # starting with 0131Mxxxxx, 0231Kxxxxx
- **Is the VALID** part number for programming the RESCUE[®] Select

Use in “()”, or that starts with 0131M, or 0231K



Coleman/York® Programmed Motor I.D

The X13® Motor will have (2) Labels

- Nameplate: genteq® model number (5SME39xxxxxx)
 - Not a VALID** part number for programming the RESCUE® select

DO NOT USE NAMEPLATE NUMBER

Secondary Label: Contains the **Valid** part number for programming RESCUE® Select motors.

USE SECONDARY LABEL NUMBER



1000 CEM Single-stage Furnace

Programmed P/N S1-02436037000

1/2 HP X-13 Motor


85fd3596-a396-4b94-ac86-4a9bd05fb55a

Trane® Units Programmed Motor I.D.

The X13® Motor will have (2) Labels


- Nameplate: Genteq® model number (5SME39xxxxxx)
 - Not a VALID Motor I.D. Number for programming the RESCUE Select

DO NOT USE genteq® NUMBERS

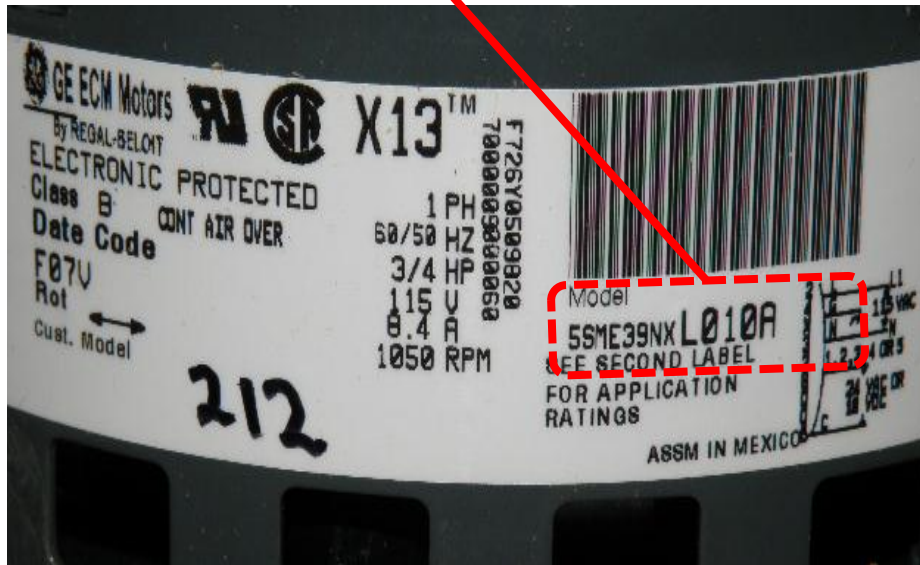

Secondary Label:
Contains the **Valid** part numbers to use for the RESCUE® Select motor

USE SECONDARY LABEL NUMBERS

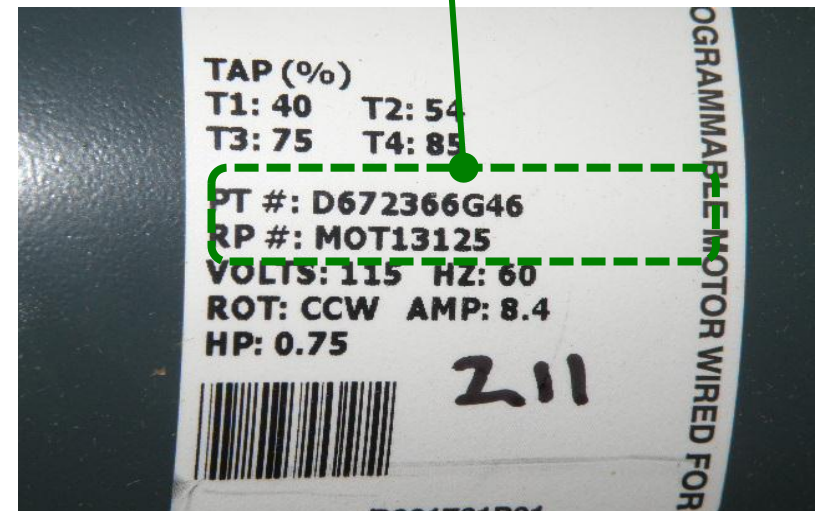

ICP Programmed Motor I.D.

The X13[®] Motor will have (1) Label

ICP Numbering Scheme

- Contains (7) digits
- Typically located in the lower left corner of nameplate

genteq[®] model number

(5SME39xxxxxx)

- Not a VALID part number for programming the RESCUE[®] Select

ICP Part Number

DO NOT USE genteq[®] MODEL NUMBER



Lennox® Programmed Motor I.D


The X13® Motor will have (2) Labels

- Nameplate: Genteq® model number (5SME39xxxxxx)
 - Not a VALID** part number for programming the RESCUE® Select

Secondary Label: Contains the **Valid** part numbers for programming RESCUE® Select Motors
Both "Part Number" and "Motor Replacement Cat#" will be available in database

DO NOT USE genteq® NUMBER

USE SECONDARY LABEL NUMBERS

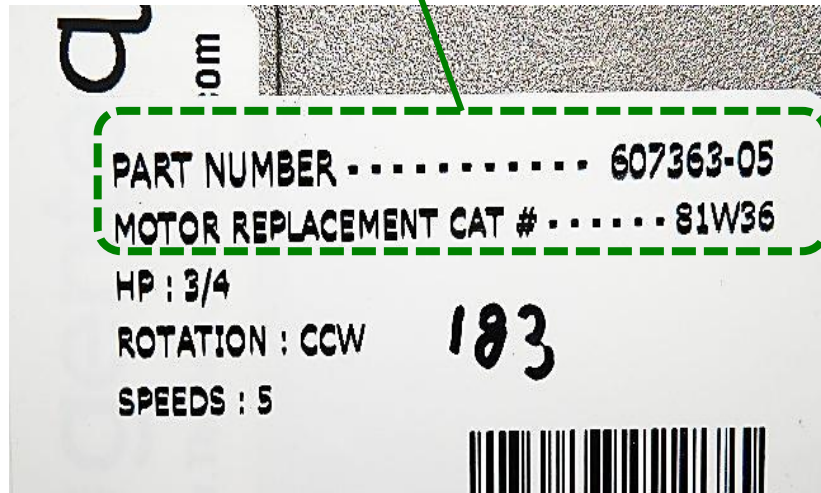


First Company[®] Units Programmed Motor I.D.

The X13[®] Motor will have (2) Labels

- **Nameplate:** Genteq[®] model number (5SME39xxxxxx)
 - Not a VALID part number for the RESCUE[®] Select

DO NOT Use Genteq Model Numbers

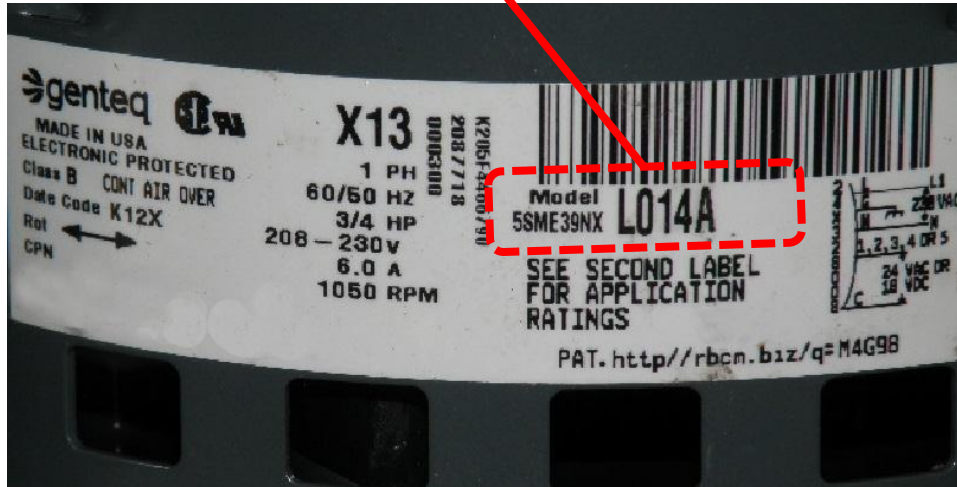

Secondary Label:
Contains the **Valid** part numbers to use for the RESCUE[®] Select motor

USE SECONDARY LABEL NUMBER




Bard[®] Units Programmed Motor I.D.

The X13[®] Motor will have (2) Labels

- **Nameplate:** Genteq[®] model number (5SME39xxxxxx)
 - Not a VALID part number for the RESCUE[®] Select

DO NOT Use Genteq Model Numbers

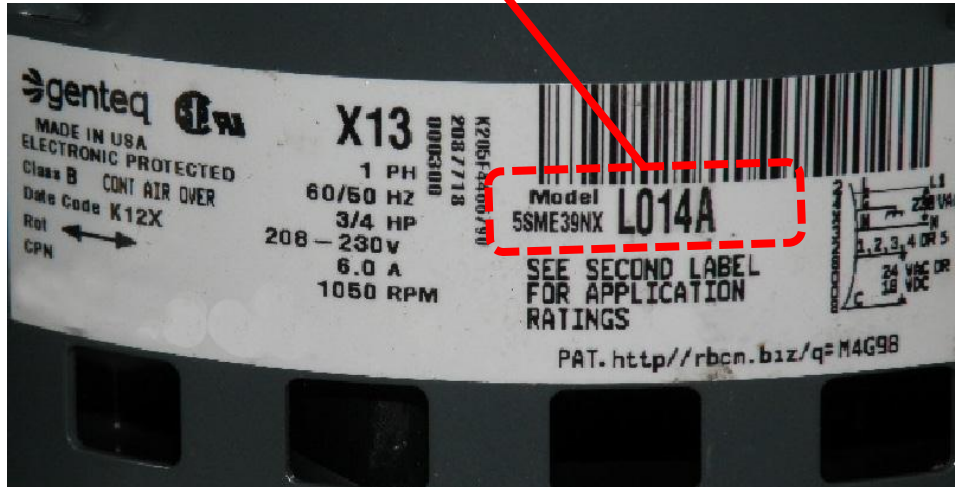

Secondary Label:

Contains the **Valid** part numbers to use for the RESCUE[®] Select motor

USE SECONDARY LABEL NUMBER

