



Features:

- Designed for concealed installation in furred down ceilings
- Requires a Sealed Return Air Space
- Optional Long Life Aluminum or Copper DX Coils for Cooling Only or factory installed Electric Heat (208/ 230 VAC)
- Unique polymer blower scroll separates for easy blower wheel and motor removal
- Corrosion resistant polycarbonate drain pan
- DX Coil, Electric Heat, motor, blower wheel, and polycarbonate drain pan are all serviceable from the bottom
- Rugged, durable, and easy to service

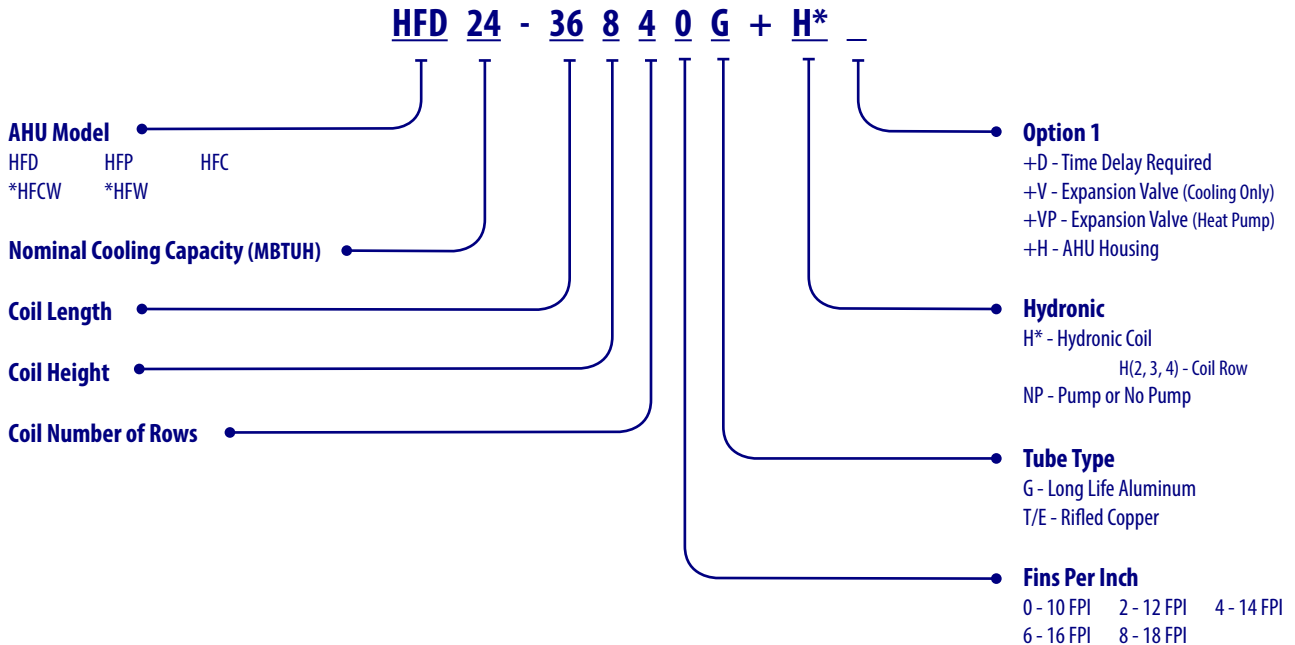

• *HF*W - Hydronic Air Handler

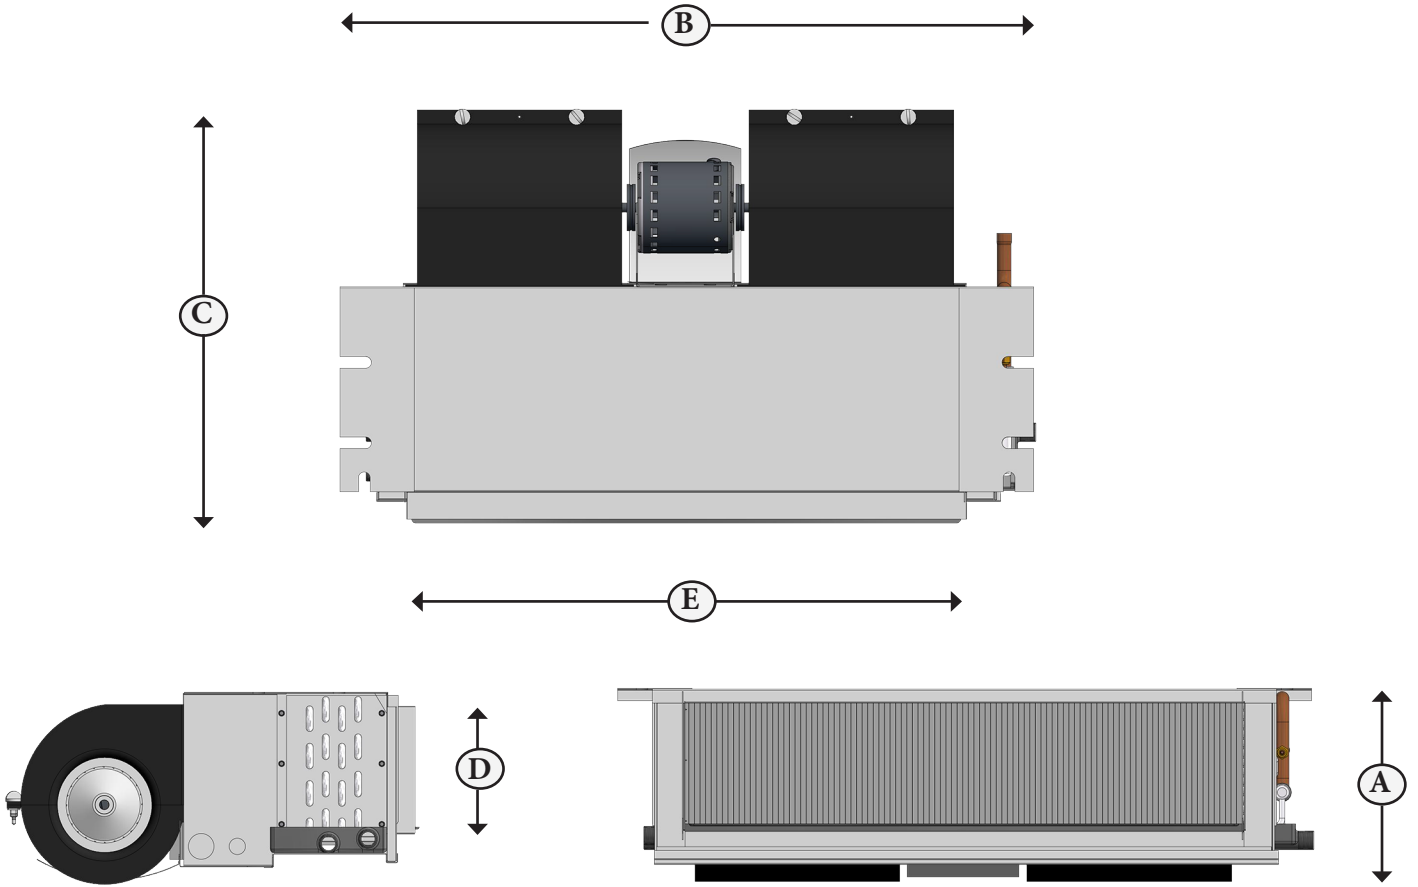

Cabinet Dimensions					
MODEL	Cabinet Height - A	Cabinet Width - B	Cabinet Depth - C	Plenum Height - D	Plenum Width - E
HF**	10.00"	37.25"	20.50"	7.00"	30.00"
	10.00"	43.25"	20.50"	7.00"	36.00"
	10.00"	49.25"	20.50"	7.00"	42.00"