


Mounted "AH\*" Air Handlers  
Patent Product


**Features:**

- Designed for installation in a furred down or dropped ceiling area
- Cooling Only, Cooling and Electric Heating, or Heat Pump with Electric back up
- Optional factory installed Electric Heat of either 3, 5, 6, 8, or 10 kW
- Cooling Capacities 1, 1.5, 2.0, 2.5, or 3.0 Nominal Tons
- Orifice Refrigerant metering is standard with Thermal Expansion Valves optional

- Standard Internal Filter Rack
- Factory installed Time Delay Relay
- Pre-punched side mounting tabs for easier installations
- Long Life Aluminum or Rifled Copper tube
- Aluminum fins and end plates
- Powder coated, hinged access panels must be ordered separately
- Fully insulated embossed, galvanized steel cabinets

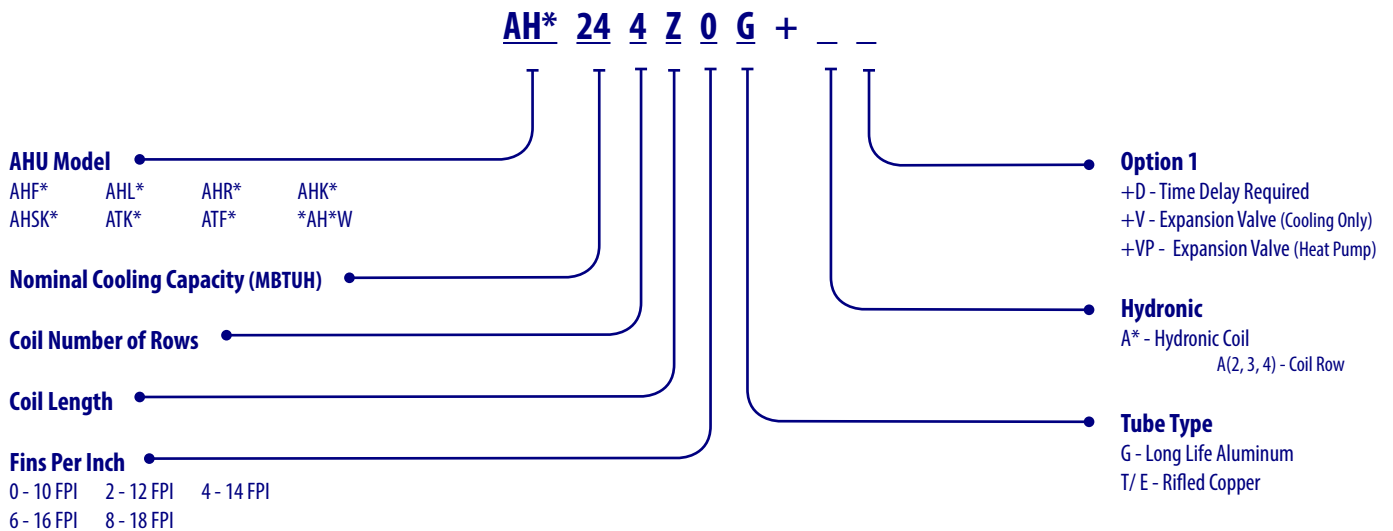

- \*AH\*W - Hydronic Air Handler
- \* Specify on R or L (Right or Left)
- \*AHR\* / AHL\* Side Discharge Units

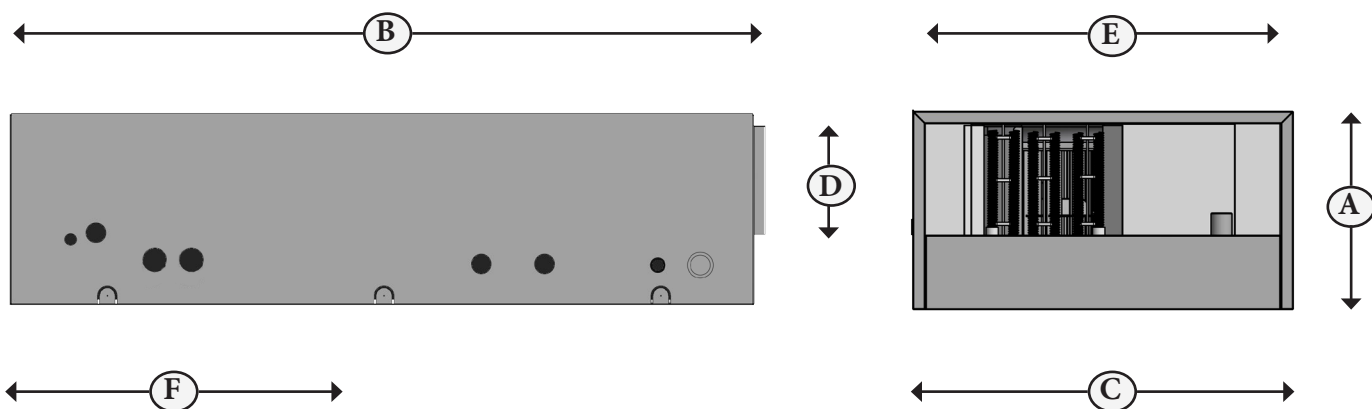

Cabinet Dimensions										
Model	Nominal Tonnage	Cabinet Height - A	Cabinet Length - B	Cabinet Width - C	Plenum Height - D	Plenum Width - E	Optional Return Opening - F	Access Grille Width	Access Grille Length	Filter Size
AHF*	1, 1 1/2, 2, & 2 1/2	12.00"	47.00"	22.50"	8.00"	21.50"	21.00" x 7.50"	27.25"	51.25"	20.00" x 20.00"
AHK*	1, 1 1/2, 2, & 2 1/2	12.00"	51.00"	22.50"	8.00"	21.50"	21.00" x 7.50"	27.25"	55.25"	20.00" x 20.00"
AHSK*	1 - 3 Tons	12.00"	57.00"	22.50"	8.00"	21.50"	21.00" x 7.50"	27.25"	59.25"	20.00" x 20.00"

Cabinet Dimensions										
Model	Nominal Tonnage	Cabinet Height - A	Cabinet Length - B	Cabinet Width - C	Plenum Height - D	Plenum Width - E	Optional Return Opening - F	Access Grille Width	Access Grille Length	Filter Size
ATF*	1, 1 1/2, 2, & 2 1/2	16.00"	47.00"	22.50"	12.00"	20.50"	20.00" x 11.50"	27.25"	51.25"	20.00" x 20.00"
ATK*	3 Tons	16.00"	51.00"	22.50"	12.00"	20.50"	20.00" x 11.50"	27.25"	55.25"	20.00" x 20.00"