





# Delta BreezSlim Ventilation Super Low Profile Fan Specifications

SLM100  
(100 CFM)

## Dimensions

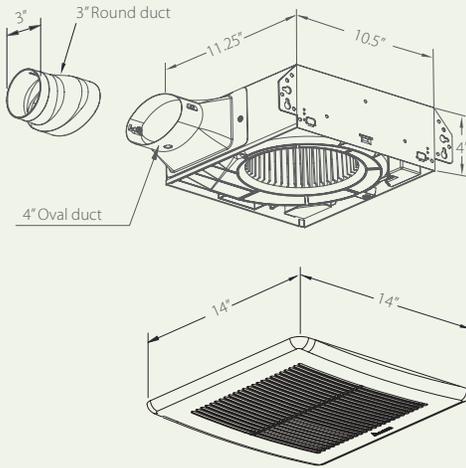

## Fan Curve

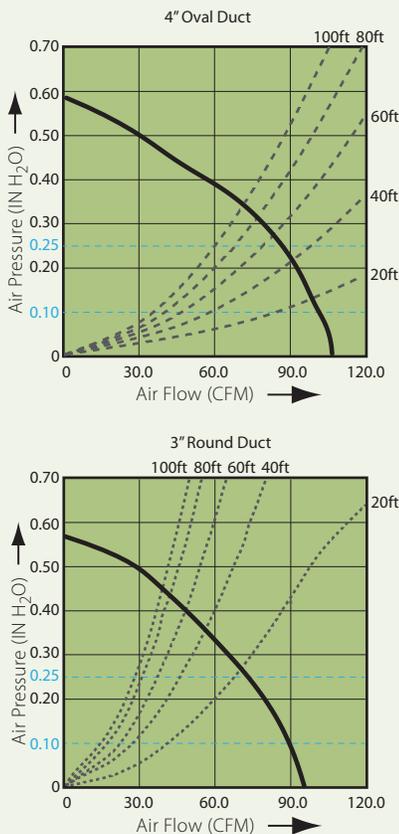

## Description

Low noise ceiling or wall mount ventilating fan, rated for continuous running. ENERGY STAR® qualified. HVI, UL and cUL certified to comply with ASHRAE 62.2 local and whole building continuous and intermittent operation. Meets CA Title 24 and CALGreen requirements.

## Motor/Blower

- Power rating of 120 volts/60Hz.
- DC brushless motor engineered to run continuously.
- Motor equipped with thermal cutoff fuse.
- Removable with permanently lubricated motor.

## Housing

- Galvanized steel body.
- Detachable 4" oval metal duct adapter.
- Built-in backdraft damper.
- Includes 4" oval duct to 3" round duct reducer.
- Easy installation.

## Grille

- Attractive design using ABS material.
- Attaches directly to housing with torsion springs.

## LED Indicator

- Turn the power switch on/off to operate on/off. LED indicator will be green when power is on.

## Warranty

- 3-year limited warranty.

## Features

- Green LED indicator.
- For ceiling or wall mount, airflow of 100 CFM ( $\pm 10\%$ ) and 1.0 Sones at 0.1 static pressure.
- Power consumption approximately 14.5 Watts with an efficiency rating approximately 6.8 CFM/Watt.
- UL and cUL listed for tub/shower enclosure when used with GFCI-protected branch circuit wiring.

## DC Motor Technology

- Built-in soft start function to increase bearings' life.
- Automatically powers OFF when the impeller is locked abnormally.

## Specifications

SLM100	4" Oval Duct		3" Round Duct	
Static Pressure (Inches w.g.)	0.1	0.25	0.1	0.25
Air Flow (CFM)	100	87	90	73
Sones	1.0	1.5	1.5	2.0
Power Consumption (Watts)	14.5	17.7	17.4	16.9
Energy Efficiency (CFM/Watt)	6.8	4.9	5.1	4.3
Current (Amps)	0.3 Max			
Power Rating (V/Hz)	120/60			