

V220 Flexible Aluminum Pipe

Builder's Best, Inc.
 201 Broiles Drive • Jacksonville, TX 75766
 1-8-U VENT SAFE (1-888-368-7233) or 903-586-8283
 FAX 1-800-259-VENT (1-800-259-8368) or 903-586-9370
 Internet: www.buildersbest.com





Description


- *Non-insulated general purpose venting duct for low and medium operating pressures.*
- *Non-combustible flexible metal duct made of corrugated aluminum with water-tight continuous lockseams.*
- *Class 0*

Product Specs

- 8', 10', and 20' lengths
- 3", 4", 5", 6", 7" and 8" diameter
- 3" and 4" diameter available in 25' length
- Compressed to 24"
- Plain ends
- Thinner wall than V230
- Available with and without clamps

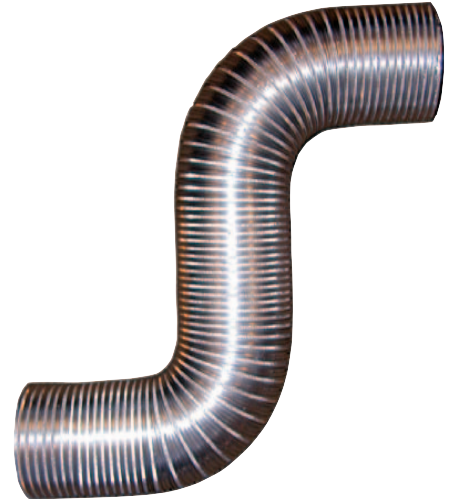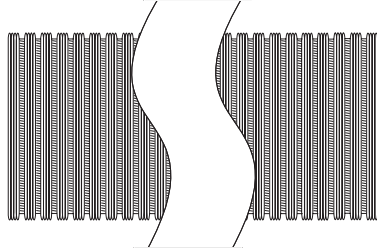

Airflow

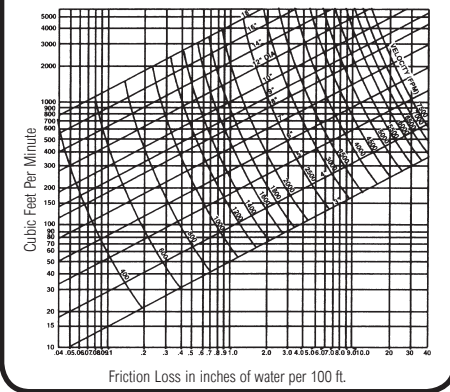

Performance Data

Pressure Rating:
 Positive: 6" WC max
 Negative: 6" WC max

Maximum velocity: 5,000 FPM

Operating Temp. Range: -100°F to + 430°F

Flame Spread 0
 Smoke Developed 0

INSTALLATION: Air duct connections and joints shall be made per installation instructions outlined by Builder's Best and as required by the UL 181 listing procedure. (Installation instructions are included inside each carton.)

Labels

N/A

Warranty

WARRANTY EXCLUSION AND DISCLAIMER Seller specifically excludes, and hereby disclaims any express representation or express warranty of any kind with respect to the goods ordered hereunder. All implied warranties, including without limitation merchantability or fitness for a particular purpose or arising from a course of dealing or usage or trade shall expire and cease 45 days after date of delivery. Seller shall not be liable to buyer or any third party for any special, secondary, incidental, or consequential damages however arising. Nothing in this provision shall invalidate or restrict any right or remedy otherwise available under state or federal law. Materials and specifications subject to change without notice