

5

4

3

2

1





C

C

B

B

A

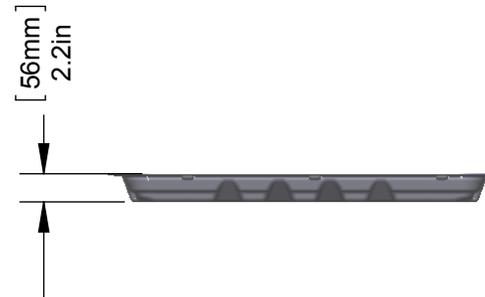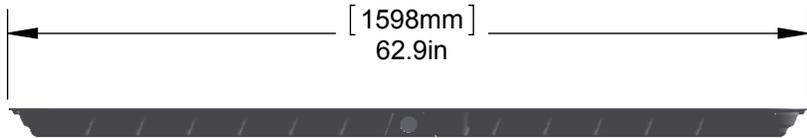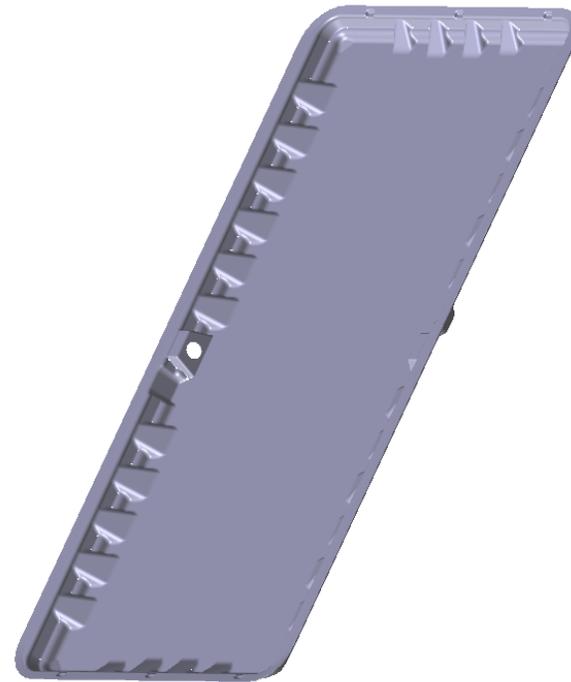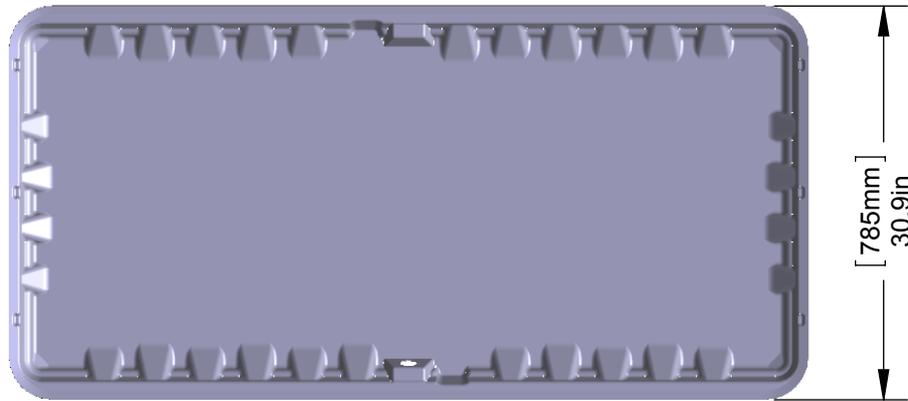

NOTES:

- Extreme Temperature Durability (-40°F to 260°F).
- High Tensile Strength.
- Crack/Split/Leak/Rust Resistant.
- Self Extinguishing.
- DexElar Material is UL-94 5VA
- Made With Pride in the USA

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
 TOLERANCES:
 FRACTIONAL ±.032
 ANGULAR: MACH ± .5° BEND ±2°
 TWO PLACE DECIMAL ± .010
 THREE PLACE DECIMAL ± .005

INTERPRET GEOMETRIC
 TOLERANCING PER: ANSI Y14.5, 2009

| ENGINEERING | NAME | DATE |
|-----------------|------|----------|
| DRAWN BY ENG. | JK | 05/01/12 |
| CHECKED BY ENG. | ES | 05/01/12 |
| ENG APPR. | CC | 05/01/12 |
| MFG APPR. | CC | 05/01/12 |

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF RESOURCE CONSERVATION TECHNOLOGIES, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF RESOURCE CONSERVATION TECHNOLOGIES IS PROHIBITED.

RESOURCE
 CONSERVATION TECHNOLOGIES
 64208 PARKLAND DRIVE SUITE 102
 SARASOTA, FL 34243 888-708-6622

TITLE:
AG-T 30x62 SPECIFICATION SHEET

| | | |
|------------------|-------------|--------------|
| SIZE A | SCALE: 1:15 | SHEET 1 OF 1 |
|------------------|-------------|--------------|

5

4

3

2

1