


Fiber Free

# AC/Accoflex<sup>®</sup>

Tube Insulation

Fiber-free, flexible, elastomeric pipe insulation for reliable protection against condensation, mold, energy loss and ultraviolet radiation in residential and commercial applications

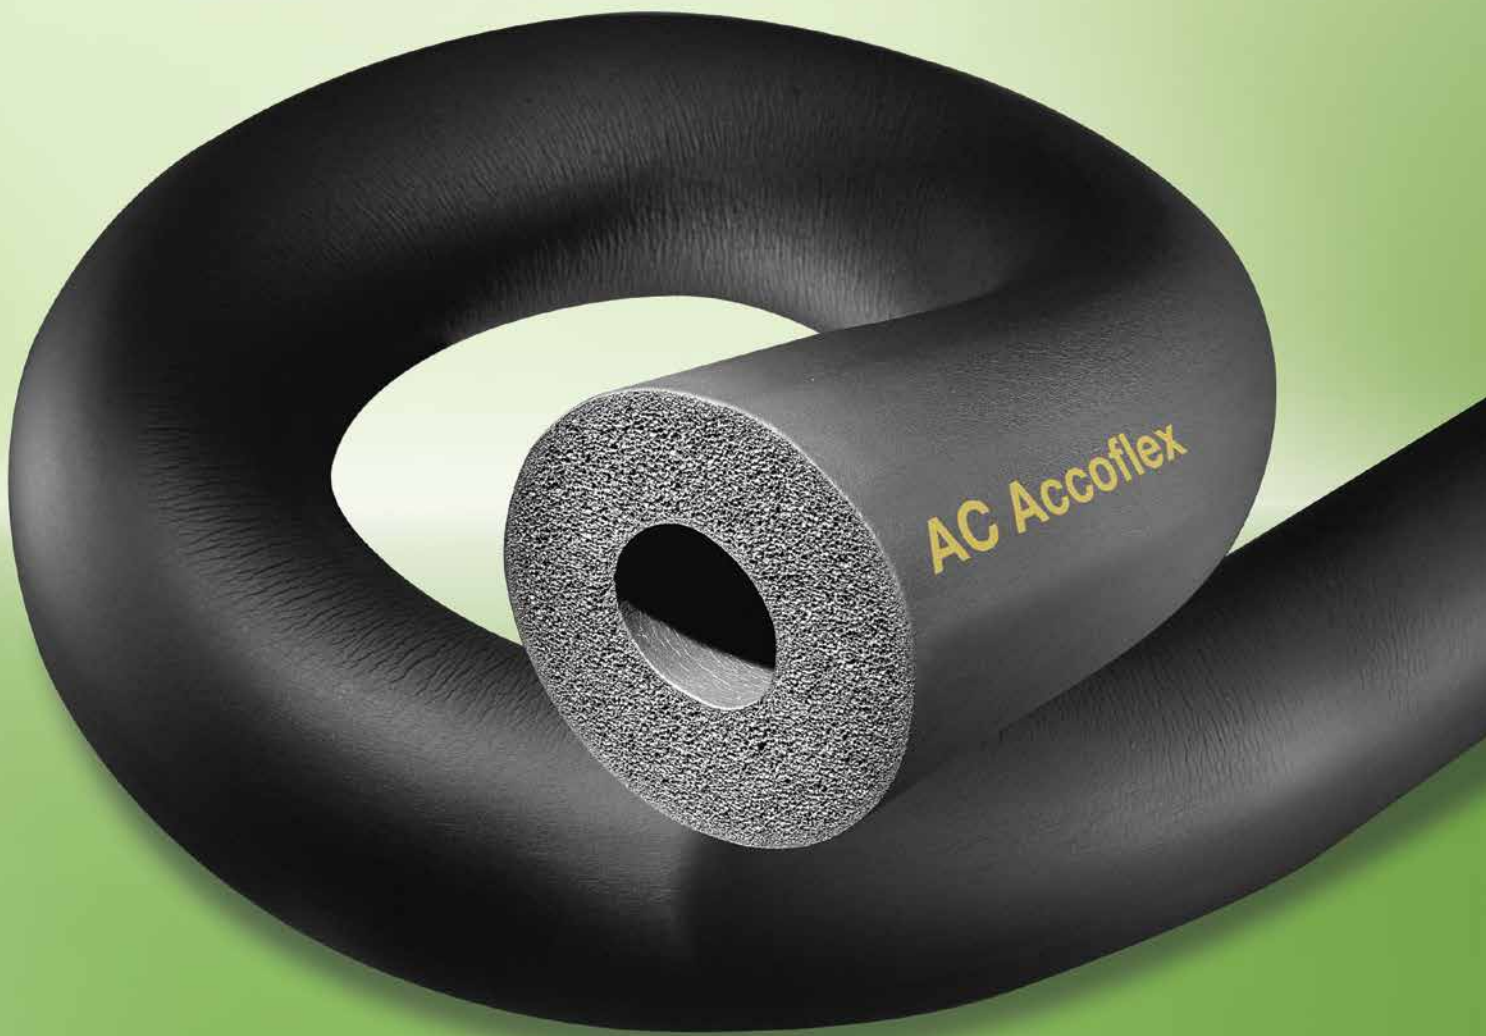

- Closed-cell structure provides excellent condensation and energy loss control
- Effectively retards degradation due to ultraviolet radiation
- Flexible material with dusted, relaxed ID's for easy installation. Superior toughness to withstand on-site handling
- Built-in vapor retardant barrier eliminates need for additional vapor retarder

 **armacell<sup>®</sup>**



## Technical Data: AC Accoflex® Pipe Insulation

### Description:

Black flexible elastomeric thermal pipe insulation

### Specifications Compliance:

ASTM C 534, Type I - Tubular Grade 1

### Approvals, Certifications, Compliances:

- Manufactured without CFCs, HFCs, HCFCs, PBDEs, or Formaldehyde.
- All Armacell facilities in North America are ISO 9001:2008 certified.

### Typical Properties

Specifications:	Values	Test Method:
<b>Thermal Conductivity:</b> Btu • in./h • ft <sup>2</sup> • °F (W/mK) 75°F Mean Temperature [24°C] 90°F Mean Temperature [32°C]	0.27 (0.039) 0.276 (0.040)	ASTM C 177 or C 518
<b>Water Vapor Permeability:</b> Perm-in. [Kg/(s • m • Pa)]	0.08 (1.16 x 10 <sup>-13</sup> )	ASTM E 96, Procedure A
<b>Flame Spread and Smoke Developed Index:</b>	25/50 rated	ASTM E 84
<b>Water Absorption,</b> % by Volume:	0.2%	ASTM C 209
<b>Mold Growth:</b> <b>Fungi Resistance :</b> <b>Bacterial Resistance:</b>	Passed	UL181 ASTM G21/C1338 ASTM G22
<b>Upper Use Limit:</b> <sup>1</sup>	220°F (105°C)	ASTM C534
<b>Lower Use Limit:</b> <sup>2</sup>	-297°F (-183°C) <sup>3</sup>	ASTM C534
<b>Ozone Resistance:</b>	GOOD	—

### Sizes:

<b>Wall Thickness (nominal)</b>	3/8" 1/2", 3/4" and 1" (10, 13, 19 and 25 mm)
<b>Inside Diameter, Tubular</b>	3/8", ID to 4-1/8" ID (10 mm ID to 105 mm ID)
<b>Length of Sections, Tubular</b>	6' (1.83 m)

### Outdoor Use

No painting is necessary for performance of the product. However, all elastomeric-based cellular insulation will show surface defects after prolonged exposure to UV radiation. Painting will minimize these defects if installed outdoors.

<sup>1</sup> AC Accoflex can withstand temperatures as high as 250°F for 96 hour time periods when tested according to ASTM C411 - Standard Test Method for Hot-Surface Performance of High-Temperature Thermal Insulation.

<sup>2</sup> At temperatures below -20°F (-29°C), elastomeric insulation starts to become less flexible. However, this characteristic does not affect thermal efficiency and resistance to water vapor permeability of Accoflex insulation.

<sup>3</sup> For applications of -40°F to -297°F (-40°C to -183°C), contact Armacell.

### ARMACELL LLC

TEL: 800.866.5638

FAX: 919.304.3847

info.us@armacell.com

www.armacell.us

7600 Oakwood Street Extension, Mebane, NC 27302



Armacell provides this information as a technical service. To the extent the information is derived from sources other than Armacell, Armacell is substantially, if not wholly, relying upon the other source(s) to provide accurate information. Information provided as a result of Armacell's own technical analysis and testing is accurate to the extent of our knowledge and ability, as of date of printing, using effective standardized methods and procedures. Each user of these products, or information, should perform their own tests to determine the safety, fitness and suitability of the products, or combination of products, for any foreseeable purposes, applications and uses by the user and by any third party to which the user may convey the products. Since Armacell cannot control the end use of this product, Armacell does not guarantee that the user will obtain the same results as published in this document. The data and information are provided as a technical service and are subject to change without notice.