



EFFICIENT 13 SEER HEAT PUMP ENVIRONMENTALLY SOUND R-410A REFRIGERANT

1½ THRU 5 TONS SPLIT SYSTEM

208 / 230 Volt, 1-phase, 60 Hz

REFRIGERATION CIRCUIT

- Copeland® compressors on all models
- Suction line accumulator factory installed
- Bi-flow filter-drier supplied with every unit for field installation
- Integrated solid state control with Time-Temperature Defrost
- High and Low pressure switches
- Copper tube / aluminum fin coil
- 4 and 5 ton models have 2-row coil for reduced height

EASY TO INSTALL AND SERVICE

- Easy Access service valves on all models
- External high and low refrigerant service ports
- Only two screws to access control panel
- Factory charged with R-410A refrigerant

BUILT TO LAST

- Baked-on powder coat finish over galvanized steel
- Post-painted (black) coil fins
- Coated, weather-resistant cabinet screws
- Coated inlet grille with 2" spacing standard, alternate models available with ¾" grille spacing for extra protection
- 5 year compressor, coil, and parts limited warranties





ARI Standard 210/240
Unitary Heat Pumps
Rated in accordance with ARI Standard 240.
Certification applies only when used with proper
components as listed with ARI.



Model Number	Size (tons)	Nominal Btu/hr	Min. Circuit Ampacity	Max. Fuse or Breaker	Operating Dimensions height x width x depth (in)	Ship / Operating Weight (lbs)
N4H318AKC	1½	18,000	12.0	20	35¼ x 25¾ x 26⅝	174 / 148
18GKC	same model with 3/8" spacing inlet grille					
N4H324AKA	2	24,000	16.8	25	28⅝ x 31⅜ x 32⅝	182 / 155
24GKA	same model with 3/8" spacing inlet grille					
N4H330AKB	2½	30,000	20.8	30	39⅞ x 31⅜ x 32⅝	215 / 180
30GKB	same model with 3/8" spacing inlet grille					
N4H336AKB	3	36,000	21.7	35	28⅝ x 35 x 36⅝	207 / 172
36GKB	same model with 3/8" spacing inlet grille					
N4H342AKA	3½	42,000	26.0	40	39⅞ x 35 x 36⅝	266 / 234
42GKA	same model with 3/8" spacing inlet grille					
N4H348AKB	4	48,000	28.4	50	28⅝ x 35 x 36⅝	273 / 240
48GKB	same model with 3/8" spacing inlet grille					
N4H360AKB	5	60,000	34.1	50	28⅝ x 35 x 36⅝	282 / 250
60GKB	same model with 3/8" spacing inlet grille					

Specifications subject to change without notice.

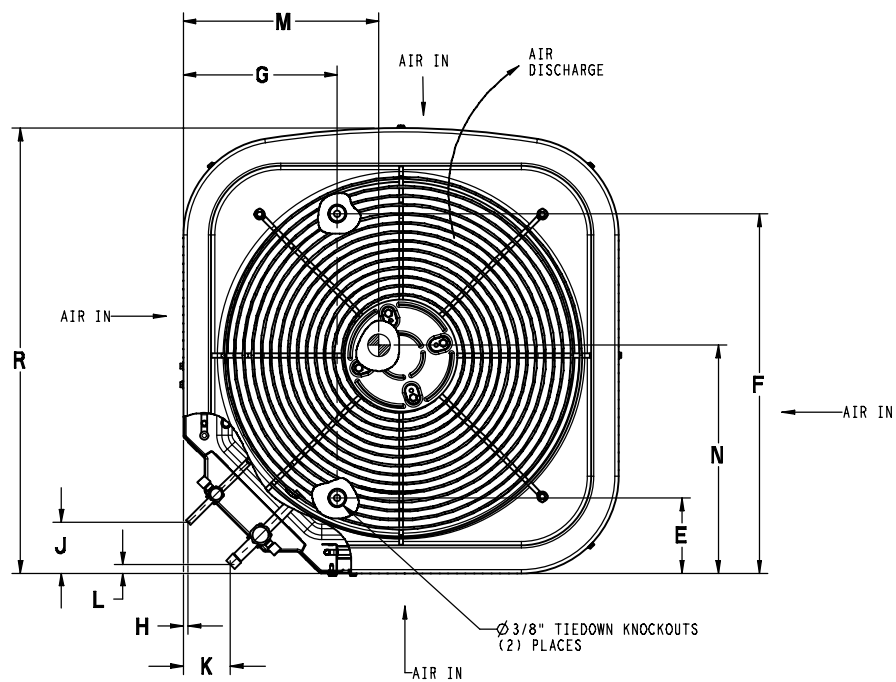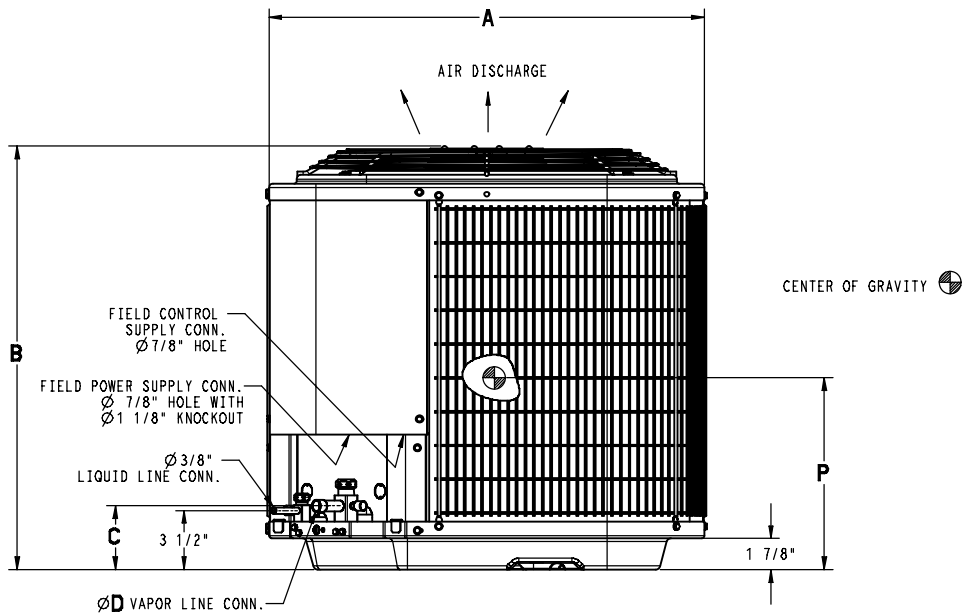

All Dimensions Inches

Model (* = A or G)	All Dimensions Inches															Minimum Mounting Pad Size	Crated Dimensions B(h) x A(w) x R(d)
	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R		
N4H318*KC	25 ³ / ₄	35 ¹ / ₄	3 ³ / ₄	5 ⁵ / ₈	4 ⁷ / ₁₆	24 ¹ / ₄	9 ⁵ / ₈	1 ¹ / ₈	3 ¹³ / ₁₆	2 ¹³ / ₁₆	1/2	13 ¹ / ₂	14 ¹ / ₂	14	26 ⁵ / ₁₆	26 x 26 ¹ / ₂	39 ³ / ₈ x 30 ¹ / ₁₆ x 26 ⁷ / ₈
N4H324*KA	31 ¹³ / ₁₆	28 ¹⁵ / ₁₆	3 ³ / ₄	5 ⁵ / ₈	6 ⁹ / ₁₆	24 ¹¹ / ₁₆	9 ⁵ / ₈	1 ¹ / ₈	3 ¹³ / ₁₆	2 ¹³ / ₁₆	1/2	15 ⁵ / ₈	16 ³ / ₄	14 ¹ / ₂	32 ⁵ / ₁₆	31 ¹ / ₂ x 32 ¹ / ₂	32 ⁹ / ₁₆ x 35 ¹ / ₂ x 32 ³ / ₈
N4H330*KB	31 ¹³ / ₁₆	39 ¹ / ₈	3 ³ / ₄	3/4	6 ⁹ / ₁₆	24 ¹ / ₄	9 ⁵ / ₈	1 ¹ / ₈	3 ¹³ / ₁₆	2 ¹³ / ₁₆	1/2	16 ¹ / ₂	15 ¹ / ₂	17	32 ⁵ / ₁₆	31 ¹ / ₂ x 32 ¹ / ₂	42 ³ / ₄ x 35 ¹ / ₂ x 32 ³ / ₈
N4H336*KB	35	28 ¹⁵ / ₁₆	3 ³ / ₄	3/4	6 ⁹ / ₁₆	28 ⁷ / ₁₆	9 ⁵ / ₈	1 ¹ / ₈	3 ¹³ / ₁₆	2 ¹³ / ₁₆	1/2	15 ¹ / ₂	15 ³ / ₄	12 ¹ / ₂	36 ⁹ / ₁₆	35 x 36 ¹ / ₂	32 ⁹ / ₁₆ x 39 ⁵ / ₁₆ x 36 ¹ / ₈
N4H342*KA	35	39 ¹ / ₈	3 ⁷ / ₈	7/8	6 ⁹ / ₁₆	28 ⁷ / ₁₆	9 ⁵ / ₈	1 ¹ / ₈	3 ¹³ / ₁₆	2 ¹⁵ / ₁₆	5/8	17 ¹ / ₄	19 ¹ / ₈	15 ³ / ₄	36 ⁹ / ₁₆	35 x 36 ¹ / ₂	42 ³ / ₄ x 39 ⁵ / ₁₆ x 36 ¹ / ₈
N4H348*KB	35	28 ¹⁵ / ₁₆	3 ⁷ / ₈	7/8	6 ⁹ / ₁₆	28 ⁷ / ₁₆	9 ⁵ / ₈	1 ¹ / ₈	3 ¹³ / ₁₆	2 ¹⁵ / ₁₆	5/8	17	16	12	36 ⁹ / ₁₆	35 x 36 ¹ / ₂	32 ⁹ / ₁₆ x 39 ⁵ / ₁₆ x 36 ¹ / ₈
N4H360*KB	35	28 ¹⁵ / ₁₆	3 ⁷ / ₈	7/8	6 ⁹ / ₁₆	28 ⁷ / ₁₆	9 ⁵ / ₈	1 ¹ / ₈	3 ¹³ / ₁₆	2 ¹⁵ / ₁₆	5/8	17	16	12	36 ⁹ / ₁₆	35 x 36 ¹ / ₂	32 ⁹ / ₁₆ x 39 ⁵ / ₁₆ x 36 ¹ / ₈

PHYSICAL DATA							
Model Size	18	24	30	36	42	48	60
Nominal Cooling Capacity (BTU/hr)	18,000	24,000	30,000	36,000	42,000	48,000	60,000
Nominal SEER	13.0	13.0	13.0	13.0	13.0	13.0	13.0
Sound Rating (dBA)	74	75	76	72	77	77	77
PSC Fan Motor HP	1/10	1/10	1/10	1/8	1/5	1/4	1/4
Fan RPM (single speed)	1100	1100	1100	1100	800	800	800
Fan CFM	2196	2614	2614	3472	3810	4046	4046
Coil Face Area (ft ²)	14.77	15.09	21.56	17.60	25.15	17.60	17.60
Coil Rows – fins per inch	1 – 25	1 – 20	1 – 20	1 – 20	1 – 20	2 – 20	2 – 20
Low Pressure Switch Open Pressure Close Pressure	23 ± 5 PSIG 55 ± 5 PSIG	23 ± 5 PSIG 55 ± 5 PSIG	23 ± 5 PSIG 55 ± 5 PSIG	23 ± 5 PSIG 55 ± 5 PSIG	23 ± 5 PSIG 55 ± 5 PSIG	23 ± 5 PSIG 55 ± 5 PSIG	23 ± 5 PSIG 55 ± 5 PSIG
High Pressure Switch Open Pressure Close Pressure	670 ± 10 PSIG 470 ± 25 PSIG	670 ± 10 PSIG 470 ± 25 PSIG	670 ± 10 PSIG 470 ± 25 PSIG	670 ± 10 PSIG 470 ± 25 PSIG	670 ± 10 PSIG 470 ± 25 PSIG	670 ± 10 PSIG 470 ± 25 PSIG	670 ± 10 PSIG 470 ± 25 PSIG
Liquid Line Connection Size (in.)	3/8	3/8	3/8	3/8	3/8	3/8	3/8
Vapor Line Connection Size (in.)	5/8	5/8	3/4	3/4	7/8	7/8	7/8
Recommended Line Set Liquid Tube Diameter (in.)	3/8	3/8	3/8	3/8	3/8	3/8	3/8
Recommended Line Set Vapor Tube Diameter (in.)	5/8 *	5/8 *	3/4 *	3/4 *	7/8 *	7/8 *	1 1/8 *
* Recommended Vapor Tube Line size is for standard installations. These recommendations may not apply to “Long Line” installations. When the total equivalent line length exceeds 80 feet or there is more than 20 feet vertical separation between indoor and outdoor units, consult the Long Line Application Guideline document before purchasing/installing line sets.							
Factory Charge R-410A (lbs.)	5.1	5.9	8.2	6.8	8.4	11.4	11.3
Required Subcooling (° F)	10	12	12	9	11	11	12
Weight, shipping (lbs.)	174	182	215	207	266	273	282
Weight, operating (lbs.)	148	155	180	172	234	240	250

ELECTRICAL DATA (208/230–1–60, voltage range 197V – 253V)							
Model Size	18	24	30	36	42	48	60
Minimum Circuit Ampacity – MCA (amps)	12.0	16.8	20.8	21.7	26.0	28.4	34.1
Maximum OverCurrent Protective device – MOCP (amps)	20	25	30	35	40	50	50
Compressor RLA (Rated Load Amps)	9.0	12.8	16.0	16.7	19.9	21.8	26.3
LRA (Locked Rotor Amps)	48	58.3	77	79	109	117	134
Fan Motor FLA (Full Load Amps)	0.8	0.8	0.8	0.9	1.2	1.2	1.2

R-410A COOLING CAPACITY LOSS FOR VARIOUS LINE LENGTHS & TUBE DIAMETERS

Model Size	Liquid Line (in.)	Acceptable Vapor Line Sizes (in.)	Cooling Capacity Loss (%) at Total Equivalent Line Length (ft.) Refer to Long Line Application Guideline to calculate equivalent length										
			Standard Application			Long Line Application (Requires Accessories)							
			25'	50'	80'	81'	100'	125'	150'	175'	200'	225'	250'
18	3/8	1/2	1	2	3	3	4	6	7	8	9	10	12
		5/8	0	0	1	1	1	1	2	2	3	3	3
24		5/8	0	1	1	1	2	3	3	4	4	5	6
		3/4	0	0	0	0	0	1	1	1	1	1	2
30		5/8	1	2	3	3	3	4	5	6	7	8	9
		3/4	0	0	1	1	1	1	2	2	2	3	3
		7/8	0	0	0	0	0	1	1	1	1	1	1
36		5/8	1	2	4	4	5	6	7	9	10	11	13
		3/4	0	0	1	1	1	2	2	3	3	4	4
		7/8	0	0	0	0	0	1	1	1	1	2	2
42		3/4	0	1	2	2	2	3	4	4	5	6	6
		7/8	0	0	1	1	1	1	2	2	2	3	3
48	3/4	0	1	2	2	3	4	5	5	6	7	8	
	7/8	0	0	1	1	1	2	2	2	3	3	4	
60	3/4	1	2	4	4	5	6	7	9	10	11	12	
	7/8	0	1	2	2	2	3	4	4	5	5	6	
	1 1/8	0	0	0	0	1	1	1	1	1	1	2	

* Applications are considered "Long Line" if the total equivalent tubing length exceeds 80 feet or there is more than 20 foot vertical separation between indoor and outdoor units). These applications require additional accessories and system modifications for reliable system operation.

Applications in shaded area may have height restrictions that limit allowable total equivalent length when outdoor unit is below indoor unit.

ACCESSORY USAGE GUIDELINES

Accessory	REQUIRED FOR APPLICATIONS IN SNOW-BELT REGION	REQUIRED FOR LOW-AMBIENT APPLICATIONS (Below 55° F)	REQUIRED FOR LONG-LINE APPLICATIONS* (Over 80 Ft.)
Crankcase Heater	Standard (if required)	Yes	Yes
Evaporator Freeze Thermostat	No	Yes	No
Accumulator	Standard (factory installed)	Standard (factory installed)	Standard (factory installed)
Hard Start Kit (Capacitor & Relay)	No	Yes	Yes
Low Ambient Kit (Pressure Switch)	No	Yes	No
Support Feet, 4" tall	Yes	Recommended	No
Liquid Line Solenoid Valve	No	No	See Long-Line Application Guideline

* For Line Set lengths between 80 and 200 ft horizontal. or more than 20 ft indoor-outdoor vertical separation, refer to the Long Line Application Guideline document.

ACCESSORIES		
Part Number	Description	Used On Model Size
NASA001CH	Crankcase Heater for Scroll Compressor (208/230 V)	42 (factory installed on 48, 60)
NASA003CH	Crankcase Heater for Scroll Compressor (208/230 V)	18, 24, 30, 36
NASA001SC	Start Component – PTC Device	ALL
NASA001FS	Evaporator Freeze Thermostat	ALL
NASA001LS	Liquid Line Solenoid Valve, HP, R-22 or R-410A	ALL
NASA001TD	Time Delay Relay, Indoor Blower	ALL
NASA001AC	Anti-Cycle Timer (5 minute delay)	ALL
NASA005SC	Hard Start Kit (Capacitor & Relay)	ALL
NASA401LA	Low Ambient Pressure Switch	ALL
NASA001SF	Support Feet, 4" tall	ALL
NASA001SJ	Sound Jacket, Compressor	18, 24, 30, 36, 42, 48
NASA003SJ	Sound Jacket, Compressor	60
AXWR01DFB	Fossil Fuel Kit	ALL
EBAC05TXVX	TXV Kit, R-410A *	18, 24, 30
EBAC06TXVX	TXV Kit, R-410A *	36, 42
EBAC07TXVX	TXV Kit, R-410A *	48, 60

* ONLY converts Fan Coils equipped with factory installed R-22 TXV.

COOLING & HEATING PERFORMANCE FOR COMBINATION RATINGS
Indoor Models

Outdoor Model	Current Indoor Model (‡ tested combo)	Furnace Model or Blower	Factory Installed	Cool (95 ° F)			SEER				Heat (47 ° F)		Heat (17 ° F)		HSPF	
				BTU/hr	S / T	EER	factory	with field TDR	with field R-410A TXV	with field R-410A TXV+TDR	BTU/hr	COP	BTU/hr	COP		
N4H318AKC N4H318GKC	‡FS(M,U)4X18****	†	TDR&TXV	17,200	0.75	10.7	13.00					18,000	3.30	10,800	2.20	7.7
	ED*4X18B**	*8MPV050	TDR&TXV	17,600	0.75	11.50	14.00					17,800	3.46	10,500	2.32	7.7
	ED*4X18B**	MV08B15****	TDR&TXV	17,400	0.75	12.00	14.00					17,400	3.42	10,200	2.32	7.7
	ED*4X24B**	†	TXV	17,500	0.75	10.80		13.00				18,000	3.40	10,900	2.24	7.7
	^ED*4X24B**	*8MPV050	TDR&TXV	18,000	0.75	11.50	14.00					17,900	3.66	10,600	2.38	8.2
	ED*4X24B**	MV08B15****	TDR&TXV	17,800	0.75	12.00	14.00					17,600	3.64	10,300	2.38	8.0
	ED*4X24F**	†	TXV	17,500	0.75	10.80		13.00				18,000	3.40	10,900	2.24	7.7
	^ED*4X24F**	*9MPV050	TDR&TXV	18,000	0.75	11.50	14.00					17,900	3.70	10,700	2.40	8.2
	^ED*4X24F**	*9MPV075	TDR&TXV	18,000	0.75	11.50	14.00					17,900	3.70	10,700	2.40	8.2
	^ED*4X24F**	MV12F19****	TDR&TXV	17,900	0.75	12.00	14.00					17,700	3.66	10,300	2.40	8.2
	EHD4X24A**	†	TXV	17,700	0.75	10.80		13.20				18,000	3.44	10,900	2.26	7.7
	^EHD4X24A**	*8MPV050	TDR&TXV	18,000	0.75	11.50	14.00					17,800	3.66	10,600	2.38	8.2
	^EHD4X24A**	*9MPV050	TDR&TXV	18,000	0.75	11.50	14.00					17,700	3.66	10,700	2.38	8.2
	^EHD4X24A**	*9MPV075	TDR&TXV	18,000	0.75	11.50	14.00					17,700	3.64	10,700	2.38	8.2
	EHD4X24A**	MV08B15****	TDR&TXV	17,800	0.75	12.00	14.00					17,500	3.60	10,300	2.36	8.0
	EHD4X24A**	MV12F19****	TDR&TXV	17,700	0.75	12.00	14.00					17,500	3.56	10,300	2.36	8.0
	^EHD4X24A**	MV20N26****	TDR&TXV	18,000	0.75	12.00	14.00					17,500	3.84	10,700	2.50	8.2
	EMA4X24D**	†	TXV	17,500	0.75	10.80		13.00				18,000	3.46	10,900	2.24	7.7
	FEM4X18****	†	TDR&TXV	17,600	0.75	11.50	14.00					17,700	3.50	10,400	2.32	7.7
	FEM4X24****	†	TDR&TXV	17,800	0.75	12.00	14.00					17,600	3.58	10,400	2.36	8.0
FS(M,U)4X24****	†	TDR&TXV	17,300	0.75	10.60	13.00					18,000	3.32	10,900	2.20	7.7	
^FVM4X24****	†	TDR&TXV	17,800	0.75	12.00	14.00					17,300	3.58	10,200	2.36	8.2	
N4H324AKA N4H324GKA	‡FS(M,U)4X24****	†	TDR&TXV	22,600	0.76	10.8	13.00					24,000	3.54	15,000	2.48	8.2
	ED*4X24B**	†	TXV	22,800	0.76	10.80	13.00					24,400	3.62	15,100	2.50	8.3
	ED*4X24B**	*8MPV050	TDR&TXV	23,000	0.76	11.20	13.50					24,000	3.74	14,800	2.60	8.6
	^ED*4X24B**	MV08B15****	TDR&TXV	23,400	0.76	11.70	14.00					23,800	3.86	14,700	2.68	8.8
	ED*4X24F**	†	TXV	22,800	0.76	10.80	13.00					24,400	3.62	15,000	2.48	8.3
	^ED*4X24F**	*9MPV050	TDR&TXV	23,000	0.76	11.50	14.00					24,000	3.76	14,700	2.60	8.6
	^ED*4X24F**	*9MPV075	TDR&TXV	23,200	0.76	11.50	14.00					24,000	3.80	14,800	2.62	8.7
	^ED*4X24F**	MV12F19****	TDR&TXV	23,400	0.76	11.70	14.00					23,800	3.88	14,500	2.68	8.8
	ED*4X30B**	†	TXV	23,000	0.76	10.80	13.00					23,400	3.56	15,200	2.52	8.3
	^ED*4X30B**	*8MPV050	TDR&TXV	23,400	0.76	11.50	14.00					23,200	3.70	14,800	2.62	8.6
	^ED*4X30B**	MV08B15****	TDR&TXV	23,400	0.76	11.70	14.00					23,000	3.78	14,500	2.68	8.7
	ED*4X30F**	†	TXV	23,000	0.76	10.80	13.00					23,400	3.56	15,200	2.52	8.3
	^ED*4X30F**	*9MPV050	TDR&TXV	23,400	0.76	11.50	14.00					23,000	3.72	14,700	2.64	8.6
	^ED*4X30F**	*9MPV075	TDR&TXV	23,400	0.76	11.50	14.00					23,000	3.74	14,700	2.64	8.6
	^ED*4X30F**	MV12F19****	TDR&TXV	23,800	0.76	12.00	14.00					22,800	3.84	14,600	2.72	8.9
	EHD4X24A**	†	TXV	22,800	0.76	10.80	13.00					24,000	3.68	15,200	2.54	8.5
	EHD4X24A**	*8MPV050	TDR&TXV	23,000	0.76	11.20	13.50					23,800	3.80	15,000	2.62	8.7

^ Indicates ENERGY STAR compliance for combinations with all three: SEER 14.0 or higher and EER 11.5 or higher and HSPF 8.2 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device.

- continued on next page -

COOLING & HEATING PERFORMANCE FOR COMBINATION RATINGS (continued)
Indoor Models

Outdoor Model	Current Indoor Model (‡ tested combo)	Furnace Model or Blower	Factory Installed	Cool (95 ° F)			SEER				Heat (47 ° F)		Heat (17 ° F)		HSPF	
				BTU/hr	S / T	EER	factory	with field TDR	with field R-410A TXV	with field R-410A TXV+TDR	BTU/hr	COP	BTU/hr	COP		
N4H324AKA N4H324GKA (continued)	^EHD4X24A**	*8MPV075	TDR&TXV	23,000	0.76	11.50	14.00					23,800	3.88	15,000	2.66	8.9
	^EHD4X24A**	*8MPV100	TDR&TXV	23,200	0.76	11.50	14.00					23,600	3.92	14,900	2.68	9.0
	^EHD4X24A**	*8MPV125	TDR&TXV	23,200	0.76	11.50	14.00					23,600	3.92	14,900	2.70	9.0
	EHD4X24A**	*9MPV050	TDR&TXV	23,000	0.76	11.20	13.50					23,800	3.80	14,900	2.62	8.7
	EHD4X24A**	*9MPV075	TDR&TXV	23,000	0.76	11.20	13.50					23,800	3.78	14,800	2.60	8.7
	^EHD4X24A**	*9MPV100	TDR&TXV	23,200	0.76	11.50	14.00					23,600	3.86	14,900	2.66	8.8
	^EHD4X24A**	MV08B15****	TDR&TXV	23,400	0.76	11.70	14.00					23,600	3.90	14,700	2.68	8.9
	^EHD4X24A**	MV12F19****	TDR&TXV	23,400	0.76	11.70	14.00					23,600	3.94	14,700	2.70	9.0
	^EHD4X24A**	MV16J22****	TDR&TXV	23,400	0.76	11.70	14.00					23,600	3.96	14,600	2.72	9.0
	^EHD4X24A**	MV20N26****	TDR&TXV	23,200	0.76	11.70	14.00					23,600	3.90	14,500	2.68	8.9
	EHD4X30A**	†	TXV	23,000	0.76	10.80	13.00					23,200	3.56	15,200	2.52	8.3
	^EHD4X30A**	*8MPV050	TDR&TXV	23,400	0.76	11.50	14.00					22,800	3.70	14,800	2.62	8.6
	^EHD4X30A**	*9MPV050	TDR&TXV	23,400	0.76	11.50	14.00					23,000	3.70	14,700	2.62	8.6
	^EHD4X30A**	*9MPV075	TDR&TXV	23,400	0.76	11.50	14.00					23,000	3.68	14,700	2.62	8.6
	^EHD4X30A**	*9MPV100	TDR&TXV	23,400	0.76	11.50	14.00					22,600	3.78	14,900	2.70	8.8
	^EHD4X30A**	MV08B15****	TDR&TXV	23,400	0.76	11.70	14.00					22,800	3.78	14,500	2.68	8.8
	^EHD4X30A**	MV12F19****	TDR&TXV	23,400	0.76	12.00	14.00					22,600	3.82	14,500	2.70	8.8
	^EHD4X30A**	MV16J22****	TDR&TXV	23,800	0.76	12.00	14.00					22,400	3.86	14,700	2.76	9.0
	^EHD4X30A**	MV20N26****	TDR&TXV	23,800	0.76	12.00	14.00					22,600	3.84	14,600	2.74	8.9
	EMA4X24D**	†	TXV	22,800	0.76	10.80	13.00					24,400	3.70	15,200	2.52	8.5
	^FEM4X24****	†	TDR&TXV	23,000	0.76	11.50	14.00					23,800	3.72	14,600	2.60	8.5
	^FEM4X30****	†	TDR&TXV	23,400	0.76	11.70	14.00					23,600	3.84	14,600	2.66	8.8
	FS(M,U)4X30****	†	TDR&TXV	23,000	0.76	10.80	13.20					24,000	3.64	15,100	2.52	8.4
	FSA2X24****	†	TDR&TXV	22,400	0.76	10.40				13.00		23,600	3.46	14,600	2.44	8.0
N4H330AKB N4H330GKB	‡FS(M,U)4X30****	†	TDR&TXV	30,000	0.74	10.8	13.00					30,000	3.46	18,700	2.38	8.0
	ED*4X30B**	†	TXV	30,000	0.74	10.80			13.00			30,000	3.46	18,800	2.38	8.0
	ED*4X30B**	*8MPV050	TDR&TXV	30,000	0.74	11.00	13.20					30,000	3.46	18,500	2.40	8.0
	^ED*4X30B**	MV08B15****	TDR&TXV	30,000	0.74	11.50	14.00					30,000	3.60	18,300	2.48	8.2
	ED*4X30F**	†	TXV	30,000	0.74	10.80			13.00			30,000	3.46	18,800	2.38	8.0
	^ED*4X30F**	*8MPV075	TDR&TXV	30,000	0.74	11.50	14.00					30,000	3.56	18,200	2.46	8.2
	ED*4X30F**	*9MPV050	TDR&TXV	30,000	0.74	11.00	13.50					30,000	3.46	18,200	2.40	8.0
	ED*4X30F**	*9MPV075	TDR&TXV	30,000	0.74	11.20	13.50					30,000	3.48	18,300	2.42	8.0
	^ED*4X30F**	MV12F19****	TDR&TXV	30,000	0.74	11.50	14.00					30,000	3.72	18,300	2.54	8.5
	ED*4X36B**	†	TXV	30,000	0.74	10.80			13.00			30,000	3.50	18,800	2.40	8.0
	ED*4X36B**	*8MPV050	TDR&TXV	30,000	0.74	11.00	13.20					30,000	3.50	18,600	2.40	8.0
	^ED*4X36B**	MV08B15****	TDR&TXV	30,000	0.74	11.50	14.00					30,000	3.64	18,300	2.50	8.2
	ED*4X36F**	†	TXV	30,000	0.74	10.80			13.00			30,000	3.50	18,800	2.40	8.0
	^ED*4X36F**	*8MPV075	TDR&TXV	30,000	0.74	11.50	14.00					30,000	3.60	18,200	2.48	8.2
	ED*4X36F**	*9MPV050	TDR&TXV	30,000	0.74	11.20	13.50					30,000	3.48	18,300	2.42	8.0
	ED*4X36F**	*9MPV075	TDR&TXV	30,000	0.74	11.20	13.50					30,000	3.52	18,300	2.44	8.0
	^ED*4X36F**	MV12F19****	TDR&TXV	30,000	0.74	11.50	14.00					30,000	3.76	18,300	2.56	8.5
	ED*4X36J**	†	TXV	30,000	0.74	10.80			13.00			30,000	3.50	18,800	2.40	8.0
	^ED*4X36J**	*8MPV100	TDR&TXV	30,000	0.74	11.50	14.00					30,000	3.68	18,100	2.54	8.2
	^ED*4X36J**	*8MPV125	TDR&TXV	30,000	0.74	12.00	14.00					30,000	3.70	18,100	2.54	8.2
^ED*4X36J**	*9MPV100	TDR&TXV	30,000	0.74	11.50	14.00					30,000	3.66	18,200	2.52	8.2	

^ Indicates ENERGY STAR compliance for combinations with all three: SEER 14.0 or higher and EER 11.5 or higher and HSPF 8.2 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device.

COOLING & HEATING PERFORMANCE FOR COMBINATION RATINGS (continued)
Indoor Models

Outdoor Model	Current Indoor Model (‡ tested combo)	Furnace Model or Blower	Factory Installed	Cool (95 ° F)			SEER				Heat (47 ° F)		Heat (17 ° F)		HSPF		
				BTU/hr	S / T	EER	factory	with field TDR	with field R-410A TXV	with field R-410A TXV+TDR	BTU/hr	COP	BTU/hr	COP			
N4H330AKB N4H330GKB (continued)	^ED*4X36J**	MV16J22****	TDR&TXV	30,000	0.74	12.00	14.00					30,000	3.80	18,200	2.58	8.5	
	EMA4X36D**	†	TXV	30,000	0.74	10.80			13.00			30,000	3.48	18,800	2.38	8.0	
	EHD4X30A**	†	TXV	30,000	0.74	10.80			13.00			30,000	3.50	18,800	2.40	8.0	
	EHD4X30A**	*8MPV050	TDR&TXV	30,000	0.74	11.00	13.20					30,000	3.50	18,600	2.40	8.0	
	EHD4X30A**	*8MPV075	TDR&TXV	30,000	0.74	11.50	14.00					30,000	3.54	18,200	2.46	8.0	
	^EHD4X30A**	*8MPV100	TDR&TXV	30,000	0.74	11.50	14.00					30,000	3.56	18,100	2.48	8.2	
	^EHD4X30A**	*8MPV125	TDR&TXV	30,000	0.74	11.50	14.00					30,000	3.56	18,000	2.48	8.2	
	EHD4X30A**	*9MPV050	TDR&TXV	30,000	0.74	11.20	13.50					30,000	3.44	18,200	2.40	7.7	
	EHD4X30A**	*9MPV075	TDR&TXV	30,000	0.74	11.20	13.50					30,000	3.46	18,300	2.40	8.0	
	EHD4X30A**	*9MPV100	TDR&TXV	30,000	0.74	11.50	14.00					30,000	3.52	18,100	2.44	8.0	
	EHD4X30A**	*9MPV125	TDR&TXV	30,000	0.74	11.50	14.00					30,000	3.52	18,100	2.46	8.0	
	^EHD4X30A**	MV08B15****	TDR&TXV	30,000	0.74	11.50	14.00					30,000	3.64	18,300	2.50	8.2	
	^EHD4X30A**	MV12F19****	TDR&TXV	30,000	0.74	11.50	14.00					30,000	3.70	18,300	2.52	8.2	
	^EHD4X30A**	MV16J22****	TDR&TXV	30,000	0.74	12.00	14.00					30,000	3.68	18,100	2.54	8.2	
	^EHD4X30A**	MV20N26****	TDR&TXV	30,000	0.74	12.00	14.00					30,000	3.70	18,100	2.54	8.2	
	EHD4X36A**	†	TXV	30,000	0.74	11.00			13.20				30,000	3.64	18,900	2.44	8.2
	EHD4X36A**	*8MPV050	TDR&TXV	30,000	0.74	11.20	13.50						30,000	3.68	18,700	2.48	8.2
	^EHD4X36A**	*8MPV075	TDR&TXV	30,000	0.74	11.50	14.00						30,000	3.74	18,300	2.52	8.2
	^EHD4X36A**	*8MPV100	TDR&TXV	30,000	0.74	12.00	14.00						30,000	3.78	18,200	2.56	8.5
	^EHD4X36A**	*8MPV125	TDR&TXV	30,000	0.74	12.00	14.00						30,000	3.78	18,200	2.56	8.5
	^EHD4X36A**	*9MPV050	TDR&TXV	30,000	0.74	11.50	14.00						30,000	3.62	18,400	2.48	8.2
	^EHD4X36A**	*9MPV075	TDR&TXV	30,000	0.74	11.50	14.00						30,000	3.64	18,400	2.48	8.2
	^EHD4X36A**	*9MPV100	TDR&TXV	30,000	0.74	11.50	14.00						30,000	3.76	18,300	2.54	8.5
	^EHD4X36A**	*9MPV125	TDR&TXV	30,000	0.74	12.00	14.00						30,000	3.76	18,200	2.54	8.5
	^EHD4X36A**	MV08B15****	TDR&TXV	30,000	0.74	12.00	14.00						30,000	3.84	18,400	2.58	8.5
	^EHD4X36A**	MV12F19****	TDR&TXV	30,000	0.74	12.00	14.00						30,000	3.92	18,400	2.62	8.5
	^EHD4X36A**	MV16J22****	TDR&TXV	30,000	0.74	12.00	14.00						30,000	3.92	18,300	2.62	8.5
	^EHD4X36A**	MV20N26****	TDR&TXV	30,000	0.74	12.00	14.00						30,000	3.94	18,200	2.64	8.5
	FSU4X36****	†	TDR&TXV	30,000	0.74	10.70	13.00						30,000	3.48	18,800	2.38	8.0
	^FEM4X30****	†	TDR&TXV	30,000	0.74	11.50	14.00						30,000	3.60	18,300	2.46	8.2
FSM4X36****	†	TDR&TXV	30,000	0.74	11.00	13.20						30,000	3.60	18,900	2.42	8.2	
^FEM4X36****	†	TDR&TXV	30,000	0.74	11.50	14.00						30,000	3.72	18,500	2.50	8.5	
^FVM4X24****	†	TDR&TXV	30,000	0.74	11.50	14.00						30,000	3.56	18,000	2.48	8.2	
^FVM4X36****	†	TDR&TXV	30,000	0.74	12.00	14.00						29,800	3.56	17,800	2.48	8.2	
N4H336AKB	‡FSU4X36****	†	TDR&TXV	33,800	0.76	10.6	13.00					35,400	3.54	22,200	2.48	7.8	
N4H336GKB	ED*4X36B**	†	TXV	33,400	0.76	10.80			13.00			35,000	3.52	21,800	2.48	7.7	

^ Indicates ENERGY STAR compliance for combinations with all three: SEER 14.0 or higher and EER 11.5 or higher and HSPF 8.2 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device.

- continued on next page -

COOLING & HEATING PERFORMANCE FOR COMBINATION RATINGS (continued)
Indoor Models

Outdoor Model	Current Indoor Model (‡ tested combo)	Furnace Model or Blower	Factory Installed	Cool (95 ° F)			SEER				Heat (47 ° F)		Heat (17 ° F)		HSPF	
				BTU/hr	S / T	EER	factory	with field TDR	with field R-410A TXV	with field R-410A TXV+TDR	BTU/hr	COP	BTU/hr	COP		
N4H336AKB N4H336GKB (continued)	ED*4X36B**	*8MPV050	TDR&TXV	33,000	0.76	10.80	13.00					34,800	3.48	21,600	2.46	7.7
	ED*4X36B**	MV08B15****	TDR&TXV	34,000	0.76	11.20	13.50					34,800	3.64	21,800	2.56	8.0
	ED*4X36F**	†	TXV	33,600	0.76	10.70		13.00				35,200	3.56	22,000	2.50	7.8
	ED*4X36F**	*8MPV075	TDR&TXV	33,800	0.76	11.20	13.50					34,600	3.62	21,400	2.56	7.9
	ED*4X36F**	*9MPV050	TDR&TXV	33,400	0.76	10.80	13.20					35,000	3.52	21,600	2.50	7.7
	ED*4X36F**	*9MPV075	TDR&TXV	33,400	0.76	11.00	13.50					34,800	3.56	21,600	2.52	7.8
	^ED*4X36F**	MV12F19****	TDR&TXV	34,400	0.76	11.50	14.00					34,600	3.74	21,600	2.62	8.2
	ED*4X36J**	†	TXV	33,600	0.76	10.70		13.00				35,200	3.54	22,000	2.50	7.8
	^ED*4X36J**	*8MPV100	TDR&TXV	34,200	0.76	11.50	14.00					34,600	3.74	21,400	2.64	8.2
	^ED*4X36J**	*8MPV125	TDR&TXV	34,200	0.76	11.50	14.00					34,400	3.76	21,400	2.64	8.2
	ED*4X36J**	*9MPV100	TDR&TXV	34,000	0.76	11.50	14.00					34,600	3.70	21,600	2.60	8.1
	ED*4X42F**	†	TXV	33,800	0.76	10.80		13.00				35,000	3.58	22,200	2.52	7.9
	ED*4X42F**	*8MPV075	TDR&TXV	34,000	0.76	11.50	14.00					34,400	3.68	21,600	2.60	8.1
	ED*4X42F**	*9MPV050	TDR&TXV	33,600	0.76	11.00	13.20					34,800	3.56	21,800	2.52	7.8
	ED*4X42F**	*9MPV075	TDR&TXV	33,800	0.76	11.20	13.50					34,600	3.60	21,600	2.54	7.9
	^ED*4X42F**	MV12F19****	TDR&TXV	34,600	0.76	11.50	14.00					34,400	3.78	21,800	2.66	8.3
	ED*4X42J**	†	TXV	33,800	0.76	10.80		13.00				35,000	3.58	22,200	2.52	7.9
	^ED*4X42J**	*8MPV100	TDR&TXV	34,600	0.76	11.50	14.00					34,400	3.76	21,600	2.66	8.2
	^ED*4X42J**	*8MPV125	TDR&TXV	34,600	0.76	11.50	14.00					34,200	3.78	21,400	2.66	8.3
	^ED*4X42J**	*9MPV100	TDR&TXV	34,400	0.76	11.50	14.00					34,400	3.72	21,600	2.62	8.2
	ED*4X42L**	†	TXV	33,800	0.76	10.80		13.00				35,000	3.58	22,200	2.52	7.9
	^ED*4X42L**	*9MPV125	TDR&TXV	34,400	0.76	11.50	14.00					34,400	3.76	21,400	2.66	8.2
	EHD4X36A**	†	TXV	34,400	0.76	11.00		13.20				34,600	3.64	22,200	2.56	8.0
	EHD4X36A**	*8MPV050	TDR&TXV	34,000	0.76	11.00	13.20					34,600	3.58	21,800	2.54	7.9
	^EHD4X36A**	*8MPV075	TDR&TXV	34,600	0.76	11.50	14.00					34,200	3.72	21,600	2.62	8.2
	^EHD4X36A**	*8MPV100	TDR&TXV	34,800	0.76	11.50	14.00					34,200	3.80	21,600	2.68	8.3
	^EHD4X36A**	*8MPV125	TDR&TXV	34,800	0.76	11.70	14.50					34,000	3.82	21,400	2.68	8.3
	EHD4X36A**	*9MPV050	TDR&TXV	34,000	0.76	11.20	13.50					34,600	3.62	21,800	2.56	7.9
	EHD4X36A**	*9MPV075	TDR&TXV	34,200	0.76	11.20	13.50					34,400	3.64	21,600	2.58	8.0
	^EHD4X36A**	*9MPV100	TDR&TXV	34,800	0.76	11.50	14.00					34,200	3.76	21,600	2.64	8.2
	^EHD4X36A**	*9MPV125	TDR&TXV	34,800	0.76	11.50	14.00					34,200	3.78	21,600	2.66	8.3
	^EHD4X36A**	MV08B15****	TDR&TXV	35,000	0.76	11.50	14.00					34,200	3.76	21,800	2.66	8.3
	^EHD4X36A**	MV12F19****	TDR&TXV	35,200	0.76	11.50	14.00					34,200	3.82	21,800	2.68	8.4
	EHD4X42A**	†	TXV	34,600	0.76	11.00		13.20				34,200	3.64	22,200	2.58	8.0
	EHD4X42A**	*8MPV050	TDR&TXV	34,200	0.76	11.20	13.50					34,200	3.62	21,800	2.56	8.0
	^EHD4X42A**	*8MPV075	TDR&TXV	34,800	0.76	11.50	14.00					34,000	3.76	21,600	2.66	8.2
	^EHD4X42A**	*8MPV100	TDR&TXV	35,200	0.76	11.50	14.00					33,800	3.82	21,600	2.70	8.4
	^EHD4X42A**	*8MPV125	TDR&TXV	35,200	0.76	12.00	14.50					33,600	3.84	21,600	2.72	8.4
	EHD4X42A**	*9MPV050	TDR&TXV	34,400	0.76	11.20	13.50					34,200	3.64	21,800	2.58	8.0
	EHD4X42A**	*9MPV075	TDR&TXV	34,400	0.76	11.20	13.50					34,000	3.68	21,800	2.60	8.1

^ Indicates ENERGY STAR compliance for combinations with all three: SEER 14.0 or higher and EER 11.5 or higher and HSPF 8.2 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device.

- continued on next page -

COOLING & HEATING PERFORMANCE FOR COMBINATION RATINGS (continued)
Indoor Models

Outdoor Model	Current Indoor Model (‡ tested combo)	Furnace Model or Blower	Factory Installed	Cool (95 ° F)			SEER				Heat (47 ° F)		Heat (17 ° F)		HSPF	
				BTU/hr	S / T	EER	factory	with field TDR	with field R-410A TXV	with field R-410A TXV+TDR	BTU/hr	COP	BTU/hr	COP		
N4H336AKB N4H336GKB (continued)	^EHD4X42A**	*9MPV100	TDR&TXV	35,000	0.76	11.50	14.00					33,800	3.78	21,800	2.68	8.3
	^EHD4X42A**	*9MPV125	TDR&TXV	35,000	0.76	11.50	14.00					33,800	3.82	21,600	2.70	8.4
	^EHD4X42A**	MV08B15****	TDR&TXV	35,200	0.76	11.50	14.00					33,800	3.78	22,000	2.68	8.3
	^EHD4X42A**	MV12F19****	TDR&TXV	35,400	0.76	11.50	14.00					33,600	3.84	21,800	2.72	8.4
	EMA4X36D**	†	TXV	33,600	0.76	10.70		13.00				35,400	3.54	22,000	2.50	7.8
	^FEM4X36****	†	TDR&TXV	34,800	0.76	11.50	14.00					33,800	3.72	21,800	2.64	8.2
	^FEM4X42****	†	TDR&TXV	34,800	0.76	11.50	14.00					33,800	3.70	21,800	2.64	8.2
	FS(M,U)4X42****	†	TDR&TXV	34,200	0.76	10.80	13.00					34,200	3.54	22,200	2.52	7.9
	FSM4X36****	†	TDR&TXV	34,200	0.76	10.80	13.00					34,200	3.56	22,200	2.54	7.9
	FVM4X24****	†	TDR&TXV	33,600	0.76	11.50	14.00					34,800	3.66	21,200	2.58	8.0
	†FS(M,U)4X42****	†	TDR&TXV	40,500	0.76	10.5	13.00					42,000	3.54	26,400	2.46	8.1
	N4H342AKA N4H342GKA	ED*4X42F**	†	TXV	40,000	0.76	10.50		13.00				42,000	3.50	26,200	2.46
ED*4X42F**		*8MPV075	TDR&TXV	40,000	0.76	11.00	13.20					41,500	3.48	25,600	2.48	8.0
ED*4X42F**		*9MPV075	TDR&TXV	39,500	0.76	10.50	13.00					42,000	3.40	25,800	2.44	7.7
ED*4X42J**		†	TXV	40,000	0.76	10.50		13.00				42,500	3.50	26,200	2.46	8.0
ED*4X42J**		*8MPV100	TDR&TXV	41,000	0.76	11.20	13.50					42,500	3.62	26,000	2.54	8.3
ED*4X42J**		*8MPV125	TDR&TXV	41,000	0.76	11.20	13.50					42,000	3.62	25,800	2.56	8.3
ED*4X42J**		*9MPV100	TDR&TXV	40,500	0.76	11.00	13.50					42,000	3.54	25,800	2.50	8.1
^ED*4X42J**		MV16J22****	TDR&TXV	41,000	0.76	11.50	14.00					42,000	3.72	25,600	2.60	8.5
ED*4X42L**		†	TXV	40,000	0.76	10.50		13.00				42,500	3.50	26,200	2.46	8.0
ED*4X42L**		*9MPV125	TDR&TXV	40,500	0.76	11.20	13.50					42,000	3.58	25,600	2.54	8.3
ED*4X48F**		†	TXV	41,500	0.76	10.80		13.00				41,000	3.62	26,600	2.54	8.4
ED*4X48F**		*8MPV075	TDR&TXV	41,500	0.76	11.00	13.50					41,000	3.62	26,200	2.56	8.4
ED*4X48F**		*9MPV075	TDR&TXV	41,000	0.76	11.00	13.50					41,000	3.58	26,000	2.52	8.3
ED*4X48J**		†	TXV	41,000	0.76	10.80		13.00				42,000	3.62	26,400	2.52	8.3
ED*4X48J**		*8MPV100	TDR&TXV	41,500	0.76	11.20	13.50					41,500	3.74	26,200	2.60	8.6
ED*4X48J**		*8MPV125	TDR&TXV	41,500	0.76	11.20	13.50					41,500	3.76	26,000	2.62	8.6
ED*4X48J**		*9MPV100	TDR&TXV	41,000	0.76	11.20	13.50					41,500	3.68	26,000	2.56	8.4
^ED*4X48J**		MV16J22****	TDR&TXV	42,000	0.76	11.70	14.50					41,000	3.84	25,800	2.66	8.8
ED*4X48L**		†	TXV	41,000	0.76	10.80		13.00				42,000	3.62	26,400	2.52	8.3
ED*4X48L**		*9MPV125	TDR&TXV	41,500	0.76	11.20	13.50					41,500	3.72	25,800	2.60	8.5
EHD4X42A**		†	TXV	40,000	0.76	10.80		13.00				42,500	3.66	26,400	2.52	8.3
EHD4X42A**		*8MPV075	TDR&TXV	41,000	0.76	11.00	13.50					42,500	3.66	26,200	2.54	8.4
EHD4X42A**		*8MPV100	TDR&TXV	41,000	0.76	11.20	13.50					42,500	3.76	26,200	2.58	8.6
^EHD4X42A**		*8MPV125	TDR&TXV	41,000	0.76	11.50	14.00					42,000	3.76	26,000	2.60	8.6
EHD4X42A**		*9MPV075	TDR&TXV	40,500	0.76	11.00	13.50					42,000	3.58	26,000	2.50	8.2
EHD4X42A**		*9MPV100	TDR&TXV	40,500	0.76	11.20	13.50					42,000	3.68	26,000	2.56	8.4
EHD4X42A**		*9MPV125	TDR&TXV	40,500	0.76	11.20	13.50					42,000	3.74	26,000	2.58	8.5
^EHD4X42A**		MV16J22****	TDR&TXV	41,000	0.76	11.70	14.00					42,000	3.88	25,800	2.66	8.8
^EHD4X42A**		MV20N26****	TDR&TXV	41,000	0.76	11.70	14.00					41,500	3.80	25,400	2.64	8.7
EHD4X48A**		†	TXV	41,000	0.76	10.80		13.00				42,000	3.66	26,600	2.54	8.4
EHD4X48A**		*8MPV075	TDR&TXV	41,500	0.76	11.20	13.50					41,500	3.68	26,200	2.54	8.4
EHD4X48A**		*8MPV100	TDR&TXV	41,500	0.76	11.20	13.50					41,500	3.78	26,200	2.60	8.6
^EHD4X48A**	*8MPV125	TDR&TXV	41,500	0.76	11.50	14.00					41,500	3.80	26,000	2.62	8.7	
EHD4X48A**	*9MPV075	TDR&TXV	41,000	0.76	11.00	13.50					41,500	3.62	26,000	2.52	8.3	

^ Indicates ENERGY STAR compliance for combinations with all three: SEER 14.0 or higher and EER 11.5 or higher and HSPF 8.2 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device.

- continued on next page -

COOLING & HEATING PERFORMANCE FOR COMBINATION RATINGS (continued)
Indoor Models

Outdoor Model	Current Indoor Model (‡ tested combo)	Furnace Model or Blower	Factory Installed	Cool (95 ° F)			SEER				Heat (47 ° F)		Heat (17 ° F)		HSPF	
				BTU/hr	S / T	EER	factory	with field TDR	with field R-410A TXV	with field R-410A TXV+TDR	BTU/hr	COP	BTU/hr	COP		
N4H342AKA N4H342GKA (continued)	EHD4X48A**	*9MPV100	TDR&TXV	41,000	0.76	11.20	13.50					41,500	3.72	26,000	2.58	8.5
	^EHD4X48A**	*9MPV125	TDR&TXV	41,500	0.76	11.50	14.00					41,500	3.76	25,800	2.60	8.6
	^EHD4X48A**	MV16J22****	TDR&TXV	42,000	0.76	11.70	14.00					41,000	3.90	25,800	2.68	8.9
	^EHD4X48A**	MV20N26****	TDR&TXV	41,500	0.76	11.70	14.00					41,000	3.84	25,400	2.66	8.7
	EMA4X48D**	†	TXV	40,500	0.76	10.80		13.00				42,000	3.58	26,400	2.50	8.2
	FEM4X42****	†	TDR&TXV	41,000	0.76	11.20	13.50					42,000	3.68	25,800	2.56	8.2
	^FEM4X48****	†	TDR&TXV	42,000	0.76	11.50	14.50					40,500	3.70	25,800	2.62	8.5
	FS(M,U)4X48****	†	TDR&TXV	41,500	0.76	10.80	13.20					41,000	3.54	26,600	2.52	8.2
	FSM4X36****	†	TDR&TXV	41,000	0.76	10.80	13.00					42,500	3.56	26,400	2.48	8.2
	^FVM4X48****	†	TDR&TXV	42,000	0.76	12.10	14.00					40,500	3.60	25,800	2.50	8.3
	^FVM4X60****	†	TDR&TXV	42,500	0.76	12.40	14.00					39,500	3.64	25,800	2.54	8.4
	‡FS(M,U)4X48****	†	TDR&TXV	47,500	0.74	11	13.00					48,000	3.58	30,200	2.54	8.0
	ED*4X48F**	†	TXV	46,500	0.74	11.00		13.00				48,000	3.62	29,800	2.56	8.0
	ED*4X48J**	†	TXV	47,000	0.74	11.00		13.00				48,000	3.64	30,000	2.56	8.0
ED*4X48J**	*8MPV100	TDR&TXV	47,000	0.74	12.00	14.00					48,000	3.68	29,400	2.62	8.0	
ED*4X48J**	*8MPV125	TDR&TXV	47,000	0.74	12.00	14.00					48,000	3.70	29,400	2.62	8.0	
ED*4X48J**	*9MPV100	TDR&TXV	46,500	0.74	11.50	13.50					48,000	3.64	29,600	2.58	8.0	
^ED*4X48J**	MV16J22****	TDR&TXV	47,500	0.74	12.00	14.00					48,000	3.80	29,600	2.68	8.2	
ED*4X48L**	†	TXV	47,000	0.74	11.00		13.00				48,000	3.64	30,000	2.56	8.0	
ED*4X48L**	*9MPV125	TDR&TXV	46,500	0.74	12.00	14.00					48,000	3.66	29,400	2.60	8.0	
ED*4X60J**	†	TXV	48,000	0.74	11.50		13.50				45,500	3.54	30,200	2.60	8.0	
^ED*4X60J**	*8MPV100	TDR&TXV	48,000	0.74	12.00	14.00					46,000	3.66	29,600	2.66	8.2	
^ED*4X60J**	*8MPV125	TDR&TXV	48,000	0.74	12.00	14.00					46,000	3.68	29,400	2.68	8.2	
ED*4X60J**	*9MPV100	TDR&TXV	48,000	0.74	12.00	14.00					46,500	3.62	29,600	2.62	8.0	
^ED*4X60J**	MV16J22****	TDR&TXV	48,000	0.74	12.00	14.00					44,000	3.68	29,600	2.72	8.2	
ED*4X60L**	†	TXV	48,000	0.74	11.50		13.50				45,500	3.54	30,200	2.60	8.0	
ED*4X60L**	*9MPV125	TDR&TXV	48,000	0.74	12.00	14.00					46,500	3.64	29,600	2.64	8.0	
EHD4X48A**	†	TXV	47,500	0.74	11.00		13.00				48,000	3.70	30,000	2.58	8.0	
EHD4X48A**	*8MPV100	TDR&TXV	47,500	0.74	12.00	14.00					48,000	3.72	29,400	2.62	8.0	
^EHD4X48A**	*8MPV125	TDR&TXV	47,500	0.74	12.00	14.00					48,000	3.74	29,400	2.64	8.2	
EHD4X48A**	*9MPV100	TDR&TXV	47,000	0.74	11.50	13.50					48,000	3.66	29,600	2.58	8.0	
EHD4X48A**	*9MPV125	TDR&TXV	47,000	0.74	12.00	14.00					48,000	3.68	29,400	2.60	8.0	
^EHD4X48A**	MV16J22****	TDR&TXV	48,000	0.74	12.00	14.00					48,000	3.84	29,600	2.68	8.2	
^EHD4X48A**	MV20N26****	TDR&TXV	48,000	0.74	12.00	14.00					48,000	3.86	29,600	2.68	8.2	
EHD4X60A**	†	TXV	48,000	0.74	11.50		13.50				48,000	3.68	30,200	2.62	8.2	
^EHD4X60A**	*8MPV100	TDR&TXV	48,000	0.74	12.00	14.00					47,500	3.78	29,600	2.68	8.2	
^EHD4X60A**	*8MPV125	TDR&TXV	48,000	0.74	12.00	14.00					47,500	3.78	29,400	2.68	8.2	
^EHD4X60A**	*9MPV100	TDR&TXV	48,000	0.74	12.00	14.00					47,500	3.72	29,800	2.64	8.2	
^EHD4X60A**	*9MPV125	TDR&TXV	48,000	0.74	12.00	14.00					47,500	3.74	29,600	2.66	8.2	
^EHD4X60A**	MV16J22****	TDR&TXV	48,000	0.74	12.00	14.00					47,000	3.88	29,600	2.74	8.5	
^EHD4X60A**	MV20N26****	TDR&TXV	48,000	0.74	12.00	14.00					47,000	3.88	29,600	2.74	8.5	
EMA4X48D**	†	TXV	46,000	0.74	11.00		13.00				48,000	3.46	29,600	2.52	7.7	

^ Indicates ENERGY STAR compliance for combinations with all three: SEER 14.0 or higher and EER 11.5 or higher and HSPF 8.2 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device.

- continued on next page -

COOLING & HEATING PERFORMANCE FOR COMBINATION RATINGS (continued)
Indoor Models

Outdoor Model	Current Indoor Model (‡ tested combo)	Furnace Model or Blower	Factory Installed	Cool (95 ° F)			SEER				Heat (47 ° F)		Heat (17 ° F)		HSPF	
				BTU/hr	S / T	EER	factory	with field TDR	with field R-410A TXV	with field R-410A TXV+TDR	BTU/hr	COP	BTU/hr	COP		
N4H348AKB	^FEM4X48****	†	TDR&TXV	48,000	0.74	12.00	14.00					47,500	3.72	29,600	2.64	8.2
N4H348GKB	^FEM4X60****	†	TDR&TXV	48,000	0.74	12.00	14.00					46,000	3.76	29,600	2.72	8.2
(continued)	FS(M,U)4X60****	†	TDR&TXV	48,000	0.74	11.50	13.50					46,500	3.60	30,400	2.60	8.0
	^FVM4X48****	†	TDR&TXV	47,500	0.74	12.00	14.00					47,000	3.72	29,000	2.66	8.2
	^FVM4X60****	†	TDR&TXV	48,000	0.74	12.00	14.00					46,500	3.82	29,000	2.72	8.2
N4H360AKB	‡FS(M,U)4X60****	†	TDR&TXV	58,500	0.75	10.8	13.00					58,000	3.52	37,000	2.50	7.7
N4H360GKB	ED*4X60J**	†	TXV	58,000	0.75	10.80		13.00				57,500	3.52	36,600	2.50	7.7
	ED*4X60J**	*8MPV125	TDR&TXV	58,500	0.75	11.00	13.20					57,500	3.56	36,600	2.54	7.7
	ED*4X60J**	MV16J22****	TDR&TXV	59,000	0.75	11.20	13.50					57,500	3.64	36,600	2.58	7.7
	ED*4X60L**	†	TXV	58,000	0.75	10.80		13.00				57,500	3.52	36,600	2.50	7.7
	EHD4X60A**	†	TXV	58,500	0.75	10.80		13.00				58,000	3.56	36,600	2.52	7.7
	EHD4X60A**	*8MPV125	TDR&TXV	58,500	0.75	11.00	13.20					58,500	3.62	36,600	2.54	7.7
	EHD4X60A**	MV16J22****	TDR&TXV	59,500	0.75	11.20	13.50					58,000	3.70	36,600	2.60	8.0
	EHD4X60A**	MV20N26****	TDR&TXV	59,500	0.75	11.20	13.50					58,000	3.72	36,400	2.60	8.0
	FEM4X60****	†	TDR&TXV	59,000	0.75	11.20	13.50					57,000	3.66	36,200	2.58	7.7
	FVM4X60****	†	TDR&TXV	59,500	0.75	11.20	13.50					57,000	3.68	36,000	2.60	8.0

^ Indicates ENERGY STAR compliance for combinations with all three: SEER 14.0 or higher and EER 11.5 or higher and HSPF 8.2 or higher.

‡ For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device.



This product has been designed and manufactured to meet ENERGY STAR criteria for energy efficiency when matched with appropriate coil components. However, proper refrigerant charge and proper air flow are critical to achieve rated capacity and efficiency. Installation of this product should follow the manufacturer's refrigerant charging and air flow instructions. Failure to confirm proper charge and airflow may reduce energy efficiency and shorten equipment life.

OUTDOOR UNIT MODEL NUMBER IDENTIFICATION GUIDE (single phase)											
Digit Position:	1	2	3	4	5, 6	7	8	9	10	11	12
Example Part Number:	N	4	H	3	18	A	K	A	1	0	0
C = Comfortmaker Mainline N = Comfortmaker Entry BRANDING											
2 = R-22 4 = R-410A REFRIGERANT											
A = Air Conditioner H = Heat Pump TYPE											
3 = 13 SEER 4 = 14 SEER NOMINAL EFFICIENCY											
18 = 18,000 BTUH = 1½ tons 24 = 24,000 BTUH = 2 tons 30 = 30,000 BTUH = 2½ tons 36 = 36,000 BTUH = 3 tons 42 = 42,000 BTUH = 3½ tons 48 = 48,000 BTUH = 4 tons 60 = 60,000 BTUH = 5 tons NOMINAL CAPACITY											
A = Standard Grille G = Coil Guard Grille C = Coastal FEATURES											
K = 208/230-1-60 VOLTAGE											
Sales Code											
Engineering Revision											
Extra Digit											
Extra Digit											

ACCESSORIES PART NUMBER IDENTIFICATION GUIDE									
Digit Position:	1	2	3	4	5	6, 7	8, 9	10, 11	
Example Part Number:	N	A	S	A	0	01	01	CH	
N = Non-Branded BRANDING									
A = Accessory PRODUCT GROUP									
S = Split System (AC & HP) KIT USAGE									
A = Original B = 2nd Generation MAJOR SERIES									
0 = Generic or Not Applicable									
2 = R-22 4 = R-410A REFRIGERANT									
Product Identifier Number									
Package Quantity									
Type of Kit (Example: CH = Crankcase Heater)									

International Comfort Products, LLC
 Lewisburg, Tennessee 37091 USA
 www.GoComfortmaker.com