


Global Pipe Manufacturer

EASYFLEX



Stainless Steel Flexible Gas Connectors

Complete selection of flexible connectors for
gas appliance applications.

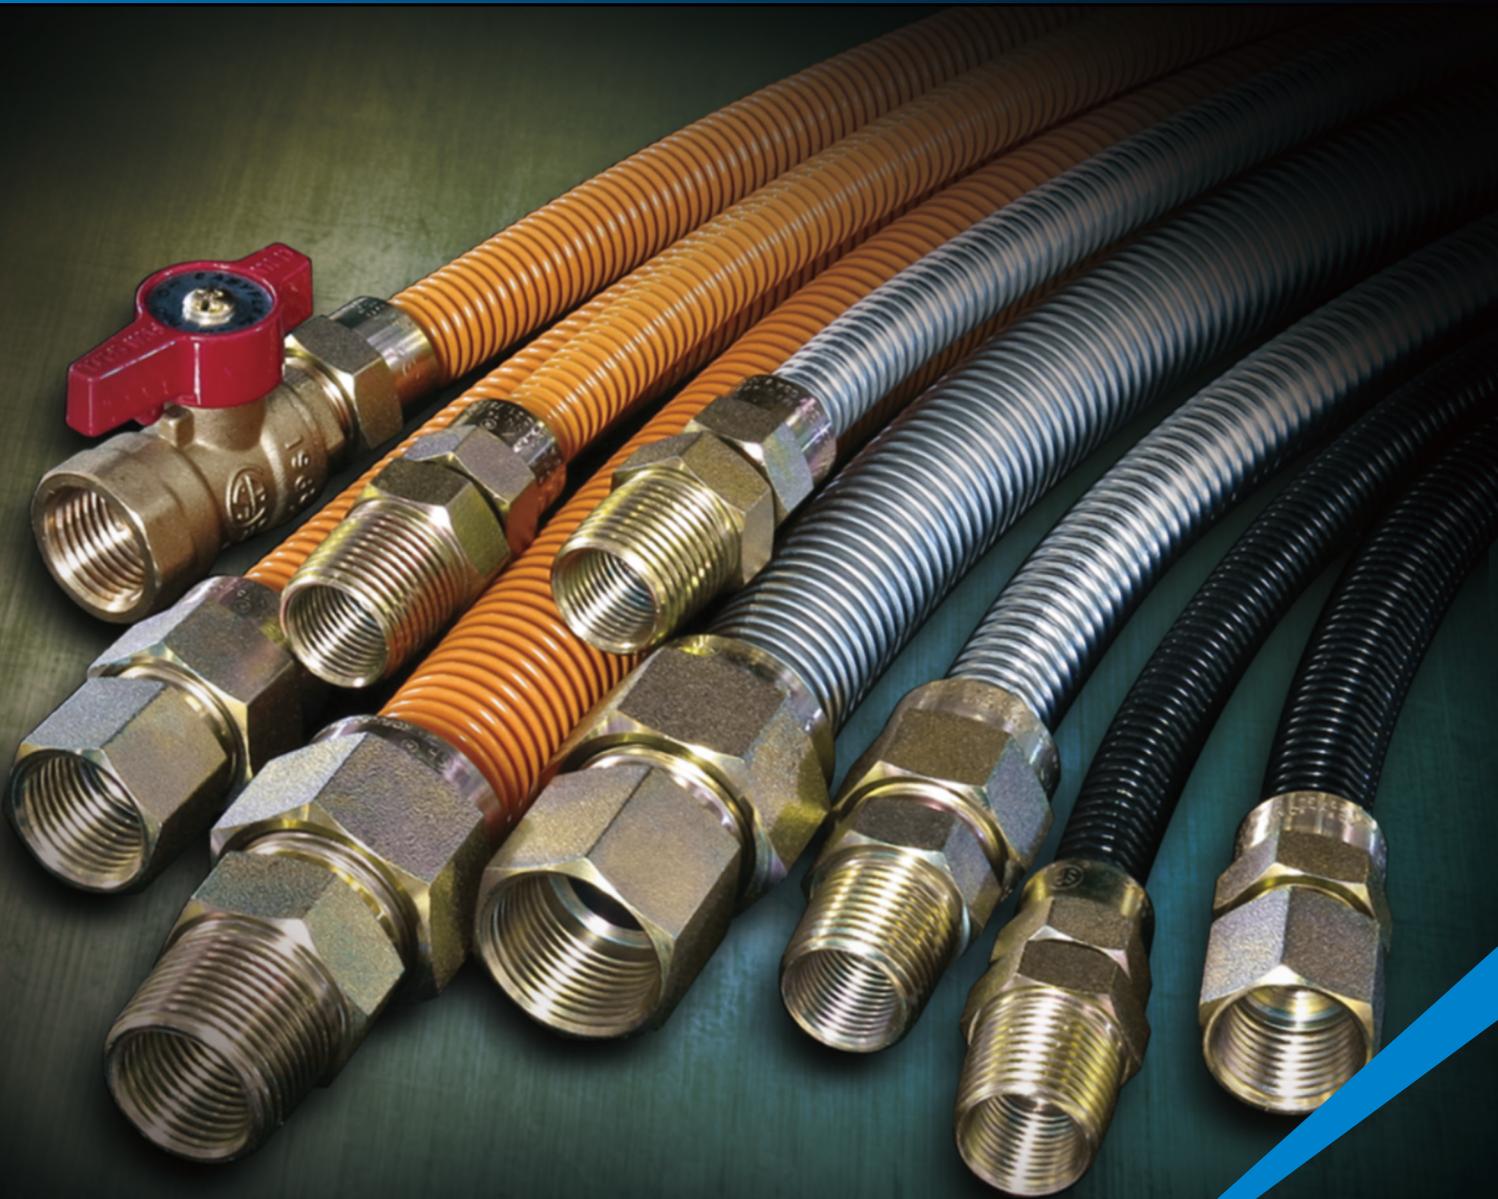


• Toll Free
(888) 577-8999

www.easyflexusa.com

Stainless Steel Flexible Gas Connectors



Applications : Dryers, Boilers, BBQ Grills, Ranges/ Ovens, Furnaces, Fireplaces, Space Heaters, Tankless Water Heaters, Rooftop Units, Manufactured Homes

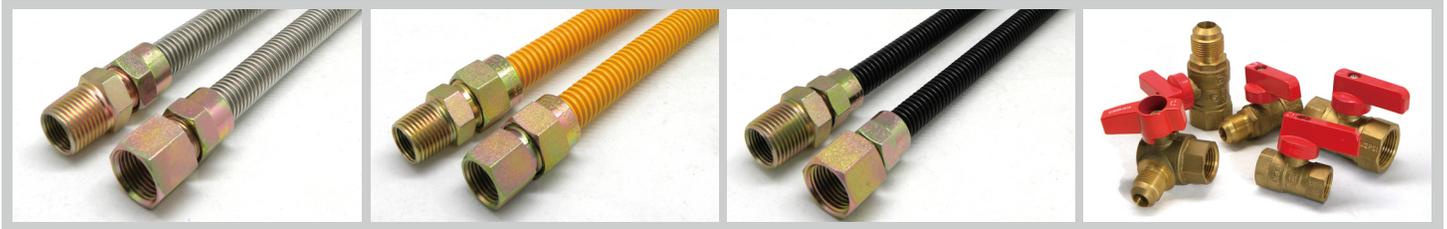

Availability

Types	<ul style="list-style-type: none"> Stainless Steel (Uncoated) Yellow Epoxy Coated Stainless Steel Black Epoxy Coated Stainless Steel 			
Lengths	12", 18", 24", 30", 36", 48", 60", 72"			
Sizes	3/8" OD (1/4" ID)	1/2" OD (3/8" ID)	5/8" OD (1/2" ID)	1" OD (3/4" ID)
Fittings & Valves	1/2" MIP (3/8" Tapped) 1/2" FIP 1/2" FIP Ball Valve 1/2" FIP Angle Valve	3/8" MIP (1/4" Tapped) 3/8" FIP	3/4" MIP (1/2" Tapped) 3/4" FIP 3/4" FIP Ball Valve 3/4" FIP Angle Valve	1" MIP (3/4" Tapped) 1" FIP

Materials

- Tubing : Stainless Steel 304 (ASTM A240)
- Fittings : Zinc-Plated Steel S45C
- Coating : Epoxy

Specifications

- Rated Pressure : 0.5 psi
- Rated Operating Temperature : -40°F to 150°F
(-40°C to 65°C)

Certifications & Listings

- ANSI Z21.24 / CSA 6.10 Gas Appliances
- ANSI Z21.69 / CSA 6.16 Movable Gas Appliances
- ANSI Z21.75 / CSA 6.27 Outdoor Gas Appliances & Manufactured Homes
- Commonwealth of Massachusetts Board of State Examiners
- City of New York-MEA #376-92-M