


Global Pipe Manufacturer
EASYFLEX®



Stainless Steel Flexible Water Heater Connectors

Kink-free, durable and maximum water flowing connectors

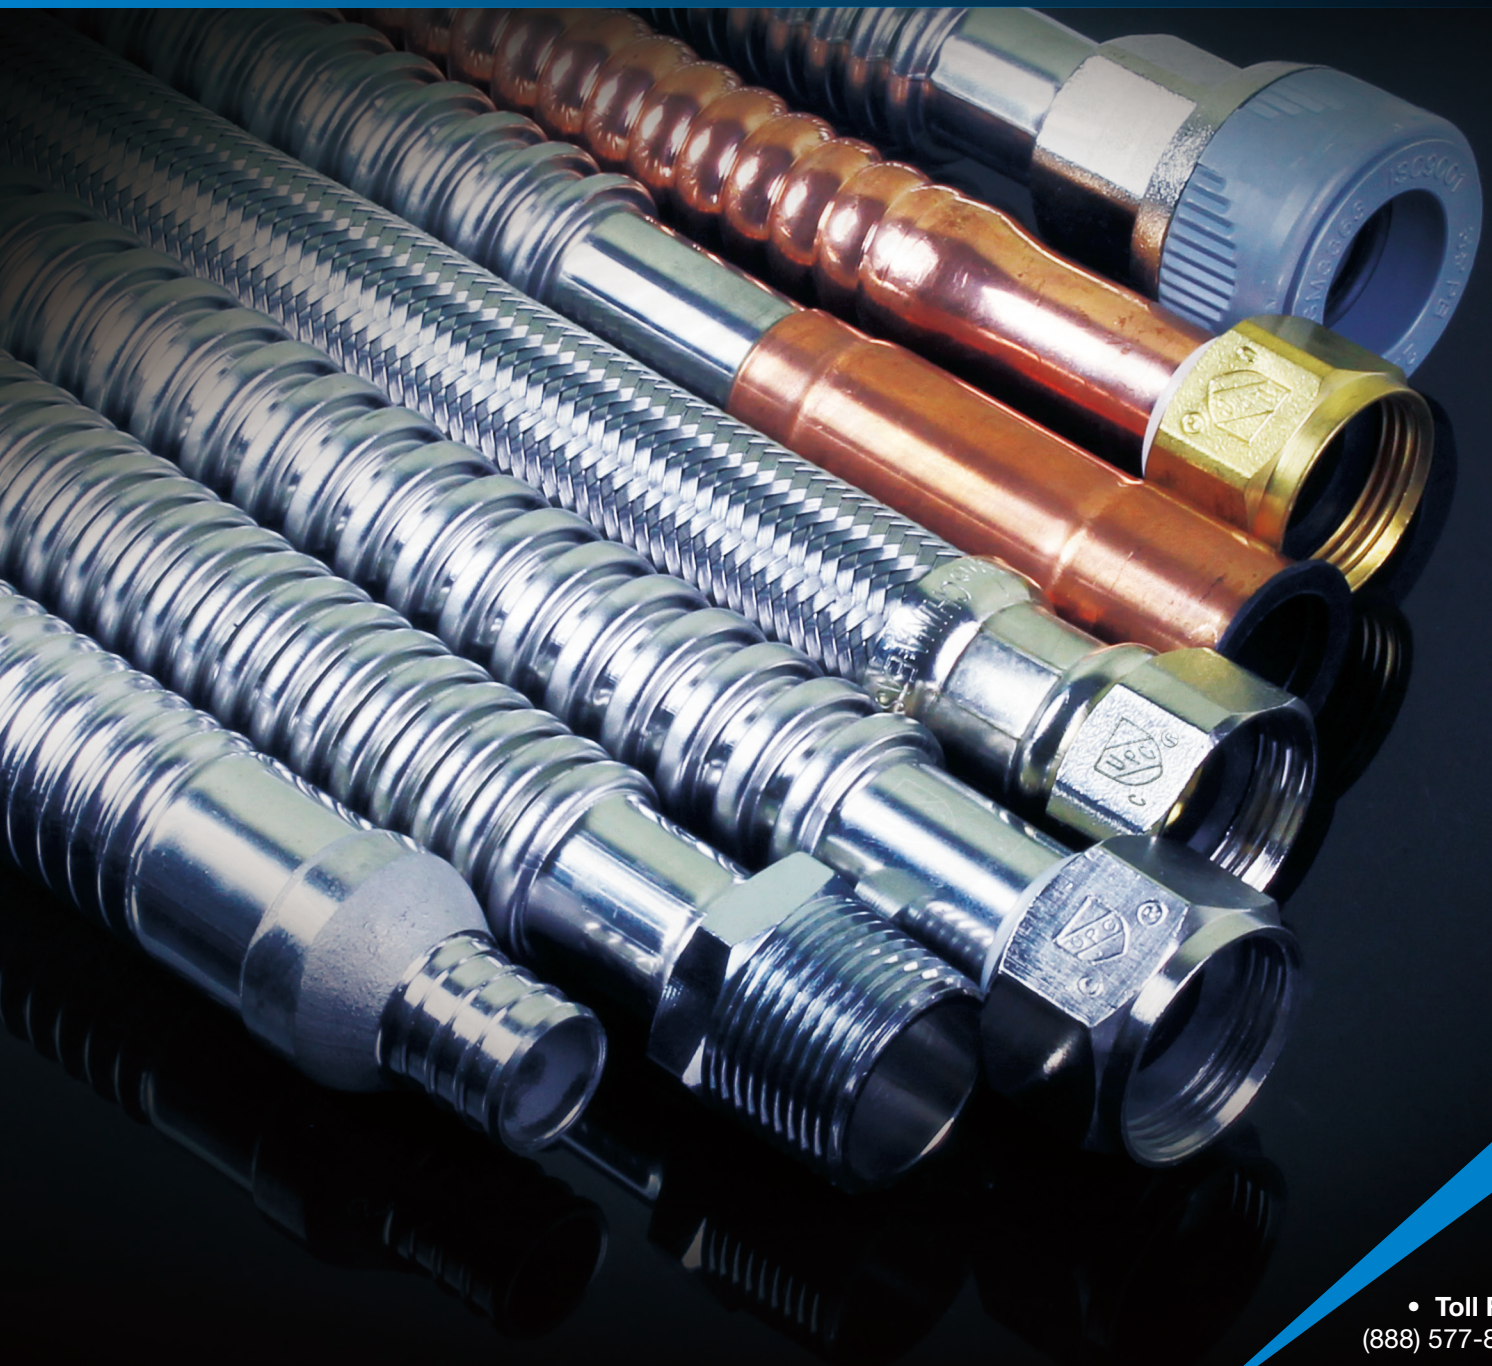

• Toll Free
(888) 577-8999






www.easyflexusa.com

Stainless Steel Flexible Water Heater Connectors



Applications : Boilers, Water Heaters, Tankless Water Heaters

Fittings & Lengths

Lengths	12", 15", 18", 24", 36", 48"				
Sizes	<div>3/4" ID</div> 	<div>1" ID</div> 	<div>1-1/4" ID</div> 	<div>1-1/2" ID</div> 	<div>2" ID</div> 
Fittings	3/4" FIP x 3/4" FIP 3/4" FIP x 3/4" MIP 3/4" FIP x 3/4" Push-Fit 3/4" FIP x 3/4" Sweat 3/4" FIP x 3/4" PEX 3/4" FIP x 1" FIP	1" FIP x 1" FIP 1" FIP x 1/4" FIP	1-1/4" FIP	1-1/2" FIP	2" FIP

Specifications & Materials

- Tubing : Stainless Steel 304 (ASTM A240)
- Fittings : Chrome-Plated Brass 3771
- Gasket : High-Quality EPDM
- Operating Pressure : Up to 125psig
- Intermittent Impulse Pressure : Up to 180 psig
- Temperature : -40°F to 180°F (-40°C to 82°C)
- 100% Leak Tested

Certifications & Approvals

- IAPMO/ UPC Certified
- ASME A 112.18.6/ CSA B 125.6
- NSF 61 Compliant
- NSF 372 Compliant : Lead-Free

