



Ebrilsmart universal self flare fittings eliminate the need for flare tools; with an easy three step installation. For use with all refrigerants (HCFC, HFC, HC) and both copper and aluminum tubes.

-EBRILLE-
INDUSTRIES



UNIVERSAL SELF FLARE FITTINGS

TECHNICAL CHARACTERISTICS:

- Working temperature: -49°F to 302°F (-45°C to 150°C)
- Maximum operating pressure: approx. 652 psi (45 bar)
- Suitable for all refrigerants HCFC, HFC, HC
- Triple metallic seal
- Compatible with traditional 45° flare fittings
- The use of a torque wrench for the installation is not required
- To be used exclusively on R220 annealed copper tubes and OH111 aluminium tubes

CERTIFICATIONS:

- Conformity with European Directives (PED, RoHS, and REACH)
- Superior performance to the traditional 45° flare fittings

For Copper and Aluminum Tubes

FOR ALL REFRIGERANTS

Ebrilsmart

UNIVERSAL SELF FLARE FITTINGS



3 STEP EASY INSTALL

View our tutorial video online: <https://youtu.be/wxUOChzw2Jo>

- No flare tool required


INSERT



TIGHTEN



TURN

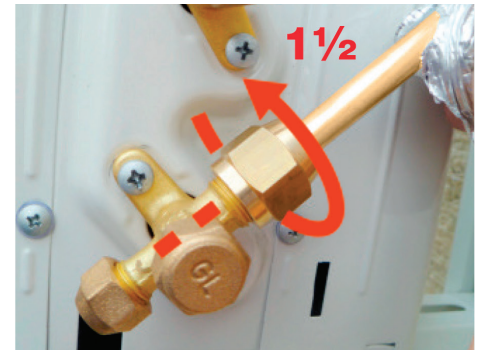

- Ensure:
 - Bevel of sleeve is toward nut.
 - Lubricate the inner surface of the nut.
- Apply pressure to hold tube against male flare body while hand tightening and **then mark the starting alignment before final turn**. If necessary, maintain pressure on tube until nut tightening prevents tube drift.
- Turn **only** 1 and 1/2 turns with wrench.

Ebrilsmart

Part Number	Description	Case Qty
ES14	1/4" Flare Fitting 2 pack	24
ES38	3/8" Flare Fitting 2 pack	24
ES12	1/2" Flare Fitting 2 pack	24
ES58	5/8" Flare Fitting 2 pack	24
ES DISPLAY	Counter Display	1



Counter Display Available

FREE WITH QUALIFYING PURCHASE OF **24 SELF FLARE FITTING PACKS** OF ANY SIZE / ASSORTMENT

Trust the **(G)**
www.globalthesource.com