

Inverter Driven Heat Pump
30,000 BTU Circular Flow Cassette

Job Name _____
 Location _____
 Engineer _____
 Submitted To _____
 Submitted By _____
 Reference _____

Date _____
 Approval _____
 Construction _____
 Unit No _____
 Drawing No _____

PRODUCT FEATURES

- 360° Circular flow distributes air more evenly around the room
- Adjustable louver swing
- Adjustable airflow
- Optional human sensor detects room occupancy for energy savings
- 7mm High density heat exchanger
- Seamless airflow louver
- Grille available in White (UTG-GCGF) or Black (UTG-LCGVCB), sold separately


MODEL NUMBERS

Indoor Unit	AUU30RGLX
Outdoor Unit	AOU30RGLX
System	30RGLXC

EFFICIENCIES

SEER	18.6
EER	11.7
HSPF	11.5
COP	13.5

OUTDOOR TEMPERATURE OPERATION RANGE

Cooling	*F(°C)	-5 to 115 (-20 to 46)
Heating		-5 to 75 (-20 to 24)

CAPACITIES

	Rated	Min.-Max.	BTU/hW
Cooling			30,000
			9,600-35,000
Heating			32,000
			9,200-39,000

LINESET REQUIREMENTS

Connection Method		Flare
Liquid	in (mm)	Ø 3/8 (9.52)
		Ø 5/8 (15.88)
Pre-Charge Length	ft (m)	65 (20)
Minimum Length		16 (5)
Maximum Length		164 (50)
Max. Height Diff.		98 (30)

INDOOR DIMENSIONS & WEIGHT

Net (H x W x D)	in	11-5/16 x 33-1/16 x 33-1/16
	mm	288 x 840 x 840
Gross (H x W x D)	in	13-3/8 x 37-13/16 x 37-3/8
	mm	340 x 960 x 950
Net Weight	lb (kg)	57 (26)
Gross Weight		66 (30)

OUTDOOR DIMENSIONS & WEIGHT

Net (H x W x D)	in	32-11/16 x 35-7/16 x 13
	mm	830 x 900 x 330
Gross (H x W x D)	in	39-3/8 x 41-5/16 x 17-1/2
	mm	1,000 x 1,050 x 445
Net Weight	lb (kg)	134 (61)
Gross Weight		152 (69)

Warranty Information


7 Year Compressor, 5 Year Parts out-of-the-box Warranty



10 Year Compressor, 10 Year Parts Warranty when registered within 30 days of installation in a residence



12 Year Compressor, 12 Year Parts Warranty when registered within 30 days of installation in a residence, and installed by a Fujitsu Elite contractor

ACCESSORIES

UTG-GCGF	White Cassette Grille
UTG-LCGVCB	Black Cassette Grille
UTY-RNRUZ2	Wired Remote Control
UTY-RSRY	Simple Remote Control
UTY-LBTUC	IR Receiver Kit w/ Wireless Remote
UTY-SHZXC	Human Sensor Kit
UTY-TTRX	Third Party Thermostat Adapter
UTY-TFSXZ2	WiFi Module



Indoor Unit ETL#: 3170288
 Outdoor Unit ETL#: 91987

Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation
<https://portal.fujitsugeneral.com>

Inverter Driven Heat Pump

30,000 BTU Circular Flow Cassette

FAN DATA

Indoor Unit Airflow Rate	Cooling	High	CFM (m3/h)	942 (1,600)
		Medium		824 (1,400)
		Low		748 (1,270)
		Quiet		677 (1,150)
	Heating	High		942 (1,600)
		Medium		824 (1,400)
		Low		748 (1,270)
		Quiet		677 (1,150)
Outdoor Unit Airflow Rate	Cooling		2,119 (3,600)	
	Heating		2,119 (3,600)	

SOUND PRESSURE

Indoor Unit	Cooling	High	dB (A)	40
		Medium		38
		Low		36
		Quiet		33
	Heating	High		40
		Medium		38
		Low		36
		Quiet		33
Outdoor Unit	Cooling		53	
	Heating		55	

REFRIGERANT

Type	R410A		
Charge	lb oz	4 lb 10.1oz	
	g	2,100	
Oil Type	POE (RB68)		

CASSETTE GRILL (SOLD SEPARATELY)

Color	UTG-GCGF	White	
	UTG-LCGVB	Black	
Dimensions (H x W x D)	Net	in (mm)	2- 1/16 x 37-3/8 x 37 3/8 (53 x 950 x 950)
			Gross
Weight	Net	lb (kg)	13 (6.0)
			Gross

ELECTRICAL SPECIFICATIONS

Voltage/Frequency/Phase			208-230V/60Hz/1	
Voltage Range			187-253 V	
Current	Cooling	Rated	A	11.5
	Heating	Rated		10.7
Maximum Operating Current		Cooling		15.6
	Heating	16.1		
Starting Current			11.5	
MCA			20.8	
Maximum Circuit Breaker			30	
Input Power	Cooling	Rated	kW	2.57
		Min.-Max.		0.60-3.33
Heating	Rated	2.38		
	Min.-Max.	0.52-3.27		
Power Factor	Cooling		%	97
	Heating			97
OTHER				
Moisture Removal		pints/h (L/h)		5.3 (3.0)
Energy Star		No		
Drain hose		Material		PVC (VP25)
		Size		in (mm) Ø 1 (25) (I.D.), Ø 1-1/16 (26.6)
Operation Range	Cooling	°F (°C)		64 to 90 (18 to 32)
		%RH		80 or less
Heating	°F (°C)		60 to 86 (16 to 30)	

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Halcyon logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2018 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.


Note: Specifications are based on the following conditions:
 Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit - indoor unit).

Inverter Driven Heat Pump


30,000 BTU Circular Flow Cassette

DIMENSIONS



Units: In. (mm)

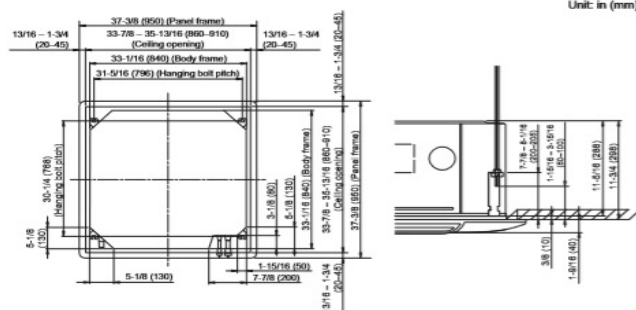

• Refrigerant piping and drain piping positions

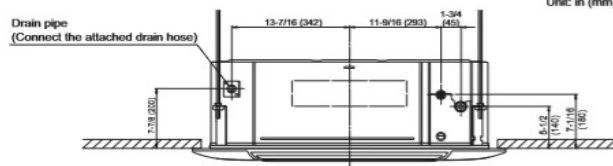

• Airflow split-flow duct and fresh-air inlet positions

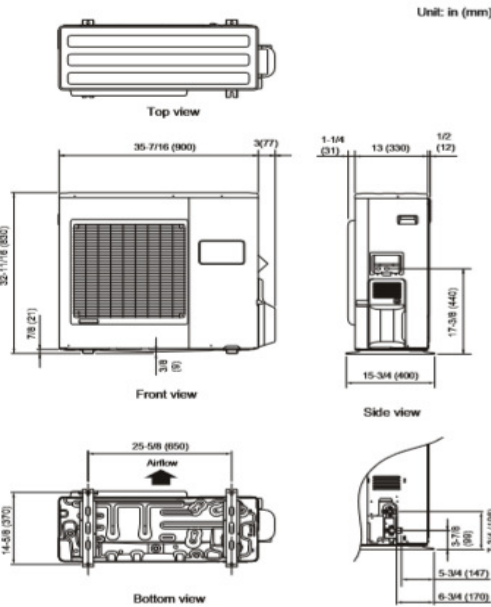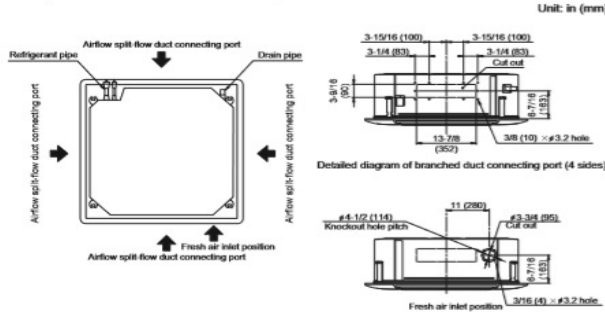

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Halcyon logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2018 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.

Note: Specifications are based on the following conditions:
 Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit - indoor unit).