



Wall Mounted 30,000 BTU System SYSTEM 30RLX

Function

This wall mounted heat pump provides both heating and cooling for year-round comfort. Ultra compact yet efficient, System 30RLX provides maximum comfort in 30% less space while saving you money. Additionally, System 30RLX provides low ambient operation rated down to 0°F right out of the box without modification.

Applications

The flexibility of the variable speed compressor helps systems adapt to shifts in heat load by occupants or fluctuating heat generated by computers. Fujitsu brand ductless air conditioners can be used to solve various application-specific problems. Businesses and institutions such as schools, churches, nursing homes and hospitals, commercial office buildings, strip malls, motels and restaurants, apartments and condos, computer and telephone switching rooms, and even residences commonly use these systems. With more efficient zone control, "ductless mini-splits" are perfect for renovations, restorations, conversions, and add-ons.



17.5-SEER

Optional Remote

- Weekly Timer
- Full Function Wired Remote
- Child Lock Capable

UTY-RNBYU



Standard Features

- Wireless Remote Control
- Sleep Timer
- 24 Hour Timer
- Dry Mode
- Auto Louver: 4 Way
- Auto Mode
- Quiet Mode
- Power Diffuser
- Auto Restart/Reset
- Low Ambient
- Cold Prevention
- Apple Catechin Filter
- Ion Deodorizing Filter
- Auto Changeover
- Economy Mode
- Minimum Heat



FUJITSU

Built In Filtration




Long-life* Ion Deodorization Filter
The filter deodorizes by powerfully decomposing absorbed odors using the oxidizing and reducing effects of ions generated by the ultra-fine-particle ceramic.




Apple-Catechin Filter
Dust, mold spores and microorganisms are absorbed onto the filter by static electricity and growth is inhibited and deactivated.

FRONT OF INDOOR UNIT

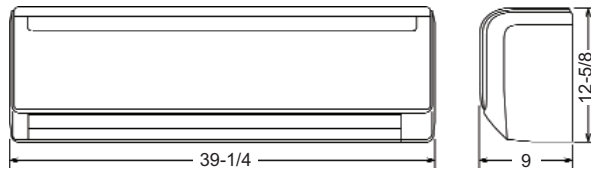

OUTDOOR UNIT AOU30RLX

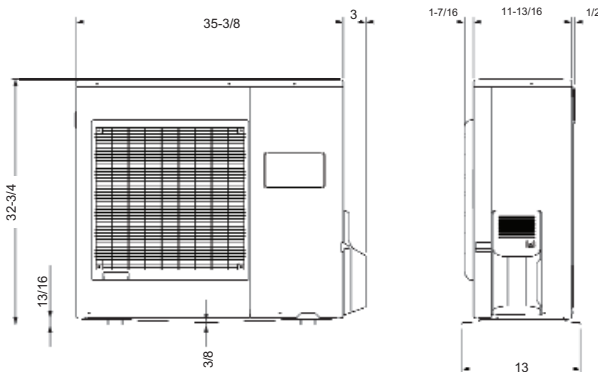

+ The filter can be used for approximately 3 years if it is washed with water when dirty to restore its surface action.

The Fujitsu logo is a registered trademark of Fujitsu Limited.
The Halcyon logo and name is a trademark of Fujitsu General America, Inc. Copyright 2010 Fujitsu General America, Inc.

Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.

FOR MORE INFORMATION:

Part # 6-26-FG2010
Rev. 9/10

30RLX

Heat Pump

Nominal Cooling <i>BTU/h</i>	30,000
Min.~Max. Cooling <i>BTU/h</i>	9,900~32,400
Nominal Heating <i>BTU/h</i>	32,000
Min.~Max. Heating <i>BTU/h</i>	8,000~37,500
HSPF <i>BTU/hW</i>	9.5
SEER <i>BTU/hW</i>	17.5
EER <i>Clg/Htg</i>	10.0
Clg. Operating Range °F(°C)	0~115 (-18~46)
Htg. Operating Range °F(°C)	0~75 (-18~24)
Moisture Removal <i>Pt./h(l/h)</i>	9.5 (4.5)
Voltage/Frequency/Phase	208-230/60/1
Recommended Fuse Size (A)	30
Air Circ. <i>C.F.M. (m³/h)</i> : Hi	659 (1,120)
Medium	530 (900)
Low	435 (740)
Quiet	365 (620)
Noise Level <i>dB(A)</i> : Hi	49/49 (Clg/Htg)
Medium	42/42 (Clg/Htg)
Low	37/37 (Clg/Htg)
Quiet	33/33 (Clg/Htg)
Outdoor Fan Speed <i>RPM Clg/Htg</i>	850/850
Outdoor Noise Level <i>dB(A)</i>	54/55 (Clg/Htg)
Current <i>Rated/Max (A)</i> : Cooling	13.2/17.0
Heating	13.1/18.5
Power Use <i>Rated/Max (kW)</i> : Cooling	3.0/3.87
Heating	2.99/4.22
Fan Speeds <i>Stage</i>	4 + Auto
Air Direction: <i>Horizontal</i>	Automatic
<i>Vertical</i>	Automatic
Air Filter	Washable
ENERGY STAR® Qualified	No
Connection Method	Flare
Combined Max. Lgth <i>Ft (m)</i>	164 (50)
Max. Vertical Diff. <i>Ft (m)</i>	98 (30)
Conn. Pipe Diameter <i>Inch</i>	Suc. 5/8 Dis. 3/8
Net Weight <i>lbs. (kg)</i>	31 (14) 137(62)
Dimensions: Height <i>Inch</i>	12-5/8 32-3/4
<i>mm</i>	320 830
Width <i>Inch</i>	39-1/4 35-3/8
<i>mm</i>	998 900
Depth <i>Inch</i>	9 13
<i>mm</i>	228 330
Refrigerant	R410A

Indoor
ASU30RLX

Outdoor
AOU30RLX

Note: Figures are based on 230 Volts.

FUJITSU

FUJITSU GENERAL AMERICA, INC.
353 Route 46 West • Fairfield, NJ 07004
Tel: (973) 575-0380 • Fax: (973) 836-0448
www.fujitsugeneral.com