

Submittal Data: System 18RLQ ASU18RLQ & AOU18RLQ



Job Name: _____ Location: _____

Purchaser: _____

Engineer: _____

Submitted To: _____ For: Reference Approval Construction

Submitted By: _____

Capacities:

Cooling	18,000 BTU/h
Min/Max Cooling	5,500/19,000
Outdoor Design Temperature <i>F° DB/WB</i>	95/75
Heating	21,600 BTU/h
Min/Max Heating	4,600/29,000
Outdoor Design Temperature <i>F° DB/WB</i>	47/43
HSPF	10
SEER	19
EER <i>Cooling/Heating</i>	10.4/11.2
Low Ambient Temp. <i>F° Cooling/Heating</i>	14/5
Voltage/Frequency/Phase	208-230/60/1

Indoor Unit:

Noise Level Cooling <i>db (A) - H/ M/ L/ Q</i>	45/ 39/ 33/ 25
Noise Level Heating <i>db (A) - H/ M/ L/ Q</i>	42/ 38/ 33/ 27
Weight	22 lbs.

Outdoor Unit:


Noise Level <i>db (A) - Cooling/Heating</i>	50/50
Recommended Fuse Size	20A
Min. Ampacity	16A
Running Current Cooling <i>(Rated/Max)</i>	7.7/9
Running Current Heating <i>(Rated/Max)</i>	8.6/13.50
Weight	88 lbs.

Refrigerant Piping:

Max Ht. Difference	49 ft.
Max Total or Combined Length	66 ft.
Discharge Vapor Line (O.D.)	1/4 in.
Suction (O.D.)	1/2 in.

Note: Figures are based on 230 Volts

OUTLINE AND DIMENSIONS

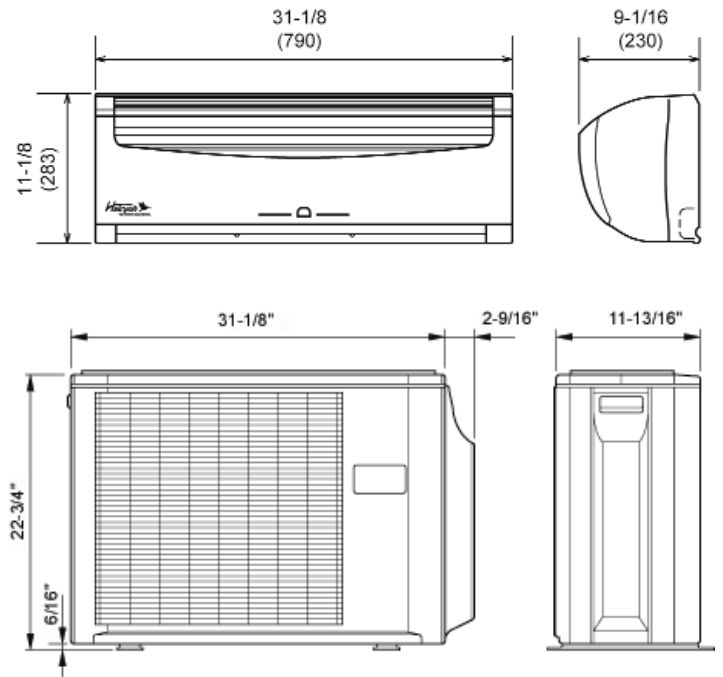

Standard Features:

- ◆ Six year compressor warranty
- ◆ Two year parts warranty
- ◆ Refrigerant R410A
- ◆ Plasma filter
- ◆ Auto Mode; Dry mode
- ◆ Optional Wired Remote Control
- ◆ Sleep timer; 24 hour timer
- ◆ Built in Low Ambient
- ◆ Auto Restart/ Reset
- ◆ Cold Prevention
- ◆ Auto Louvre: Up/Down
- ◆ Digital Wireless Remote Control

Notes:
