

# Submittal Data: ASU24RLF




Job Name: \_\_\_\_\_ Location: \_\_\_\_\_  
Purchaser: \_\_\_\_\_  
Engineer: \_\_\_\_\_  
Submitted To: \_\_\_\_\_ For:  Reference  Approval  Construction  
Submitted By: \_\_\_\_\_  
Unit Designation: \_\_\_\_\_ Schedule No. \_\_\_\_\_ Model No.: \_\_\_\_\_

### Capacities:

Cooling	24,000 BTU/h
Outdoor Design Temp. <i>F° DB/WB</i>	95/75
Heating	27,000 BTU/h
Outdoor Design Temperature <i>F° DB/WB</i>	47/43
HSPF	
Ducted	9.3
Non-Ducted	9.8
Mixed	9.5
SEER	
Ducted	14.7
Non-Ducted	17.0
Mixed	15.8
EER <i>Cooling</i>	
Ducted	8.7
Non-Ducted	9.25
Mixed	8.97
Voltage/Frequency/Phase	208-230/60/1
<b>Indoor Unit:</b>	
Noise Level Cooling <i>db (A) - H/ M/ L/ Q</i>	49/42/37/33
Noise Level Heating <i>db (A) - H/ M/ L/ Q</i>	48/42/37/33
Weight	31 lbs.
<b>Refrigerant Piping:</b> *	
Discharge Vapor Line (O.D.)	1/4 in.
Suction (O.D.)	5/8 in.

### OUTLINE AND DIMENSIONS

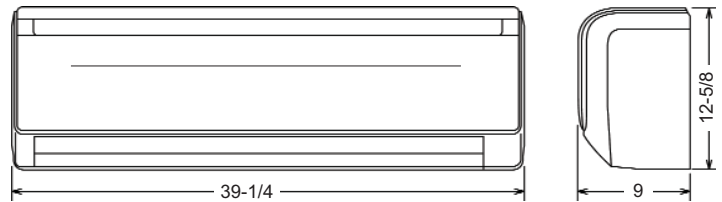

### Standard Features:

- ◆ Seven year compressor warranty
- ◆ Five year parts warranty
- ◆ Digital wireless remote control
- ◆ Auto Louver: Up/Down
- ◆ Apple Catechin / Ion Deodorizing Filters
- ◆ Sleep Timer
- ◆ Auto Restart/ Reset
- ◆ 24 hour timer
- ◆ Quiet Mode
- ◆ Dry mode
- ◆ Refrigerant R410A

### Notes:

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

\*Piping lengths vary by outdoor unit. See outdoor unit submittal sheet for detailed specifications.

