


Submittal Data: DUCT24HP230V1AD		24,000 BTU/H Ceiling Cassette	
Job Name		Location	Date
Purchaser		Engineer	
Submitted To		For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Unit Designation		Schedule No.	
GENERAL FEATURES -Quiet Operation -Multi-Speed Fan -Medium Static Pressure Capability -Slim Line Construction 8" high -Internal Condensate Drain Pump -Return Air From Rear Only -XK-19 Wired Controllers -Wireless Remote Controllers -Sentry Condensate Overflow Protection -Limited 5 yr. Parts Warranty			
System Ratings		Units Specification & Data	
Cooling* Rated Capacity 23,800 BTU/H Heating* Rated Capacity 27,400 BTU/H Sound Level (Hi/Lo)** Cooling 42/34 dbA Heating 42/34 dbA Air Flow (min/max) Indoor Fan 324/589 CFM Ext Static Pressure (max/min) 0.040/0.035 inch wg		Wired Controller XK-19 Condensate Drain Lift (Height) 18-in 457-mm Drain Size (OD) 1.0-in 26-mm	
Electrical Ratings		Refrigerant Piping Data	
Fan Motor Output Power 124 W FLA 0.54 A Power Supply Normal Operational Voltage 208/230 V, 1 Phase, 60 Hz Voltage Range 187 - 253 V MCA 1.0 A Interconnecting Cable Wire Size 14-4 AWG		Refrigerant Type R410A Gas Pipe Size (OD) 5/8-in Liquid Pipe Size (OD) 3/8-in Connection Method Flared	
		* Test conditions are based on AHRI 210/240. **Sound Level ratings are per AHRI 270 and AHRI 350	



24,000 BTUH MODEL

Model # DUCT24HP230V1AD 24,000 BTUH 230V

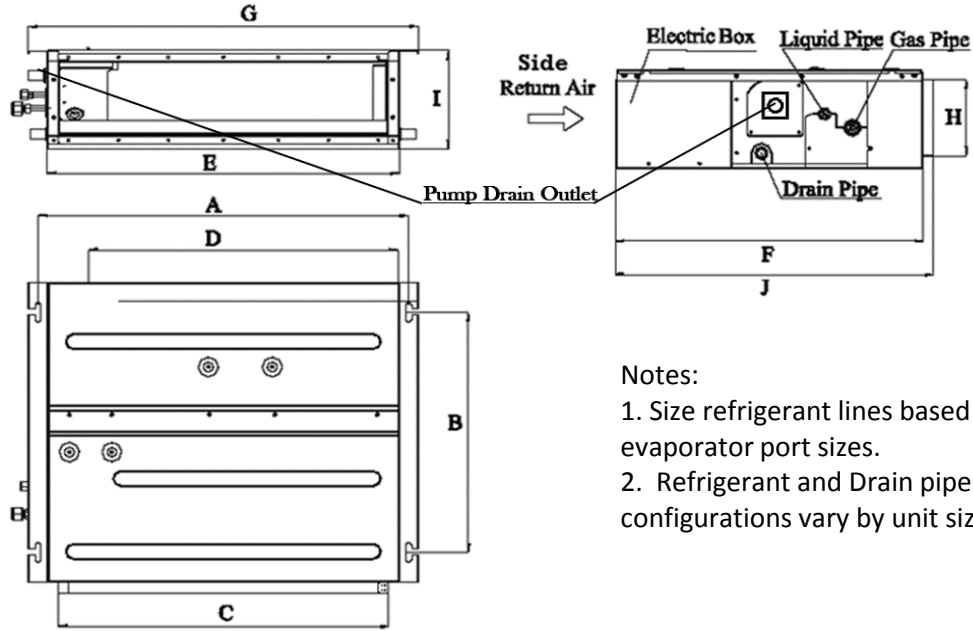

Notes:

1. Size refrigerant lines based on evaporator port sizes.
2. Refrigerant and Drain pipe configurations vary by unit size.


Dimensions

	A	B	C	D	E	F	G	H	I	J
(mm)	1124	491	1062	1020	1100	615	1182	156	200	635
(inches)	44.3	19.3	41.8	40.2	43.3	24.2	46.5	6.1	7.9	25.0

Weight (Net/Gross) 68/90 lbs

INDOOR FAN PERFORMANCE DATA

WG = inches of water guage

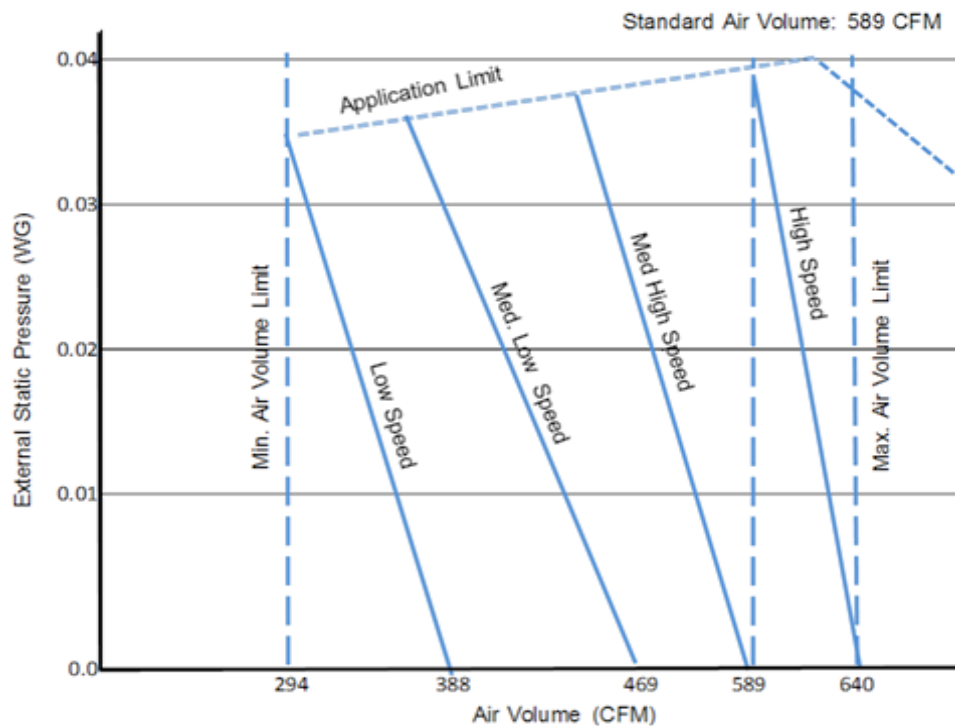

Notes:

1. Recommended Interconnecting Cable Type Stranded Bare Copper Conductors THHN 600V Unshielded Wire
2. Power wiring cable size must comply with applicable national and local codes.
3. Test conditions are based on AHRI 210/240.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.