



<b>Submittal Data: TERRA24HP230V1B</b>		24,000 BTU/H Wall Mounted Heat- Pump System																																												
Job Name		Location																																												
Purchaser		Date																																												
Submitted To		Engineer																																												
Unit Designation		Schedule No.																																												
<b>GENERAL FEATURES</b> <ul style="list-style-type: none"> <li>- Ultra High Efficiency</li> <li>- 7 Indoor Fan Speeds</li> <li>- 4 Way Airflow Operation</li> <li>- Photocatalytic Filter</li> <li>- Wireless Remote with LCD Display</li> <li>- Acrylic Resin/Anti-Corrosion Coil Protection Inside &amp; Out</li> <li>- 5 year Limited Parts Warranty</li> <li>- 7 year Limited Compressor Warranty</li> </ul> 		 <p>AHRI Certified Ref No: 7606718</p>																																												
System Ratings		Indoor Unit Data																																												
<b>Cooling</b> <table border="0"> <tr> <td>Rated Capacity</td> <td>24,000 BTU/H</td> </tr> <tr> <td>Capacity Range</td> <td>6,824-29,343 BTU/H</td> </tr> <tr> <td>Power Input (Max)</td> <td>2,900 W</td> </tr> <tr> <td>SEER</td> <td>21</td> </tr> <tr> <td>EER</td> <td>12.5</td> </tr> </table>		Rated Capacity	24,000 BTU/H	Capacity Range	6,824-29,343 BTU/H	Power Input (Max)	2,900 W	SEER	21	EER	12.5	<table border="0"> <tr> <td><b>Fan Motor</b></td> <td>Output Power</td> <td>70 W</td> </tr> <tr> <td></td> <td>FLA</td> <td>0.4 A</td> </tr> <tr> <td><b>Airflow</b></td> <td></td> <td></td> </tr> <tr> <td>Cooling Wet (Lo/Hi)</td> <td></td> <td>294/647 CFM</td> </tr> <tr> <td>Heating Dry (Lo/Hi)</td> <td></td> <td>294/647 CFM</td> </tr> <tr> <td><b>Sound Pressure Level</b></td> <td></td> <td></td> </tr> <tr> <td>Cooling (Lo/Hi)</td> <td></td> <td>38/52 db(A)</td> </tr> <tr> <td>Heating (Lo/Hi)</td> <td></td> <td>38/52 db(A)</td> </tr> <tr> <td><b>Dimensions &amp; Weights</b></td> <td></td> <td></td> </tr> <tr> <td>Unit Dimensions (LxHxD)</td> <td></td> <td>46.4 x 12.8 x 10.4-in</td> </tr> <tr> <td>Weight (Net/Shipping)</td> <td></td> <td>39/47 LBS</td> </tr> </table>		<b>Fan Motor</b>	Output Power	70 W		FLA	0.4 A	<b>Airflow</b>			Cooling Wet (Lo/Hi)		294/647 CFM	Heating Dry (Lo/Hi)		294/647 CFM	<b>Sound Pressure Level</b>			Cooling (Lo/Hi)		38/52 db(A)	Heating (Lo/Hi)		38/52 db(A)	<b>Dimensions &amp; Weights</b>			Unit Dimensions (LxHxD)		46.4 x 12.8 x 10.4-in	Weight (Net/Shipping)		39/47 LBS
Rated Capacity	24,000 BTU/H																																													
Capacity Range	6,824-29,343 BTU/H																																													
Power Input (Max)	2,900 W																																													
SEER	21																																													
EER	12.5																																													
<b>Fan Motor</b>	Output Power	70 W																																												
	FLA	0.4 A																																												
<b>Airflow</b>																																														
Cooling Wet (Lo/Hi)		294/647 CFM																																												
Heating Dry (Lo/Hi)		294/647 CFM																																												
<b>Sound Pressure Level</b>																																														
Cooling (Lo/Hi)		38/52 db(A)																																												
Heating (Lo/Hi)		38/52 db(A)																																												
<b>Dimensions &amp; Weights</b>																																														
Unit Dimensions (LxHxD)		46.4 x 12.8 x 10.4-in																																												
Weight (Net/Shipping)		39/47 LBS																																												
<b>Heating at 47° F</b> <table border="0"> <tr> <td>Rated Capacity</td> <td>25,000 BTU/H</td> </tr> <tr> <td>Capacity Range</td> <td>7,506-37,532 BTU/H</td> </tr> <tr> <td>Power Input (Max)</td> <td>3,500 W</td> </tr> <tr> <td>HSPF</td> <td>10.0</td> </tr> <tr> <td>COP</td> <td>3.2</td> </tr> </table>		Rated Capacity	25,000 BTU/H	Capacity Range	7,506-37,532 BTU/H	Power Input (Max)	3,500 W	HSPF	10.0	COP	3.2	<b>Outdoor Unit Data</b> <table border="0"> <tr> <td><b>Compressor</b></td> <td>DC Inverter Driven Rotary</td> </tr> <tr> <td><b>Refrigerant Type</b></td> <td>R410A</td> </tr> <tr> <td><b>Fan Motor</b></td> <td>Output Power</td> <td>90 W</td> </tr> <tr> <td></td> <td>FLA</td> <td>0.6 A</td> </tr> <tr> <td><b>Sound Pressure</b></td> <td></td> <td></td> </tr> <tr> <td>Cooling (Lo/Hi)</td> <td></td> <td>59/69 db(A)</td> </tr> <tr> <td>Heating (Lo/Hi)</td> <td></td> <td>59/69 db(A)</td> </tr> <tr> <td><b>Dimensions &amp; Weights</b></td> <td></td> <td></td> </tr> <tr> <td>Unit Dimensions (LxHxD)</td> <td></td> <td>38.6 x 31.1 x 16.8 -in</td> </tr> <tr> <td>Weight (Net/Shipping)</td> <td></td> <td>154/165 LBS</td> </tr> </table>		<b>Compressor</b>	DC Inverter Driven Rotary	<b>Refrigerant Type</b>	R410A	<b>Fan Motor</b>	Output Power	90 W		FLA	0.6 A	<b>Sound Pressure</b>			Cooling (Lo/Hi)		59/69 db(A)	Heating (Lo/Hi)		59/69 db(A)	<b>Dimensions &amp; Weights</b>			Unit Dimensions (LxHxD)		38.6 x 31.1 x 16.8 -in	Weight (Net/Shipping)		154/165 LBS					
Rated Capacity	25,000 BTU/H																																													
Capacity Range	7,506-37,532 BTU/H																																													
Power Input (Max)	3,500 W																																													
HSPF	10.0																																													
COP	3.2																																													
<b>Compressor</b>	DC Inverter Driven Rotary																																													
<b>Refrigerant Type</b>	R410A																																													
<b>Fan Motor</b>	Output Power	90 W																																												
	FLA	0.6 A																																												
<b>Sound Pressure</b>																																														
Cooling (Lo/Hi)		59/69 db(A)																																												
Heating (Lo/Hi)		59/69 db(A)																																												
<b>Dimensions &amp; Weights</b>																																														
Unit Dimensions (LxHxD)		38.6 x 31.1 x 16.8 -in																																												
Weight (Net/Shipping)		154/165 LBS																																												
<b>Heating at 17° F</b> <table border="0"> <tr> <td>Rated Capacity</td> <td>15,300</td> </tr> <tr> <td>Capacity (Max)</td> <td>20,444 BTU/H</td> </tr> <tr> <td>Power Input (Max)</td> <td>3,271 W</td> </tr> <tr> <td>COP</td> <td>2.5</td> </tr> </table>		Rated Capacity	15,300	Capacity (Max)	20,444 BTU/H	Power Input (Max)	3,271 W	COP	2.5	<b>Refrigerant Piping Data</b> <table border="0"> <tr> <td>Gas Pipe Size (OD)</td> <td>5/8-in</td> </tr> <tr> <td>Liquid Pipe Size (OD)</td> <td>1/4-in</td> </tr> <tr> <td>Connection Method</td> <td>Flared</td> </tr> <tr> <td>MAX Refrigerant Pipe Length</td> <td>98-ft</td> </tr> <tr> <td>MIN Refrigerant Pipe Length</td> <td>10-ft</td> </tr> <tr> <td>MAX Refrigerant Pipe Height Difference</td> <td>33-ft</td> </tr> </table>		Gas Pipe Size (OD)	5/8-in	Liquid Pipe Size (OD)	1/4-in	Connection Method	Flared	MAX Refrigerant Pipe Length	98-ft	MIN Refrigerant Pipe Length	10-ft	MAX Refrigerant Pipe Height Difference	33-ft																							
Rated Capacity	15,300																																													
Capacity (Max)	20,444 BTU/H																																													
Power Input (Max)	3,271 W																																													
COP	2.5																																													
Gas Pipe Size (OD)	5/8-in																																													
Liquid Pipe Size (OD)	1/4-in																																													
Connection Method	Flared																																													
MAX Refrigerant Pipe Length	98-ft																																													
MIN Refrigerant Pipe Length	10-ft																																													
MAX Refrigerant Pipe Height Difference	33-ft																																													
<b>Operating Range</b> <table border="0"> <tr> <td>Cooling</td> <td>(Max)</td> <td>118°F (43 C)</td> </tr> <tr> <td></td> <td>(Min)</td> <td>5°F (115 C)</td> </tr> <tr> <td>Heating</td> <td>(Max)</td> <td>75°F (24 C)</td> </tr> <tr> <td></td> <td>(Min)</td> <td>5°F (-15 C)</td> </tr> </table>		Cooling	(Max)	118°F (43 C)		(Min)	5°F (115 C)	Heating	(Max)	75°F (24 C)		(Min)	5°F (-15 C)																																	
Cooling	(Max)	118°F (43 C)																																												
	(Min)	5°F (115 C)																																												
Heating	(Max)	75°F (24 C)																																												
	(Min)	5°F (-15 C)																																												
<b>Power Supply</b> <table border="0"> <tr> <td>Normal Operational Voltage</td> <td>208/230 V, 1 Phase, 60 Hz</td> </tr> <tr> <td>Voltage Range</td> <td>187 - 253 V</td> </tr> <tr> <td>Main Power Wire Size</td> <td>10-2 AWG</td> </tr> <tr> <td>Interconnecting Cable Wire Size</td> <td>14-4 AWG</td> </tr> <tr> <td>MCA</td> <td>20 A</td> </tr> <tr> <td>MOCP/Breaker Size</td> <td>30 A</td> </tr> </table>		Normal Operational Voltage	208/230 V, 1 Phase, 60 Hz	Voltage Range	187 - 253 V	Main Power Wire Size	10-2 AWG	Interconnecting Cable Wire Size	14-4 AWG	MCA	20 A	MOCP/Breaker Size	30 A																																	
Normal Operational Voltage	208/230 V, 1 Phase, 60 Hz																																													
Voltage Range	187 - 253 V																																													
Main Power Wire Size	10-2 AWG																																													
Interconnecting Cable Wire Size	14-4 AWG																																													
MCA	20 A																																													
MOCP/Breaker Size	30 A																																													



**EXTENDED RATINGS**

**COOLING PERFORMANCE**

Outdoor Ambient Temperature (DB)	Indoor Entering Air Temperatures (DB) 50% RH					
	62 F		67 F		72 F	
	TC	SHC	TC	SHC	TC	SHC
25 F	NA	NA	NA	NA	NA	NA
35 F	NA	NA	NA	NA	NA	NA
45 F	NA	NA	NA	NA	NA	NA
55 F	27,574	21,342	29,341	22,006	31,454	22,962
65 F	26,347	20,472	28,927	21,956	30,673	22,422
75 F	25,051	19,590	26,931	20,710	29,235	21,575
85 F	23,795	18,893	25,440	19,639	27,875	20,823
95 F	22,368	17,872	24,000	19,176	26,496	19,898
105 F	21,210	17,223	22,795	18,191	25,000	19,200
115 F	20,067	16,535	21,231	17,197	22,891	17,924

**HEATING PERFORMANCE**

Outdoor Ambient Temperature (DB) (80% RH)	Indoor Entering Air Temperatures (DB)					
	65 F		70 F		75 F	
	TC	SHC	TC	SHC	TC	SHC
5 F	20,537	20,537	19,383	19,383	18,908	18,908
15 F	21,953	21,953	20,028	20,028	19,907	19,907
25 F	23,292	23,292	22,108	22,108	20,850	20,850
35 F	24,593	24,593	22,763	22,763	21,808	21,808
45 F	25,878	25,878	25,000	25,000	23,485	23,485
55 F	25,912	25,912	25,163	25,163	24,062	24,062
65 F	25,790	25,790	25,413	25,413	24,630	24,630



TC- Total Capacity ( BtuH)

SHC- Sensible Capacity (BtuH)



MINIMUM SPACING REQUIREMENTS

Units: inch (mm)

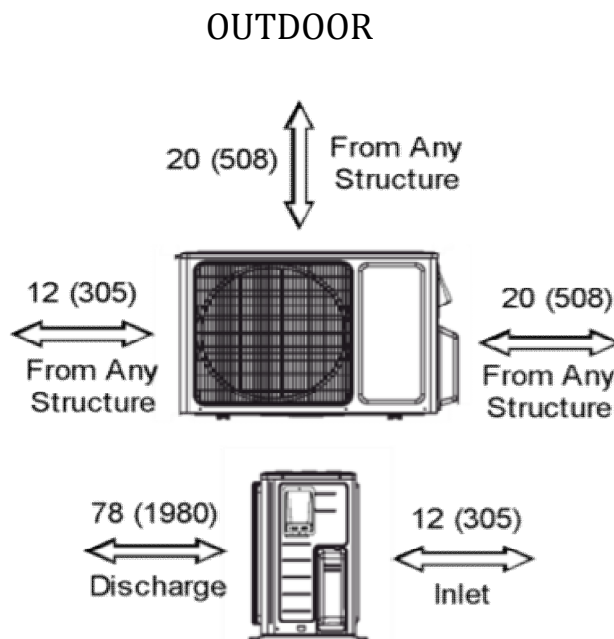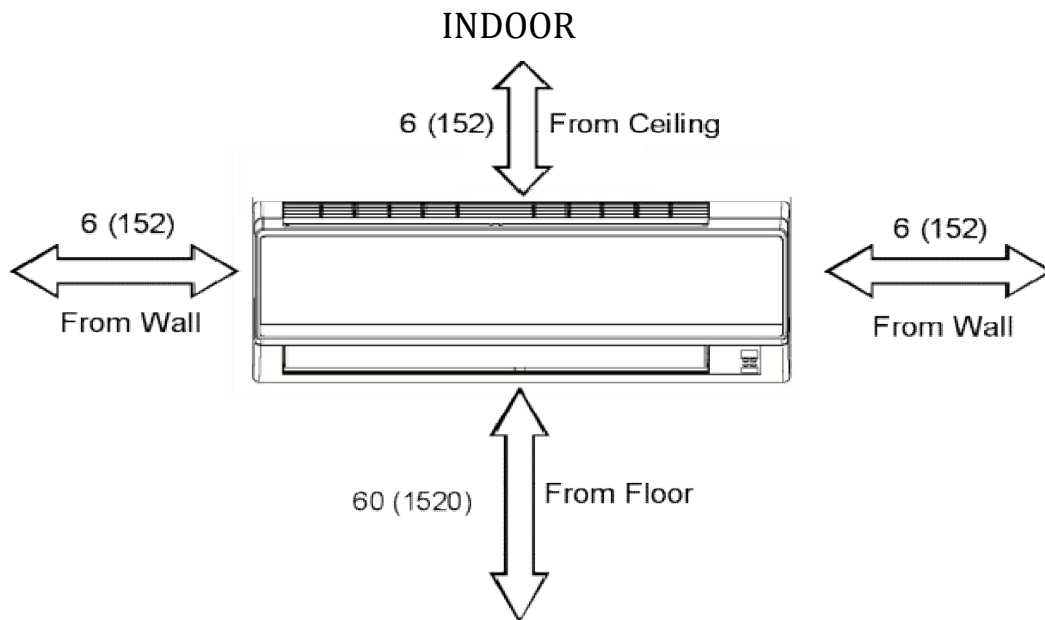


## DIMENSIONAL SPECIFICATIONS

## TERRA24HP230V1B

### INDOOR UNIT DIMENSIONS



Units: inch (mm)

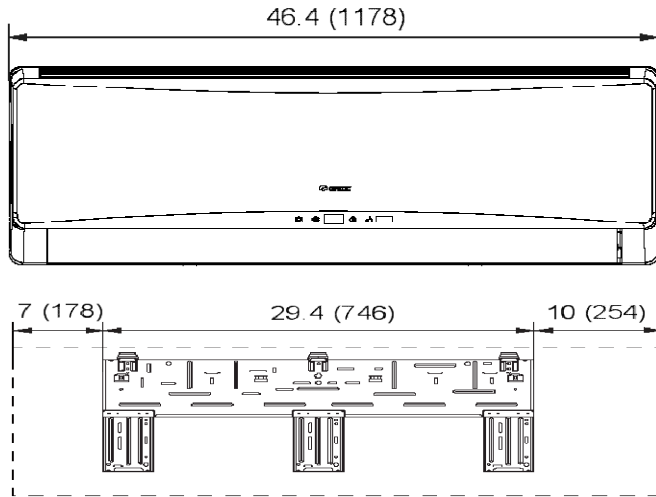

Liquid Line Valve	1/4-in OD Flared
Gas Line Valve	5/8-in OD Flared
Drain Connector	5/8-in OD

### OUTDOOR UNIT DIMENSIONS

Units: inch (mm)

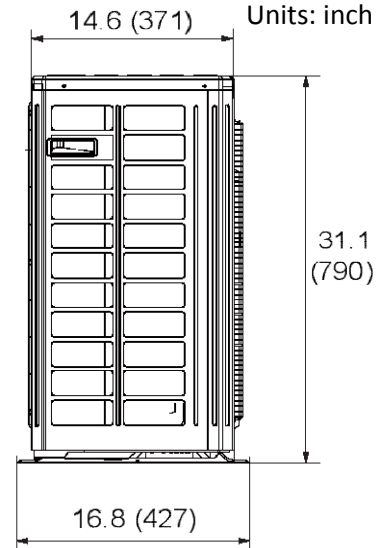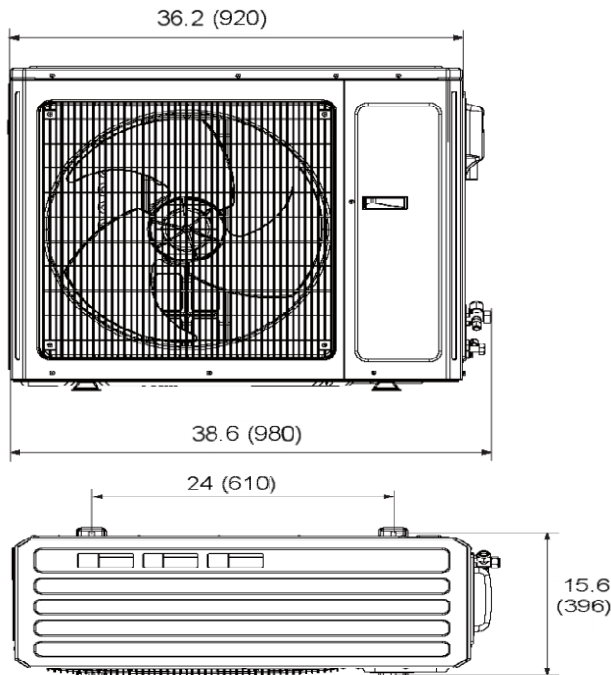

Liquid Line Valve	1/4-in OD Flared
Gas Line Valve	5/8-in OD Flared

**Notes:**

1. Recommended Interconnecting Cable Type Stranded Bare Copper Conductors THHN 600V Wire
2. Power wiring cable size must comply with applicable national and local codes.
3. Test conditions are based on AHRI 210/240.



[www.greecomfort.com](http://www.greecomfort.com)

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.