


## LeakSmart Leak Sensor

For all LeakSmart Leak Detection Systems

### Instructions:

1. Plug one end of the wire that was provided to the prongs on the end of the existing LeakSmart Water Leak Sensor, pushing until plug snaps in place.
2. Plug the other end of the wire provided to either set of prongs on the new LeakSmart Water Leak Sensor, pushing until plug snaps in place.
3. Place Water Leak Sensor where needed.

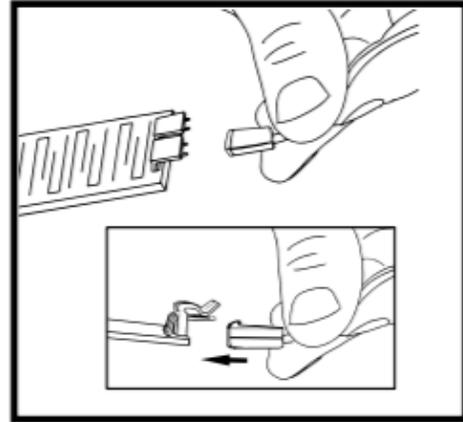

**Note:** The Water Leak Sensor comes with a paper sleeve. The paper sleeve acts as a barrier between the Leak Sensor and metal. If the Leak Sensor makes contact with metal, it will signal the LeakSmart Valve to shut-off. When the paper sleeve becomes wet, it will signal the LeakSmart Valve to shut-off. Make sure the paper sleeve is completely dry when using it with the Leak Sensor. If the Leak Sensor will not be contacting metal, you may remove the paper sleeve.

**Caution:** Do not place the Leak Sensor or cord in a walk way or other location that may cause someone to trip and fall.

### **⚠**WARNING

This product may contain lead, a chemical known to the state of California to cause birth defects or other reproductive harm.

For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



For installation help or product questions, call toll free:

1-855-532-5768



Waxman Consumer Products Group,  
Cleveland, Ohio 44146

©2017 All rights reserved.

[www.waxmancpg.com](http://www.waxmancpg.com)

Made in China.

Designed in the U.S.A.

LeakSmart by Waxman™ is a trademark of Waxman Consumer Product Group

Model# 8820700