


Job Name: _____

System Reference: _____ Date: _____



Indoor Unit: PEAD-A24AA5



Outdoor Unit: PUZ-A24NHA6 (-BS)

UNIT OPTION:

- Standard Model.....PUZ-A24NHA6
- Seacoast (BS) Model.....PUZ-A24NHA6-BS

ACCESSORIES:

Indoor Unit

- Condensate Pump (BlueDiamond X87-711/721; 115/230V)
- Condensate Pump (Sauermann SI30-115/230; 115/230V)
- Filter Box & MERV 13 Filter (FBM2-3)
- Disconnect Switch (TAZ-MS303)

Outdoor Unit

- Wind Baffle (WB-PA2)*
- *Allows operation to 0° F (-18° C).
- Air Outlet Guide (PAC-SG59SG-E)
- Mounting Base (QSMS1201)
- Wall Bracket (QSWB2000M-1)

Controls

- Wireless Controller (MHK1)
- Advanced Wired Controller (PAR-31MAA)
- Simple Wired Controller (PAC-YT53CRAU)
- M-NET Adapter (PAC-SF83MA-E)
- Temperature Sensor (PAC-SE41TS)

SPECIFICATIONS:

Rated Conditions (Capacity / Input)*		
Cooling	Btu/h / W	24,000 / 2,400
Heating at 47° F	Btu/h / W	26,000 / 2,250
Heating at 17° F	Btu/h / W	18,000 / 2,130

* Rating Conditions per AHRI Standard:
 Cooling | Indoor: 80° F (27° C)DB / 67° F (19° C)WB; Outdoor: 95° F (35° C)DB / 75° F (24° C)WB
 Heating at 47° F | Indoor: 70° F (21° C)DB / 60° F (16° C)WB; Outdoor: 47° F (8° C)DB / 43° F (6° C)WB
 Heating at 17° F | Indoor: 70° F (21° C)DB / 60° F (16° C)WB; Outdoor: 17° F (-8° C)DB / 15° F (-9° C)WB

Capacity Range		
Cooling	Btu/h	12,000 - 24,000
Heating at 47° F	Btu/h	12,000 - 28,000

Operating Range	
Cooling	0° F** to 115° F (-18° C to 46° C) DB
Heating	12° F to 70° F (-11° C to 21° C) DB

** The minimum temperature will be 23° F (-5° C) DB if optional wind baffle accessory is not installed.

AHRI Efficiency Ratings	
EER	10.0
SEER	16.0
HSPF	10.2
COP at 47° F	3.38
COP at 17° F	2.47

Electrical Power Requirements	208 / 230V, 1-Phase, 60 Hz
-------------------------------	----------------------------

Minimum Circuit Ampacity (MCA)		
Indoor / Outdoor	A	2.63 / 18

Indoor Unit		
Blower Motor (ECM)	F.L.A.	2.1
Blower Motor Output	W	121
SHF / Moisture Removal		0.68 / 6.9 pt./h
External Static Pressure	In. WG	0.14-0.20-0.28-0.40-0.60
Drain Lift Mechanism (Included)	H: In.	27-9/16

Outdoor Unit		
Compressor		DC INVERTER-driven Twin Rotary
Fan Motor (ECM)	F.L.A.	0.75
MOCP	A	30

Airflow Rate (Low-Mid-Hi)			
Indoor (Cooling)	DRY	CFM	512-636-742
	WET		494-600-671
Outdoor	DRY		1,940

Sound Pressure Level			
Indoor (Low-Mid-Hi)			30-33-37
Outdoor	Cooling	dB(A)	48
	Heating		50

External Dimensions		
Indoor (H x W x D)	In.(mm)	9-7/8 x 43-5/16 x 28-7/8 (250 x 1,100 x 732)
Outdoor (H x W x D)		37-1/8 x 37-3/8 x 13 + 1-3/16 (943 x 950 x 330 + 30)

Net Weight		
Indoor	Lbs.(kg)	73 (33)
Outdoor		165 (75)


External Finish	
Indoor	Galvanized-steel Sheet
Outdoor	Munsell No. 3Y 7.8 / 1.1

Refrigerant	R410A ; 6lbs., 10oz.
-------------	----------------------

Refrigerant Piping (Flared)		
Liquid (High Pressure)	In.(mm)	3/8 (9.52)
Gas (Low Pressure)		5/8 (15.88)
Maximum Total Refrigerant Pipe Length	Ft. (m)	165 (50)
Maximum Vertical Separation	Ft. (m)	100 (30)

DIMENSIONS: PEAD-A24AA5 & PUZ-A24NHA6 (-BS)


PEAD-A24AA5

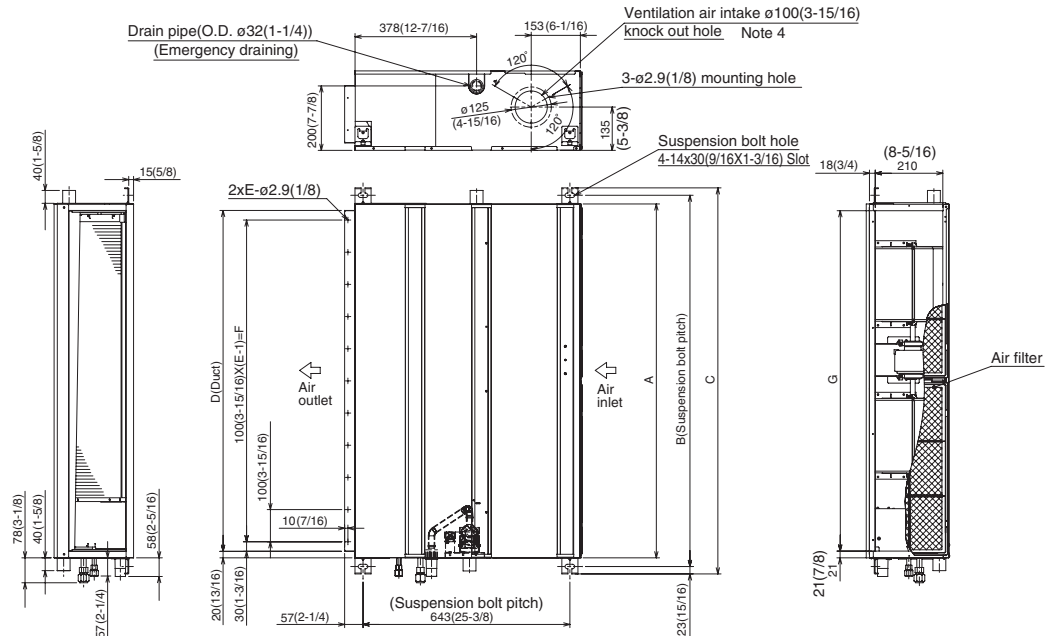

Model	A	B	C	D	E	F	G	H	J	K	L	M	N	① Gas pipe	② Liquid pipe
PEAD-A24, 30AA4	1100 (43-5/16)	1154 (45-7/16)	1200 (47-1/4)	1060 (41-3/4)	11	1000 (39-3/8)	1058 (41-11/16)	1200 (47-1/4)	49 (1-15/16)	330 (13)	4	990 (39)	10	ø15.88 (5/8)	ø9.52 (3/8)
PEAD-A36, 42AA4	1400 (55-1/8)	1454 (57-1/4)	1500 (59-1/16)	1360 (53-9/16)	14	1300 (51-3/16)	1358 (53-1/2)	1500 (59-1/16)	54 (2-3/16)	320 (12-5/8)	5	1280 (50-7/16)	12		


- NOTE 1. Use M10 screw for the Suspension bolt (field supply).
 2. Keep the service space for the maintenance at the bottom.
 3. This chart indicates for PEAD-A24-30-36-42AA4 models, which have 2 fans.
 4. In case of the inlet duct is used, remove the air filter (supplied with the unit), then install a filter (field supplied) at suction side.

PUZ-A24NHA6 (-BS)

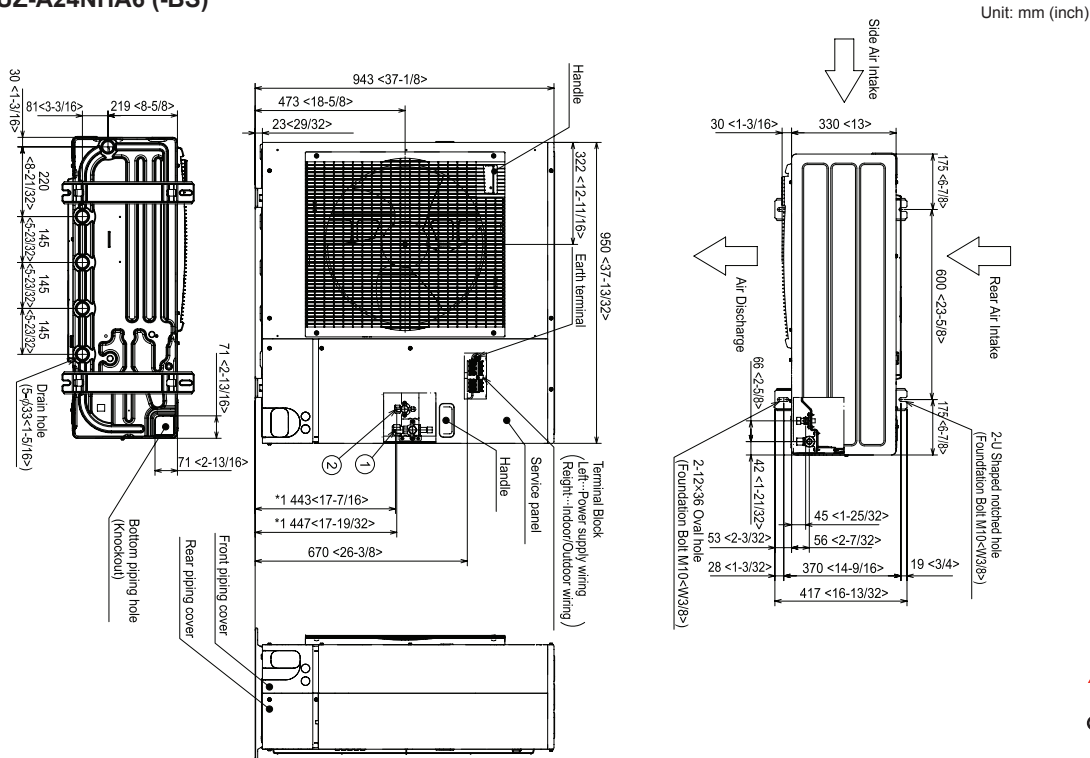

- NOTES:
 SEACOAST PROTECTION
- External Outer Panel: Phosphate coating + Acrylic-Enamel coating
 - Fan Motor Support: Epoxy resin coating (at edge face)
 - Separator Assembly ; Valve Bed: Epoxy resin coating (at edge face)
 - Screws (used outer side): Zinc nickel coating 5µm + Polyvinylidene chloride coating

“Blue Fin” treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants..

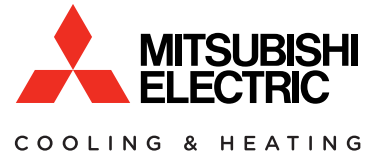

1340 Satellite Boulevard, Suwanee, GA 30024
 Toll Free: 800-433-4822 www.mehvac.com

