

# QSWB2000M-1

## Condenser Wall Bracket



Job Name:

System Reference:

Date:



### GENERAL FEATURES

- Designed to provide a means to mount the M-Series and P-Series outdoor units on a suitable wall or structure and keep the equipment off the ground in adverse environments like seacoast salt air or waterworks applications.
- Holds up to 500 Lbs.
- Adjustable from 0" to 34" in width.
- Produced from 316 Series Stainless Steel.
- Shelf depth is 25" to allow correct spacing between the wall and the outdoor unit.

### PLEASE NOTE

- It is the responsibility of the Project Engineer and/or the Installing Contractor / Dealer to specify, furnish, and install any anchor or attachment materials required for the wall construction at the selected mounting location. We are not responsible for any installation faults or defects.
- It is strongly recommended to have the installation periodically inspected by a skilled technician.
- All mounting hardware should be Stainless Steel or other corrosion resistant material.

### ASSEMBLY INSTRUCTION

- Remove the three wall mounted bracket parts and bag hardware from the box.
- Mount the straight QSWB2000M-1 glide track to the wall the proper bolts and fasteners for the wall type and construction.
- Install the spring nuts into the ends of the QSWB2000M-1 glide track and slide them to the desired location.
- Mount the L-bars to the glide track by using the hardware provided. (Note: Insert the 1" 3/4x3/8 bolts and washers thru the L-bar into the spring nuts.

### PLEASE NOTE

- It is the responsibility of the Project Engineer and/or the Installing Contractor / Dealer to specify, furnish, and install any anchor or attachment materials required for the wall construction at the selected mounting location. We are not responsible for any installation faults or defects.
- It is strongly recommended to have the installation periodically inspected by a skilled technician.
- All mounting hardware should be Stainless Steel or other corrosion resistant material.

### ASSEMBLY INSTRUCTION


- Remove the three wall mounted bracket parts and bag hardware from the box.
- Mount the straight QSWB2000M-1 glide track to the wall the proper bolts and fasteners for the wall type and construction.
- Install the spring nuts into the ends of the QSWB2000M-1 glide track and slide them to the desired location.
- Mount the L-bars to the glide track by using the hardware provided. (Note: Insert the 1" 3/4x3/8 bolts and washers thru the L-bar into the spring nuts.

### COMPATIBILITY


Single Zone	Single Zone
MUFZ-KJ09NAHZ	PUY-A12NKA7(-BS)
MUFZ-KJ12NAHZ	PUY-A18NKA7(-BS)
MUFZ-KJ15NAHZ	PUY-A24NHA7(-BS)
MUFZ-KJ18NAHZ	PUY-A30NHA7(-BS)
MUY-GL09NA	PUY-A36NKA7(-BS)
MUY-GL12NA	PUY-A42NKA7(-BS)
MUY-GL15NA	PUZ-A12NKA7(-BS)
MUY-GL18NA	PUZ-A18NKA7(-BS)
MUY-GL24NA	PUZ-A24NHA7(-BS)
MUY-GS30NA	PUZ-HA24NHA1
MUY-GS36NA	PUZ-A30NHA7(-BS)
MUZ-FS06NA	PUZ-HA30NKA
MUZ-FS06NAH	PUZ-A36NKA7(-BS)
MUZ-JP09WA	PUZ-HA36NKA
MUZ-GL09NA	PUZ-A42NKA7(-BS)
MUZ-WR09NA-U2	PUZ-HA42NKA1
MUZ-HM09NA	SUZ-KA09NAHZ
MUZ-FS09NA	SUZ-KA09NA2
MUZ-FS09NAH	SUZ-KA12NAHZ
MUZ-GL12NA	SUZ-KA12NA2
MUZ-JP12WA	SUZ-KA15NAHZ
MUZ-WR12NA-U2	SUZ-KA15NA2
MUZ-HM12NA	SUZ-KA18NAHZ
MUZ-FS12NAH	SUZ-KA18NA2
MUZ-FS12NA	SUZ-KA24NA2
MUZ-GL15NA	SUZ-KA30NA2
MUZ-HM15NA	SUZ-KA36NA2
MUZ-FS15NA	Multi Zone
MUZ-FS15NAH	MXZ-5C42NA3
MUZ-GL18NA	MXZ-4C36NA3
MUZ-WR18NA-U2	MXZ-3C30NA3
MUZ-FS18NA	MXZ-3C30NAHZ3
MUZ-FS18NAH	MXZ-3C24NA3
MUZ-GL24NA	MXZ-3C24NAHZ3
MUZ-HM24NA	MXZ-2C20NA3
MUZ-GS30NA	MXZ-2C20NAHZ3
MUZ-GS36NA	MXZ-SM36NAMHZ
	MXZ-SM36NAM
	MXZ-SM42NAMHZ
	MXZ-SM48NAM
	MXZ-SM48NAMHZ
	MXZ-SM60NAM

# DIMENSIONS; PARTS AND ASSEMBLY: QSWB2000M-1


## DIMENSIONS:

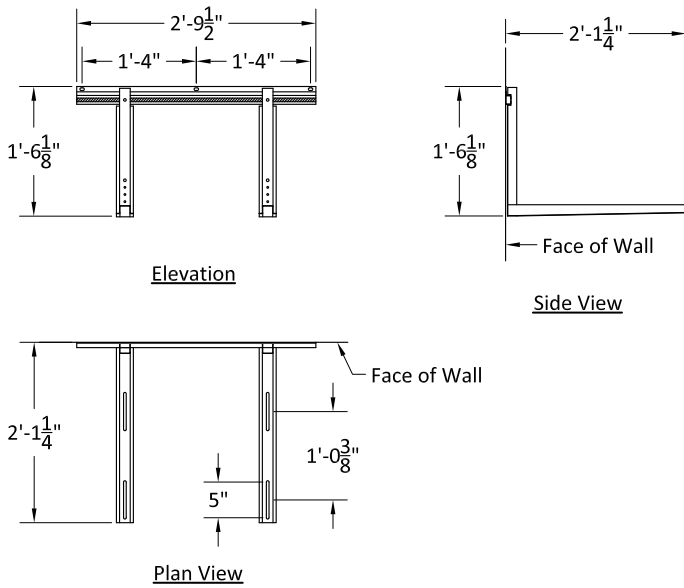

## PARTS AND ASSEMBLY:

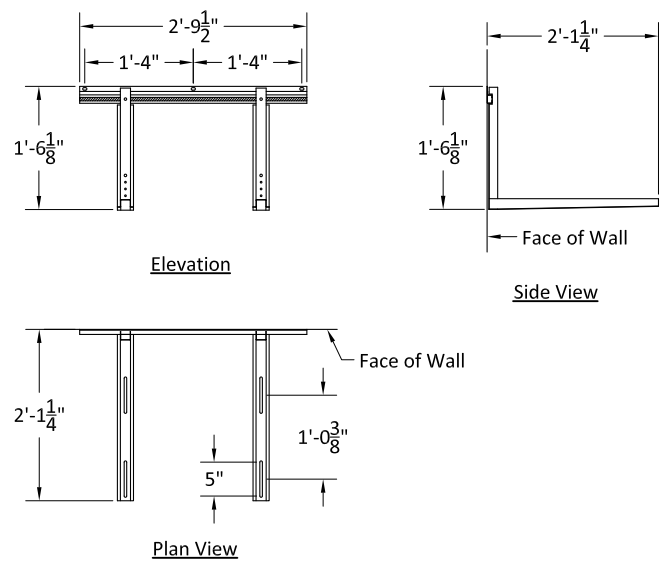


## PARTS:



## PARTS LIST

- (A) (1) - 14 gauge Glide Track
- (B) (2) - 14 gauge L-Bar



## PARTS LIST

- (A) (1) - 14 gauge Glide Track
- (B) (2) - 14 gauge L-Bar

Note - All assembly hardware is included

Note - All assembly hardware is included

1340 Satellite Boulevard Suwanee, GA 30024  
 Toll Free: 800-433-4822 | www.mehvac.com