

Data

Vendor	White-Rodgers
W.R. Part No.	36C94-907
Type	Redundant - Cycle Pilot
Voltage	24 VAC
Frequency	60Hz
Current	.6 A
Ambient Temp	-40°F to 175°F
Pipe Size [NPT] vs Capacity LP	@ 1" W.C. Pressure Drop
1/2" x 3/8"	162,000 BTUH
1/2" x 1/2"	372,600 BTUH
1/2" x 3/4"	372,600 BTUH
3/4" x 3/4"	453,600 BTUH
Pipe Size [NPT] vs Capacity NG	@ 1" W.C. Pressure Drop
1/2" x 3/8"	100,000 BTUH
1/2" x 1/2"	230,000 BTUH
1/2" x 3/4"	230,000 BTUH
3/4" x 3/4"	280,000 BTUH
Pressures	
Maximum Inlet Pressure	14" W.C. or 1/2 PSI Max.
Regulator Adjustment Range	2.5 to 5" W.C.
Setting	3 1/2" +/- .3" W.C.
Terminations	Harness [5 cond.]
CSA File	165039-1113449

REV	NOTES	DATE

Notes:

- Items included with gas control:


[3] NPT adapter bushings
Installation instructions

KIT {

- LP Conversion instructions
- LP Conversion warning label [1]
- LP Label [1]
- Spring [1]

Lighting instruction label [self adhesive]

- Per White Rodgers, 607012 is identical to 60-20714-98 except for electric on/off switch
- Available separately at multiple lengths:
Harness Assembly

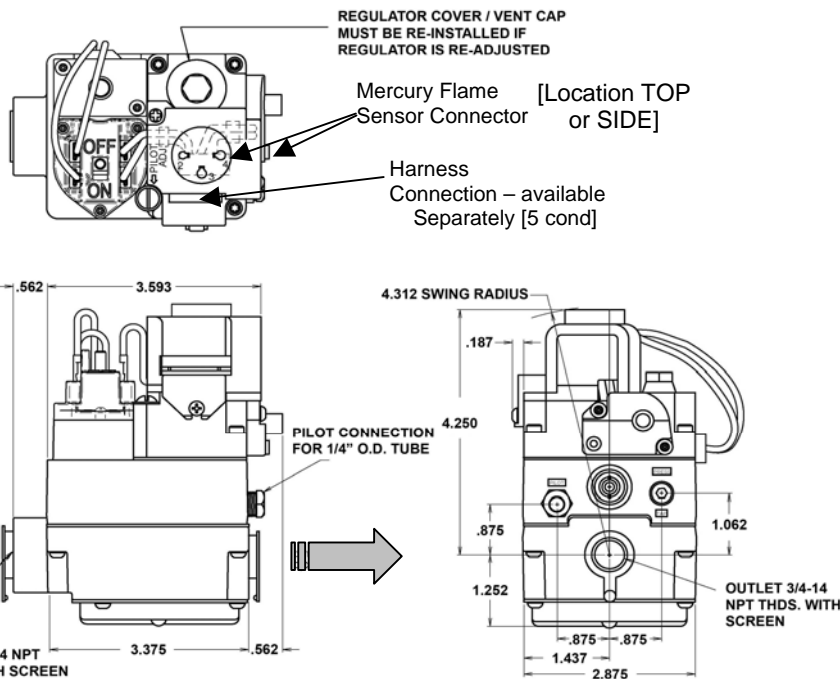

Part No. [s]

Drawn By: DGR 2/6/07

Reviewed By: WCM 2/6/07
Date:

NO REVISION TO DESIGN, MATERIAL, TOOLING OR PROCESS IS ACCEPTABLE WITHOUT PRIOR APPROVAL FROM RHEEM THROUGH A REVISED ENGINEERING SPECIFICATION AND A RESAMPLING OF PARTS. THE SUPPLIER IS RESPONSIBLE FOR NOTIFYING RHEEM PARTS DEPARTMENT AND PURCHASING DEPARTMENTS IN WRITING OF ANY CHANGES AFFECTING PRODUCT QUALITY, PERFORMANCE, RELIABILITY, PACKAGING, DELIVERY OR WORKMANSHIP. ANY DOCUMENTS REFERRED TO ON THIS DRAWING ARE INCLUDED IN THE SPECIFICATIONS FOR THIS COMPONENT.



Parts
Department

White-Rodgers
Universal Replacement Gas Control

607012