



SUBMITTAL COVER SHEET

PROJECT NAME _____

LOCATION _____

ARCHITECT _____

ENGINEER _____

CONTRACTOR _____

SUBMITTED BY _____ DATE _____

UNIT SUMMARY

Quantity						
Unit Designation						
Model No.						
Total Cooling						
Sensible Cooling						
Air Ent. Evaporator						
Air Lvg. Evaporator						
Heating Input						
Heating Output						
CFM/ESP						
EER/SEER						
Electrical						
Minimum Ampacity						
Min.-Max. Breaker						
Net Unit Weight						
Accessory						
Catalog Form Number						

ACCESSORIES:

NOTES:

SUBMITTAL SHEET FOR (-)ASL- JEZ 3 TON [10.5 kW], 18 SEER HIGH EFFICIENCY CONDENSING UNITS

R410A
earth friendly refrigerant

JOB NAME _____ LOCATION _____
 CONTRACTOR _____ ORDER NO. _____
 ENGINEER _____
 SUBMITTED FOR ☐ APPROVAL ☐ RECORD
 DATE _____
 UNIT MODEL NO. _____
 COIL MODEL NO. _____
 AIR HANDLER MODEL NO. _____

UNIT DATA

COOLING PERFORMANCE

EFFICIENCY SEER
 TOTAL CAPACITY* MBH [kW]
 SENSIBLE CAPACITY* MBH [kW]
 OUTDOOR DESIGN TEMP. °F [°C] DB
 TEMP. OF AIR ENTERING
 EVAPORATOR COIL °F [°C] DB
 °F [°C] WB
 POWER INPUT REQUIREMENT kW
 (*uses blower motor heat)

SUPPLY AIR BLOWER PERFORMANCE

TOTAL AIR SUPPLY CFM [L/s]
 TOTAL RESISTANCE EXTERNAL
 TO UNIT IWG
 BLOWER SPEED RPM
 POWER OUTPUT REQUIREMENT .. BHP
 MOTOR RATING HP [W]
 POWER INPUT REQUIREMENT kW

ELECTRICAL DATA


POWER SUPPLY / /
 TOTAL UNIT AMPACITY AMPS
 MINIMUM WIRE SIZE AWG
 MAXIMUM OVERCURRENT DEVICE
 FUSES/HACR BREAKER AMPS

CLEARANCES

ACCESS SIDE 24" [609.6 mm]
 AIR INLETS 12" [304.8 mm]
 ABOVE UNIT 60" [1524 mm]

Equipped with the Award Winning Comfort Control System™

- Increased Reliability
- Fault Recall
- On-Board Diagnostics
- Active Protection™

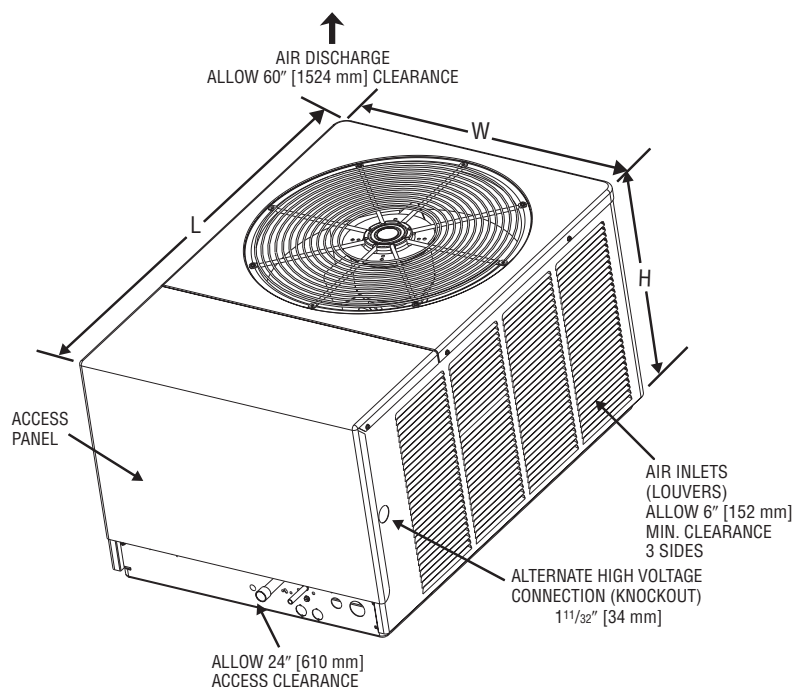

DIMENSIONS

Model Number (-)ASL-	Height "H" (Inches) [mm]	Length "L" (Inches) [mm]	Width "W" (Inches) [mm]
036JEZ	33 [838]	44 ³ / ₈ [1127]	31 ¹ / ₂ [800]

[] Designates Metric Conversions



FEATURES FOR (-)ASL- JEZ CONDENSING UNITS 3 NOMINAL TON [10.5 kW]

- High Efficiency
- The *Comfort Control System™* provides on-board diagnostics and fault history for condensing units with single-phase compressors by detecting system and electrical problems without adding sensors. It can also communicate “fault codes” to enabled “L terminal” thermostats. The integrated diagnostics with *Active Protection™* prevents compressor operation when damage would occur.
- Features an exclusive 7-Segment LED Display. The information-display quickly and accurately shows technicians the source of malfunctions.
- Reliable Copeland Two-Stage Scroll™ Compressor for precise temperature control providing ultimate comfort.
- All refrigerant connections are on the exterior of the unit, located close to the ground for neat appearing installations.
- Cabinet is constructed of powder painted galvanized steel. The full wrap-around louvered grille protects the coil from damage.
- Copper Tube—Aluminum Fin coils are used on all models.
- The control box is located in the top corner of the cabinet providing easy access through a service panel.
- Control Box Cover.
- Service valves are standard on all models.
- Power and control wiring are kept separate.
- Hard Start Kits standard on all models.
- Separate compressor compartment for easy service access.
- Enhanced Compressor sound-wrap is standard.
- Drawn, painted base pan for extra corrosion resistance and sound reduction.
- The 3 ton model features the GE® ECM two-speed motor with a 3-blade outdoor fan.
- Factory installed high and low pressure control.
- Certified and rated under ARI Standard 210.
- U.L. listed
- Factory Installed Compressor Time Delay Control.
- Factory run tested prior to shipment.
- Limited Parts Warranty:
Features a 10-year limited parts warranty*.
*This ten-year limited parts warranty is applicable only to single-phase products installed in residential applications.
- **(-)ASL- JEZ Conditional Replacement Warranty:**
will provide a replacement model (if an exact replacement is not available, an equivalent product will be provided) to the original purchaser if the compressor fails within 10 years. See product warranty card for additional information.

[] Designates Metric Conversions

FIELD INSTALLED ACCESSORIES

Low Ambient Control (Model No. RXAD-A07) ☐
 Compressor Crankcase Heater (Model No. 44-17402-44CCH) ☐
 Thermostat (See Specification Sheet for details) ☐

SPECIAL NOTES ON EQUIPMENT:

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

RHEEM
MANUFACTURING
COMPANY
5600 Old Greenwood Road, Fort Smith, Arkansas 72908

“In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.”