



The new degree of comfort.™

SUBMITTAL COVER SHEET

PROJECT NAME _____
LOCATION _____
ARCHITECT _____
ENGINEER _____
CONTRACTOR _____
SUBMITTED BY _____ DATE _____

UNIT SUMMARY

Quantity						
Unit Designation						
Model No.						
Total Cooling						
Sensible Cooling						
Air Ent. Evaporator						
Air Lvg. Evaporator						
Heating Input						
Heating Output						
CFM/ESP						
EER/SEER						
Electrical						
Minimum Ampacity						
Min.-Max. Breaker						
Net Unit Weight						
Accessory						
Catalog Form Number						

ACCESSORIES:

NOTES:



INTEGRATED HOME COMFORT

PRINTED IN U.S.A 01/12 QG FORM NO. M11-1640

SUBMITTAL SHEET FOR PACKAGE GAS ELECTRIC RGED SERIES, Nominal Sizes 7.5-12.5 Tons [26-44 kW]

JOB NAME _____

CONTRACTOR _____

ENGINEER _____

LOCATION _____

ORDER NO. _____

SUBMITTED FOR ☐ APPROVAL ☐ RECORD

SUBMITTED BY _____

DATE _____

UNIT DESIGNATION _____

MODEL NO. _____

UNIT DATA

COOLING PERFORMANCE

TOTAL CAPACITY* MBH
 SENSIBLE CAPACITY* MBH
 OUTDOOR DESIGN TEMP. .. °F [°C] DB/WB
 TOTAL SUPPLY AIR CFM [L/s]
 TEMP. OF AIR ENTERING
 EVAPORATOR COIL °F [°C] DB/WB
 POWER INPUT REQUIREMENT kW
 SEER/EER RATING
 (*uses blower motor heat)

HEATING PERFORMANCE

GAS HEAT INPUT CAPACITY MBH
 GAS HEAT OUTPUT CAPACITY MBH
 STEADY STATE EFFICIENCY

SUPPLY AIR BLOWER PERFORMANCE

TOTAL SUPPLY AIR CFM [L/s]
 TOTAL RESISTANCE EXTERNAL
 TO UNIT IWG
 BLOWER SPEED RPM
 POWER OUTPUT REQUIREMENT BHP
 MOTOR RATING HP [W]
 POWER INPUT REQUIREMENT kW

ELECTRICAL DATA

POWER SUPPLY Hz
 TOTAL UNIT AMPACITY AMPS
 MINIMUM WIRE SIZE AWG
 MAXIMUM OVERCURRENT DEVICE
 FUSES HACR BREAKER AMPS

TOTAL UNIT WEIGHT



TOTAL OPERATING WEIGHT LBS [kg]
 (including field-installed accessories)

CLEARANCES


FRONT 48" [1219 mm]
 CONDENSER COIL 18" [457 mm]
 DUCT SIDE 12" [305 mm]
 EVAPORATOR END 36" [914 mm]
 ABOVE UNIT 60" [1524 mm]

FEATURES FOR RGED SERIES PACKAGE GAS ELECTRIC UNITS


- Factory charged with R-410A HFC refrigerant
- Wired and run tested
- Scroll compressors with internal line break overload and high pressure protection
- Model RGEDZR has a single-stage compressor
- Models RGEDZS and RGEDZT have two-stage compressor
- Convertible airflow – vertical down flow or horizontal side flow
- Forkable base rails for easy handling and lifting
- Cooling operation up to 125°F ambient
- Two-stage gas heat input with direct spark ignition system, solid state furnace controls, and optimized induced draft combustion
- MicroChannel evaporator and condenser coil
- PlusOne® ServiceSmart package includes:
 Qwik-Change Flex-Fit Rack™
 Qwik-Slide Blower Assembly™
 Qwik-Clean Drain Pan™
- Over-flow condensate sensor
- PlusOne® Diagnostics with Dual 7-Segment LED Display to meet code compliance
- One-piece top cover and base pan with drawn supply and return opening
- Two-piece control door
- ¼ turn fasteners on filter access door
- Color-coded and labeled wiring
- External lockable gauge ports
- TXV refrigerant metering system
- Solid-core liquid line filter drier
- High pressure and low pressure/loss of charge protection with built-in Smart Logic
- Insulation encapsulated throughout entire unit
- High performance belt drive motor with variable pitch pulleys and quick adjust belt system
- Variable Frequency Drive (VFD) blower is standard on Model RGEDZT and optional on model RGEDZS
- New product footprint with matching connections
- Improved factory lead times

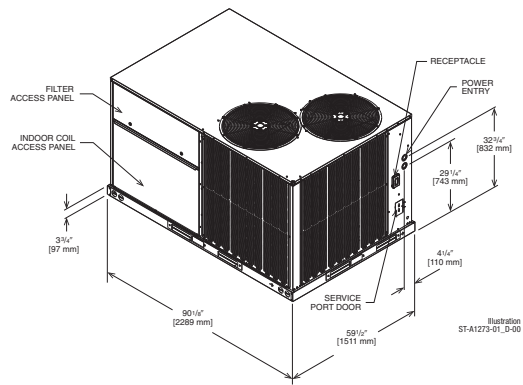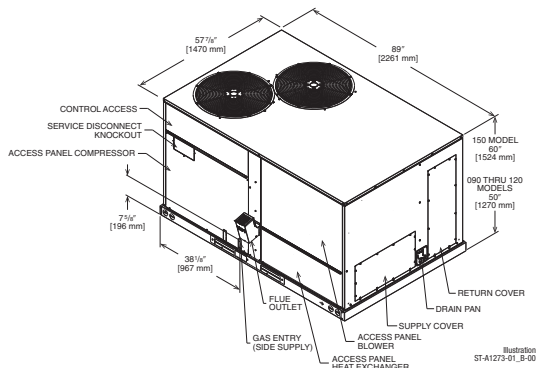

SUPPLY AND RETURN DIMENSIONS FOR HORIZONTAL APPLICATIONS

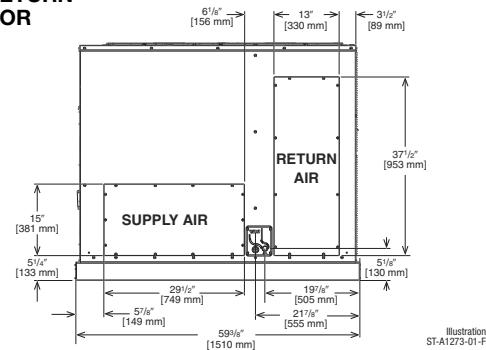

SUPPLY AND RETURN DIMENSIONS FOR DOWNFLOW APPLICATIONS

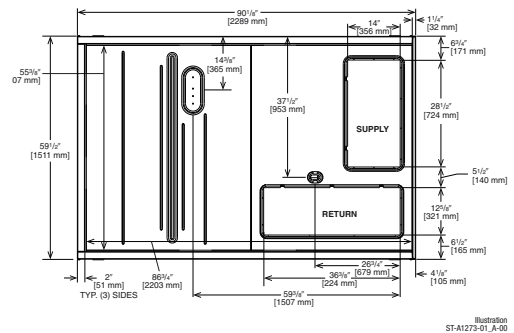

[] Designates Metric Conversions

Accessory
Economizer w/Single Enthalpy (Downflow)
Economizer w/Single Enthalpy (Horizontal)
Economizer-w/Single Enthalpy (Downflow) DDC
Economizer w/Single Enthalpy (Horizontal) DDC
Dual Enthalpy Kit
Dual Enthalpy Kit DDC
Carbon Dioxide Sensor (Wall Mount)
Power Exhaust
Power Exhaust
Manual Fresh Air Damper
Motorized Fresh Air Damper
Motorized Fresh Air Damper (DDC)
Roofcurb, 14"
Roofcurb, 24"*
Roofcurb Adapter
Concentric Diffuser 7.5/8.5 Ton Flush
Concentric Diffuser 10.0 Ton Flush
Concentric Diffuser 12.5 Ton Flush
Concentric Diffuser 7.5/8.5 Ton Drop

Accessory
Concentric Diffuser 10.0 Ton Drop
Concentric Diffuser 12.5 Ton Drop
Concentric Adapter 7.5/8.5 Ton Drop
Concentric Adapter 10 Ton Drop
Concentric Adapter 12.5 Ton Drop
Outdoor Coil Louver Kit - GED-090/102/120
Outdoor Coil Louver Kit - GED-150
Unwired Convenience Outlet
Unfused Service Disconnect
Comfort Alert (1 Per Compressor)
BACnet Communication Card
LonWorks Communication Card
Room Humidity Sensor
Room Temperature and Relative Humidity Sensor
Low-Ambient Control Kit
Freeze Stat Kit
LP Conversion Kit
Variable Frequency Drive Kit*
*See model number break down below

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

Rheem Sales Company, Inc.
P.O. Box 17010, Fort Smith, AR 72917

"In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice."