



The new degree of comfort.™

Rheem Commercial Classic® Series Package Gas Electric Unit



RKNL- 13 SEER Series RKPL- 14 SEER Series

Nominal Sizes 3-5 Tons [10.6-17.6 kW]



“Proper sizing and installation of equipment is critical to achieve optimal performance. Ask your Contractor for details or visit www.energystar.gov.”

TABLE OF CONTENTS

Unit Features & Benefits	3-4
Model Number Identification	5
Options	6
Selection Procedure	7
General Data	
RKNL- Series	8-28
RKPL- Series	29-46
General Data Notes	47
Gross Systems Performance Data	
RKNL- Series	48-49
RKPL- Series	50-51
Indoor Airflow Performance	52-59
Electrical Data	
RKNL- Series	60-69
RKPL- Series	70-77
Dimensional Data	78-80
Accessories	81-89
Wiring Diagrams	90-97
Limited Warranty	98



RKNL - A036, A042, A048, A060
RKPL - A036, A042, A048, A060

RKNL-/RKPL- STANDARD FEATURES INCLUDE:

- R-410A HFC refrigerant.
- Complete factory charged, wired and run tested.
- Scroll compressors with internal line break overload and high-pressure protection.
- Single stage compressor on all models.
- Convertible airflow.
- TXV refrigerant metering system on each circuit.
- High Pressure and Low Pressure/Loss of charge protection standard on all models.
- Solid Core liquid line filter drier on each circuit.
- Single slab, single pass designed evaporator coil facilitate easy cleaning for maintained high efficiencies.
- Cooling operation up to 125 degree F ambient.
- Easily removable filter, blower, gas heat, and compressor/control access panels permits prompt service.
- Powder Paint Finish meets ASTM B117 steel coated on each side for maximum protection. G90 galvanized.
- One piece top cover and one piece base pan with drawn supply and return opening for superior water management.
- Externally mounted refrigerant gauge ports for easy service diagnostics.
- Easy to install plug-in; slip in, 100% fully modulating economizer.
- Forkable base rails for easy handling and lifting.
- Single point electrical and gas connections.
- Direct drive or high performance belt drive motor with variable pitch pulleys and quick adjust belt system.
- Permanently lubricated evaporator, condenser and gas heat inducer motors.
- Condenser motors are internally protected, totally enclosed with shaft down design.
- 1 inch filter standard with slide out design. Will accept 2 inch filter.
- Single stage gas valve, direct spark ignition, and induced draft for efficiency and reliability.
- Tubular heat exchange for long life and induced draft for efficiency and reliability.
- Solid state furnace control with on board diagnostics.
- Colored and labeled wiring.
- Copper tube/Aluminum Fin coils.
- Molded compressor plug.
- Through the base gas and electric.

Package Gas Electric Unit Features:

Evaporator Coil/Filter Access

- Return air filters, normally provided, are removed in this photo.



- Non-corrosive plastic condensate pan




Tubular Heat Exchanger

- Aluminized steel (viewed from supply air side panel.)
- Stainless steel available

Control Box Access




Compressor Access (3 to 5 Ton [10.6 to 17.6 kW] Models)

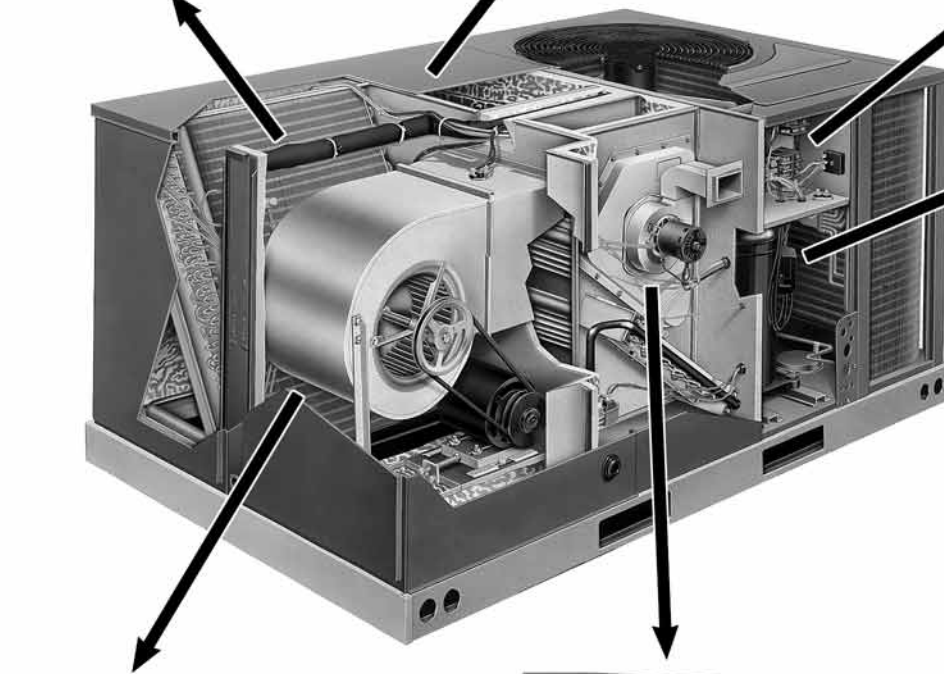

Blower Access

- Belt drive model shown. (Available on 3-phase models only.)

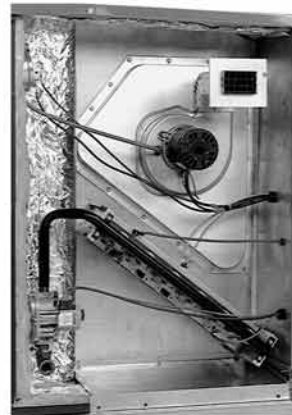


Heating Compartment Access

[] Designates Metric Conversions



R K N L — A 036 J K 08 E X X X

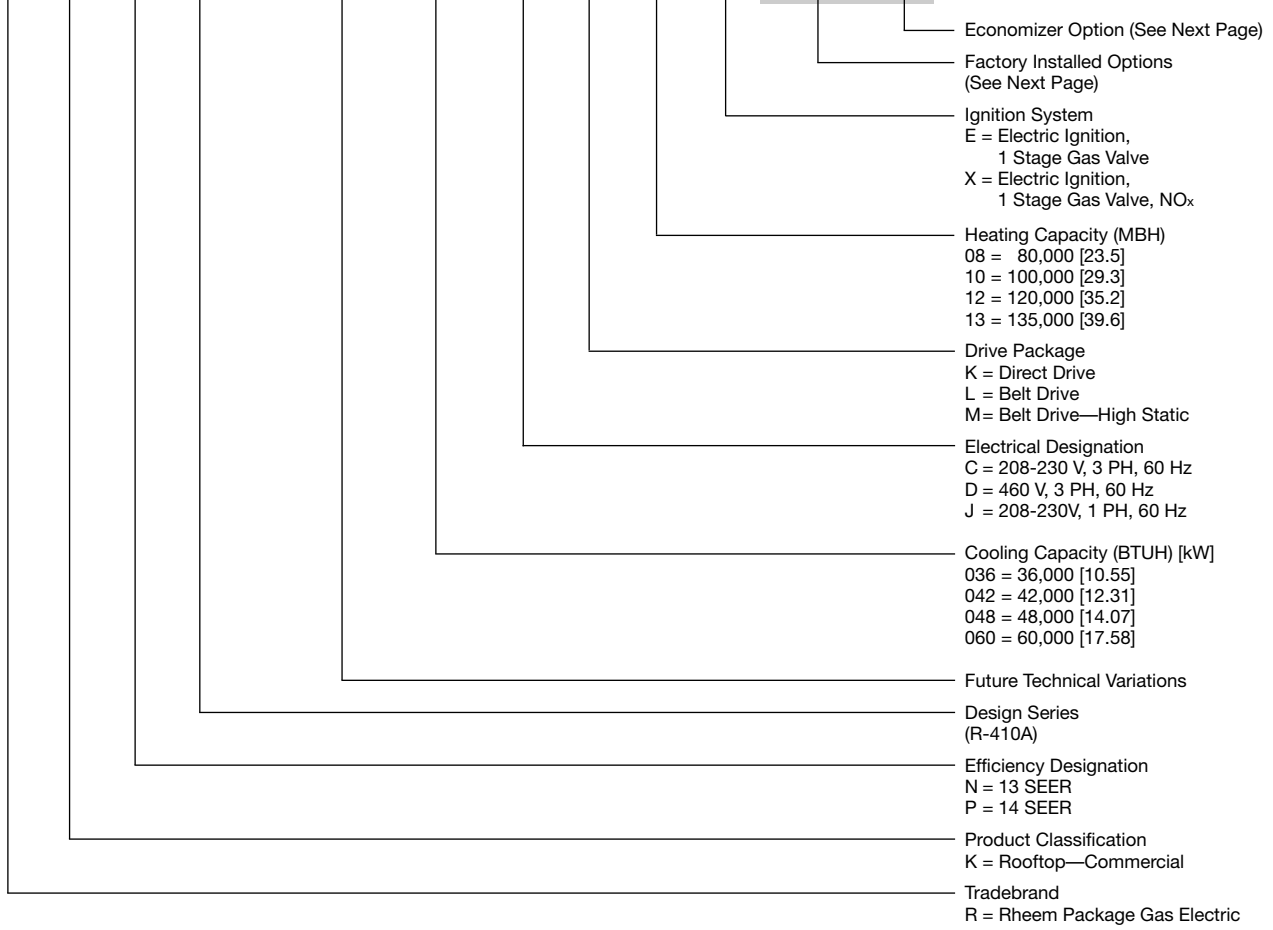

[] Designates Metric Conversions



FACTORY INSTALLED OPTION CODES FOR RKNL/RKPL (3-5 TON) [10.6-17.6 kW] (A036, A042, A048, A060)

Option Code	Hail Guard	Stainless Steel Heat Exchanger	Non-Powered Convenience Outlet/Unfused Service Disconnect	Low Ambient/Freeze Stat
AD	X			
AJ		X		
AH			X	
AP				X
BF	X		X	
BG	X	X		
BY	X			X
JB		X	X	
CR	X	X		X
DN	X	X	X	X

Economizer Codes

A = No Economizer

B = Economizer with Single Enthalpy

Example: RKNL-A060JK13E**XX** (where **XX** is factory installed option)

Example: No Options

RKNL-A060JK13E

Example: No option with factory installed economizer

RKNL-A060JK13EAAF

Example: Options with stainless steel heat exchanger and no factory installed economizer

RKNL-A060JK13EAJA

Example: Options same as above with factory installed economizer

RKNL-A060JK13EAJF

ECONOMIZER SELECTION FOR RKNL/RKPL (3-5 TON) [10.6-17.6 kW]

Option Code	No Economizer	Single Enthalpy Economizer With Barometric Relief
A	X	
F		X

“x” indicates factory installed option.

[] Designates Metric Conversions

1. Determine cooling and heating requirements at design conditions.

Example:

Power Supply	208/230-3 Phase
Total cooling capacity	42,500 BTUH [12.44 kW]
Sensible cooling capacity	34,000 BTUH [9.96 kW]
Heating capacity	96,000 BTUH [28.13 kW]
Condenser entering air	95°F [35°C]
Evaporator entering air	63°F [17°C] wb/76°F [24°C] db
Indoor air flow	1600 CFM [755 L/s]
External static pressure	1.1 in wg
Required efficiency	13 SEER

2. Select unit to meet cooling requirements.

Since total cooling is within the range of 4 ton [14.07 kW] unit and requires 13 SEER efficiency level, enter cooling performance from the RKNL-A048 at 95°F [35°C] outdoor temperature, 63°F [17°C] wb entering indoor air, and 1600 CFM [755 L/s]:

Total capacity	45,100 BTUH [13.21 kW]
Sensible capacity	44,100 BTUH [12.01 kW]
Power input	3.6 kW

And also, at 76°F [24°C] db indoor entering air, and using the formula at the bottom of the table:

Sensible capacity	38,327 BTUH [11.22 kW]
-------------------------	------------------------

3. Select heating capacity of the unit.

In the general data tables, note that the heating capacity of the 4 ton [14.07 kW] model with the 135,000 input heater can deliver 109,400 BTUH [32.03 kW], which is suitable for this application.

4. Determine blower speed and power to meet the system requirements.

At the given external static pressure of 1.1 in wg, the belt model must be selected. Enter the belt drive blower performance data at 1600 CFM [755 L/s] and 1.1 in wg ESP:

RPM	1195
Watts	755
Drive	M

5. Calculate indoor blower BTUH heat effect.

$$\text{BTUH} = \text{Watts} \times 3.413 = 2577$$

6. Calculate net cooling capacities.

$$\begin{aligned} \text{Net total cooling} &= 45,100 - 2577 = 42,523 \text{ BTUH [12.45 kW]} \\ \text{Net sensible cooling} &= 41,708 - 2577 = 39,131 \text{ BTUH [11.45 kW]} \end{aligned}$$

7. Select model

RKNL-A048CM13E

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKNL - Series	A036CK08E	A036CK12E	A036CL08E	A036CL12E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	36,800 [10.78]	36,800 [10.78]	36,800 [10.78]	36,800 [10.78]
EER/SEER ²	11.4/13	11.4/13	11.4/13	11.4/13
Nominal CFM/AHRI Rated CFM [L/s]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]
AHRI Net Cooling Capacity Btu [kW]	35,400 [10.37]	35,400 [10.37]	35,400 [10.37]	35,400 [10.37]
Net Sensible Capacity Btu [kW]	26,200 [7.68]	26,200 [7.68]	26,200 [7.68]	26,200 [7.68]
Net Latent Capacity Btu [kW]	9,200 [2.7]	9,200 [2.7]	9,200 [2.7]	9,200 [2.7]
Net System Power kW	3.1	3.1	3.1	3.1
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	80,000 [23.44]	120,000 [35.16]	80,000 [23.44]	120,000 [35.16]
Heating Output Btu [kW]	64,800 [18.99]	97,200 [28.48]	64,800 [18.99]	97,200 [28.48]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	30-60 [16.7/33.3]	50-80 [27.8/44.4]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	4	6	4	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Direct/3	Direct/3	Belt/Variable	Belt/Variable
No. Motors	1	1	1	1
Motor HP	1/2	1/2	1/2	1/2
Motor RPM	1075	1075	1725	1725
Motor Frame Size	48	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	96 [2722]	96 [2722]	96 [2722]	96 [2722]
Weights				
Net Weight lbs. [kg]	543 [246]	543 [246]	543 [246]	543 [246]
Ship Weight lbs. [kg]	550 [249]	550 [249]	550 [249]	550 [249]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKNL- Series	A036CM08E	A036CM12E	A036DK08E	A036DK12E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	36,800 [10.78]	36,800 [10.78]	36,800 [10.78]	36,800 [10.78]
EER/SEER ²	11.4/13	11.4/13	11.4/13	11.4/13
Nominal CFM/AHRI Rated CFM [L/s]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]
AHRI Net Cooling Capacity Btu [kW]	35,400 [10.37]	35,400 [10.37]	35,400 [10.37]	35,400 [10.37]
Net Sensible Capacity Btu [kW]	26,200 [7.68]	26,200 [7.68]	26,200 [7.68]	26,200 [7.68]
Net Latent Capacity Btu [kW]	9,200 [2.7]	9,200 [2.7]	9,200 [2.7]	9,200 [2.7]
Net System Power kW	3.1	3.1	3.1	3.1
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	80,000 [23.44]	120,000 [35.16]	80,000 [23.44]	120,000 [35.16]
Heating Output Btu [kW]	64,800 [18.99]	97,200 [28.48]	64,800 [18.99]	97,200 [28.48]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	30-60 [16.7/33.3]	50-80 [27.8/44.4]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	4	6	4	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Direct/3	Direct/3
No. Motors	1	1	1	1
Motor HP	1/2	1/2	1/2	1/2
Motor RPM	1725	1725	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	96 [2722]	96 [2722]	96 [2722]	96 [2722]
Weights				
Net Weight lbs. [kg]	543 [246]	543 [246]	543 [246]	543 [246]
Ship Weight lbs. [kg]	550 [249]	550 [249]	550 [249]	550 [249]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKNL- Series	A036DL08E	A036DL12E	A036DM08E	A036DM12E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	36,800 [10.78]	36,800 [10.78]	36,800 [10.78]	36,800 [10.78]
EER/SEER ²	11.4/13	11.4/13	11.4/13	11.4/13
Nominal CFM/AHRI Rated CFM [L/s]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]
AHRI Net Cooling Capacity Btu [kW]	35,400 [10.37]	35,400 [10.37]	35,400 [10.37]	35,400 [10.37]
Net Sensible Capacity Btu [kW]	26,200 [7.68]	26,200 [7.68]	26,200 [7.68]	26,200 [7.68]
Net Latent Capacity Btu [kW]	9,200 [2.7]	9,200 [2.7]	9,200 [2.7]	9,200 [2.7]
Net System Power kW	3.1	3.1	3.1	3.1
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	80,000 [23.44]	120,000 [35.16]	80,000 [23.44]	120,000 [35.16]
Heating Output Btu [kW]	64,800 [18.99]	97,200 [28.48]	64,800 [18.99]	97,200 [28.48]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	30-60 [16.7/33.3]	50-80 [27.8/44.4]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	4	6	4	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Belt/Variable	Belt/Variable
No. Motors	1	1	1	1
Motor HP	1/2	1/2	1/2	1/2
Motor RPM	1725	1725	1725	1725
Motor Frame Size	48	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	96 [2722]	96 [2722]	96 [2722]	96 [2722]
Weights				
Net Weight lbs. [kg]	543 [246]	543 [246]	543 [246]	543 [246]
Ship Weight lbs. [kg]	550 [249]	550 [249]	550 [249]	550 [249]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKNL- Series	A036JK08E	A036JK08X	A036JK12E	A036JK12X
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	36,800 [10.78]	36,800 [10.78]	36,800 [10.78]	36,800 [10.78]
EER/SEER ²	11.4/13	11.4/13	11.4/13	11.4/13
Nominal CFM/AHRI Rated CFM [L/s]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]
AHRI Net Cooling Capacity Btu [kW]	35,400 [10.37]	35,400 [10.37]	35,400 [10.37]	35,400 [10.37]
Net Sensible Capacity Btu [kW]	26,200 [7.68]	26,200 [7.68]	26,200 [7.68]	26,200 [7.68]
Net Latent Capacity Btu [kW]	9,200 [2.7]	9,200 [2.7]	9,200 [2.7]	9,200 [2.7]
Net System Power kW	3.1	3.1	3.1	3.1
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	80,000 [23.44]	80,000 [23.44]	120,000 [35.16]	120,000 [35.16]
Heating Output Btu [kW]	62,500 [18.31]	62,500 [18.31]	94,500 [27.69]	94,500 [27.69]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	50-80 [27.8/44.4]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	4	4	6	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Direct/3	Direct/3	Direct/3	Direct/3
No. Motors	1	1	1	1
Motor HP	1/2	1/2	1/2	1/2
Motor RPM	1075	1075	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	96 [2722]	96 [2722]	96 [2722]	96 [2722]
Weights				
Net Weight lbs. [kg]	543 [246]	543 [246]	543 [246]	543 [246]
Ship Weight lbs. [kg]	550 [249]	550 [249]	550 [249]	550 [249]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKNL- Series	A036YL08E	A036YL12E	A036YM08E	A036YM12E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	36,800 [10.78]	36,800 [10.78]	36,800 [10.78]	36,800 [10.78]
EER/SEER ²	11.4/13	11.4/13	11.4/13	11.4/13
Nominal CFM/AHRI Rated CFM [L/s]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]
AHRI Net Cooling Capacity Btu [kW]	35,400 [10.37]	35,400 [10.37]	35,400 [10.37]	35,400 [10.37]
Net Sensible Capacity Btu [kW]	26,200 [7.68]	26,200 [7.68]	26,200 [7.68]	26,200 [7.68]
Net Latent Capacity Btu [kW]	9,200 [2.7]	9,200 [2.7]	9,200 [2.7]	9,200 [2.7]
Net System Power kW	3.1	3.1	3.1	3.1
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	80,000 [23.44]	120,000 [35.16]	80,000 [23.44]	120,000 [35.16]
Heating Output Btu [kW]	64,800 [18.99]	97,200 [28.48]	64,800 [18.99]	97,200 [28.48]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	30-60 [16.7/33.3]	50-80 [27.8/44.4]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	4	6	4	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Belt/Variable	Belt/Variable
No. Motors	1	1	1	1
Motor HP	3/4	3/4	3/4	3/4
Motor RPM	1725	1725	1725	1725
Motor Frame Size	56	56	56	56
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	96 [2722]	96 [2722]	96 [2722]	96 [2722]
Weights				
Net Weight lbs. [kg]	543 [246]	543 [246]	543 [246]	543 [246]
Ship Weight lbs. [kg]	550 [249]	550 [249]	550 [249]	550 [249]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKNL- Series	A042CK08E	A042CK12E	A042CL08E	A042CL12E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	42,500 [12.45]	42,500 [12.45]	42,500 [12.45]	42,500 [12.45]
EER/SEER ²	11.2/13	11.2/13	11.2/13	11.2/13
Nominal CFM/AHRI Rated CFM [L/s]	1400/1450 [661/684]	1400/1450 [661/684]	1400/1450 [661/684]	1400/1450 [661/684]
AHRI Net Cooling Capacity Btu [kW]	40,500 [11.87]	40,500 [11.87]	40,500 [11.87]	40,500 [11.87]
Net Sensible Capacity Btu [kW]	30,600 [8.97]	30,600 [8.97]	30,600 [8.97]	30,600 [8.97]
Net Latent Capacity Btu [kW]	9,900 [2.9]	9,900 [2.9]	9,900 [2.9]	9,900 [2.9]
Net System Power kW	3.62	3.62	3.62	3.62
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	80,000 [23.44]	120,000 [35.16]	80,000 [23.44]	120,000 [35.16]
Heating Output Btu [kW]	64,800 [18.99]	97,200 [28.48]	64,800 [18.99]	97,200 [28.48]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	30-60 [16.7/33.3]	50-80 [27.8/44.4]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	4	6	4	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1.53 / 22 [9]	1.53 / 22 [9]	1.53 / 22 [9]	1.53 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Direct/3	Direct/3	Belt/Variable	Belt/Variable
No. Motors	1	1	1	1
Motor HP	1/2	1/2	1/2	1/2
Motor RPM	1075	1075	1725	1725
Motor Frame Size	48	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	125 [3544]	125 [3544]	125 [3544]	125 [3544]
Weights				
Net Weight lbs. [kg]	570 [259]	579 [263]	570 [259]	579 [263]
Ship Weight lbs. [kg]	577 [262]	586 [266]	577 [262]	586 [266]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKNL- Series	A042CM08E	A042CM12E	A042DK08E	A042DK12E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	42,500 [12.45]	42,500 [12.45]	42,500 [12.45]	42,500 [12.45]
EER/SEER ²	11.2/13	11.2/13	11.2/13	11.2/13
Nominal CFM/AHRI Rated CFM [L/s]	1400/1450 [661/684]	1400/1450 [661/684]	1400/1450 [661/684]	1400/1450 [661/684]
AHRI Net Cooling Capacity Btu [kW]	40,500 [11.87]	40,500 [11.87]	40,500 [11.87]	40,500 [11.87]
Net Sensible Capacity Btu [kW]	30,600 [8.97]	30,600 [8.97]	30,600 [8.97]	30,600 [8.97]
Net Latent Capacity Btu [kW]	9,900 [2.9]	9,900 [2.9]	9,900 [2.9]	9,900 [2.9]
Net System Power kW	3.62	3.62	3.62	3.62
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	80,000 [23.44]	120,000 [35.16]	80,000 [23.44]	120,000 [35.16]
Heating Output Btu [kW]	64,800 [18.99]	97,200 [28.48]	64,800 [18.99]	97,200 [28.48]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	30-60 [16.7/33.3]	50-80 [27.8/44.4]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	4	6	4	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1.53 / 22 [9]	1.53 / 22 [9]	1.53 / 22 [9]	1.53 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Direct/3	Direct/3
No. Motors	1	1	1	1
Motor HP	1/2	1/2	1/2	1/2
Motor RPM	1725	1725	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	125 [3544]	125 [3544]	125 [3544]	125 [3544]
Weights				
Net Weight lbs. [kg]	570 [259]	570 [259]	570 [259]	579 [263]
Ship Weight lbs. [kg]	577 [262]	577 [262]	577 [262]	586 [266]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKNL- Series	A042DL08E	A042DL12E	A042DM08E	A042DM12E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	42,500 [12.45]	42,500 [12.45]	42,500 [12.45]	42,500 [12.45]
EER/SEER ²	11.2/13	11.2/13	11.2/13	11.2/13
Nominal CFM/AHRI Rated CFM [L/s]	1400/1450 [661/684]	1400/1450 [661/684]	1400/1450 [661/684]	1400/1450 [661/684]
AHRI Net Cooling Capacity Btu [kW]	40,500 [11.87]	40,500 [11.87]	40,500 [11.87]	40,500 [11.87]
Net Sensible Capacity Btu [kW]	30,600 [8.97]	30,600 [8.97]	30,600 [8.97]	30,600 [8.97]
Net Latent Capacity Btu [kW]	9,900 [2.9]	9,900 [2.9]	9,900 [2.9]	9,900 [2.9]
Net System Power kW	3.62	3.62	3.62	3.62
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	80,000 [23.44]	120,000 [35.16]	80,000 [23.44]	120,000 [35.16]
Heating Output Btu [kW]	64,800 [18.99]	97,200 [28.48]	64,800 [18.99]	97,200 [28.48]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	30-60 [16.7/33.3]	50-80 [27.8/44.4]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	4	6	4	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1.53 / 22 [9]	1.53 / 22 [9]	1.53 / 22 [9]	1.53 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Belt/Variable	Belt/Variable
No. Motors	1	1	1	1
Motor HP	1/2	1/2	1/2	1/2
Motor RPM	1725	1725	1725	1725
Motor Frame Size	48	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	125 [3544]	125 [3544]	125 [3544]	125 [3544]
Weights				
Net Weight lbs. [kg]	570 [259]	570 [259]	570 [259]	570 [259]
Ship Weight lbs. [kg]	577 [262]	577 [262]	577 [262]	577 [262]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKNL- Series	A042JK08E	A042JK08X	A042JK12E	A042JK12X
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	42,500 [12.45]	42,500 [12.45]	42,500 [12.45]	42,500 [12.45]
EER/SEER ²	11.2/13	11.2/13	11.2/13	11.2/13
Nominal CFM/AHRI Rated CFM [L/s]	1400/1450 [661/684]	1400/1450 [661/684]	1400/1450 [661/684]	1400/1450 [661/684]
AHRI Net Cooling Capacity Btu [kW]	40,500 [11.87]	40,500 [11.87]	40,500 [11.87]	40,500 [11.87]
Net Sensible Capacity Btu [kW]	30,600 [8.97]	30,600 [8.97]	30,600 [8.97]	30,600 [8.97]
Net Latent Capacity Btu [kW]	9,900 [2.9]	9,900 [2.9]	9,900 [2.9]	9,900 [2.9]
Net System Power kW	3.62	3.62	3.62	3.62
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	80,000 [23.44]	80,000 [23.44]	120,000 [35.16]	120,000 [35.16]
Heating Output Btu [kW]	62,500 [18.31]	62,500 [18.31]	94,500 [27.69]	94,500 [27.69]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	50-80 [27.8/44.4]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	4	4	6	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1.53 / 22 [9]	1.53 / 22 [9]	1.53 / 22 [9]	1.53 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Direct/3	Direct/3	Direct/3	Direct/3
No. Motors	1	1	1	1
Motor HP	1/2	1/2	1/2	1/2
Motor RPM	1075	1075	1725	1075
Motor Frame Size	48	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	125 [3544]	125 [3544]	125 [3544]	125 [3544]
Weights				
Net Weight lbs. [kg]	570 [259]	570 [259]	579 [263]	579 [263]
Ship Weight lbs. [kg]	577 [262]	577 [262]	586 [266]	586 [266]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKNL- Series	A048CK08E	A048CK10E	A048CK13E	A048CL08E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	50,000 [14.65]	50,000 [14.65]	50,000 [14.65]	50,000 [14.65]
EER/SEER ²	11.45/13	11.45/13	11.45/13	11.45/13
Nominal CFM/AHRI Rated CFM [L/s]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]
AHRI Net Cooling Capacity Btu [kW]	48,000 [14.06]	48,000 [14.06]	48,000 [14.06]	48,000 [14.06]
Net Sensible Capacity Btu [kW]	35,600 [10.43]	35,600 [10.43]	35,600 [10.43]	35,600 [10.43]
Net Latent Capacity Btu [kW]	12,400 [3.63]	12,400 [3.63]	12,400 [3.63]	12,400 [3.63]
Net System Power kW	4.19	4.19	4.19	4.19
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	80,000 [23.44]	100,000 [29.3]	135,000 [39.55]	80,000 [23.44]
Heating Output Btu [kW]	64,800 [18.99]	81,000 [23.73]	109,400 [32.05]	64,800 [18.99]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	40-70 [22.2/38.9]	50-80 [27.8/44.4]	30-60 [16.7/33.3]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	4	5	6	4
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Direct/3	Direct/3	Direct/3	Belt/Variable
No. Motors	1	1	1	1
Motor HP	1/2	1/2	1/2	1/2
Motor RPM	1075	1075	1075	1725
Motor Frame Size	48	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	165 [4678]	165 [4678]	165 [4678]	165 [4678]
Weights				
Net Weight lbs. [kg]	580 [263]	580 [263]	585 [265]	580 [263]
Ship Weight lbs. [kg]	587 [266]	587 [266]	592 [269]	587 [266]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKNL- Series	A048CL10E	A048CL13E	A048CM08E	A048CM10E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	50,000 [14.65]	50,000 [14.65]	50,000 [14.65]	50,000 [14.65]
EER/SEER ²	11.45/13	11.45/13	11.45/13	11.45/13
Nominal CFM/AHRI Rated CFM [L/s]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]
AHRI Net Cooling Capacity Btu [kW]	48,000 [14.06]	48,000 [14.06]	48,000 [14.06]	48,000 [14.06]
Net Sensible Capacity Btu [kW]	35,600 [10.43]	35,600 [10.43]	35,600 [10.43]	35,600 [10.43]
Net Latent Capacity Btu [kW]	12,400 [3.63]	12,400 [3.63]	12,400 [3.63]	12,400 [3.63]
Net System Power kW	4.19	4.19	4.19	4.19
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	100,000 [29.3]	135,000 [39.55]	80,000 [23.44]	100,000 [29.3]
Heating Output Btu [kW]	81,000 [23.73]	109,400 [32.05]	64,800 [18.99]	81,000 [23.73]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	30-60 [16.7/33.3]	30-60 [16.7/33.3]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	5	6	4	5
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Belt/Variable	Belt/Variable
No. Motors	1	1	1	1
Motor HP	1/2	1/2	3/4	3/4
Motor RPM	1725	1725	1725	1725
Motor Frame Size	48	48	56	56
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	165 [4678]	165 [4678]	165 [4678]	165 [4678]
Weights				
Net Weight lbs. [kg]	580 [263]	585 [265]	580 [263]	580 [263]
Ship Weight lbs. [kg]	587 [266]	592 [269]	587 [266]	587 [266]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKNL- Series	A048CM13E	A048DK08E	A048DK10E	A048DK13E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	50,000 [14.65]	50,000 [14.65]	50,000 [14.65]	50,000 [14.65]
EER/SEER ²	11.45/13	11.45/13	11.45/13	11.45/13
Nominal CFM/AHRI Rated CFM [L/s]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]
AHRI Net Cooling Capacity Btu [kW]	48,000 [14.06]	48,000 [14.06]	48,000 [14.06]	48,000 [14.06]
Net Sensible Capacity Btu [kW]	35,600 [10.43]	35,600 [10.43]	35,600 [10.43]	35,600 [10.43]
Net Latent Capacity Btu [kW]	12,400 [3.63]	12,400 [3.63]	12,400 [3.63]	12,400 [3.63]
Net System Power kW	4.19	4.19	4.19	4.19
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	135,000 [39.55]	80,000 [23.44]	100,000 [29.3]	135,000 [39.55]
Heating Output Btu [kW]	109,400 [32.05]	64,800 [18.99]	81,000 [23.73]	109,400 [32.05]
Temperature Rise Range °F [°C]	50-80 [27.8/44.4]	30-60 [16.7/33.3]	30-60 [16.7/33.3]	50-80 [27.8/44.4]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	6	4	5	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Direct/3	Direct/3	Direct/3
No. Motors	1	1	1	1
Motor HP	3/4	1/2	1/2	1/2
Motor RPM	1725	1075	1075	1075
Motor Frame Size	56	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	165 [4678]	165 [4678]	165 [4678]	165 [4678]
Weights				
Net Weight lbs. [kg]	580 [263]	580 [263]	580 [263]	585 [265]
Ship Weight lbs. [kg]	587 [266]	587 [266]	587 [266]	592 [269]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKNL- Series	A048DL08E	A048DL10E	A048DL13E	A048DM08E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	50,000 [14.65]	50,000 [14.65]	50,000 [14.65]	50,000 [14.65]
EER/SEER ²	11.45/13	11.45/13	11.45/13	11.45/13
Nominal CFM/AHRI Rated CFM [L/s]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]
AHRI Net Cooling Capacity Btu [kW]	48,000 [14.06]	48,000 [14.06]	48,000 [14.06]	48,000 [14.06]
Net Sensible Capacity Btu [kW]	35,600 [10.43]	35,600 [10.43]	35,600 [10.43]	35,600 [10.43]
Net Latent Capacity Btu [kW]	12,400 [3.63]	12,400 [3.63]	12,400 [3.63]	12,400 [3.63]
Net System Power kW	4.19	4.19	4.19	4.19
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	80,000 [23.44]	100,000 [29.3]	135,000 [39.55]	80,000 [23.44]
Heating Output Btu [kW]	64,800 [18.99]	81,000 [23.73]	109,400 [32.05]	64,800 [18.99]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	30-60 [16.7/33.3]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	4	5	6	4
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Belt/Variable	Belt/Variable
No. Motors	1	1	1	1
Motor HP	1/2	1/2	1/2	3/4
Motor RPM	1725	1725	1725	1725
Motor Frame Size	48	48	48	56
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	165 [4678]	165 [4678]	165 [4678]	165 [4678]
Weights				
Net Weight lbs. [kg]	580 [263]	580 [263]	585 [265]	580 [263]
Ship Weight lbs. [kg]	587 [266]	587 [266]	592 [269]	587 [266]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKNL- Series	A048DM10E	A048DM13E	A048JK08E	A048JK08X
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	50,000 [14.65]	50,000 [14.65]	50,000 [14.65]	50,000 [14.65]
EER/SEER ²	11.45/13	11.45/13	11.45/13	11.45/13
Nominal CFM/AHRI Rated CFM [L/s]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]
AHRI Net Cooling Capacity Btu [kW]	48,000 [14.06]	48,000 [14.06]	48,000 [14.06]	48,000 [14.06]
Net Sensible Capacity Btu [kW]	35,600 [10.43]	35,600 [10.43]	35,600 [10.43]	35,600 [10.43]
Net Latent Capacity Btu [kW]	12,400 [3.63]	12,400 [3.63]	12,400 [3.63]	12,400 [3.63]
Net System Power kW	4.19	4.19	4.19	4.19
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	100,000 [29.3]	135,000 [39.55]	80,000 [23.44]	80,000 [23.44]
Heating Output Btu [kW]	81,000 [23.73]	109,400 [32.05]	62,500 [18.31]	62,500 [18.31]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	30-60 [16.7/33.3]	30-60 [16.7/33.3]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	5	6	4	4
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Direct/3	Direct/3
No. Motors	1	1	1	1
Motor HP	3/4	3/4	1/2	1/2
Motor RPM	1725	1725	1075	1075
Motor Frame Size	56	56	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	165 [4678]	165 [4678]	165 [4678]	165 [4678]
Weights				
Net Weight lbs. [kg]	580 [263]	580 [263]	580 [263]	580 [263]
Ship Weight lbs. [kg]	587 [266]	587 [266]	587 [266]	587 [266]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKNL- Series	A048JK10E	A048JK10X	A048JK13E	A048JK13X
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	50,000 [14.65]	50,000 [14.65]	50,000 [14.65]	50,000 [14.65]
EER/SEER ²	11.45/13	11.45/13	11.45/13	11.45/13
Nominal CFM/AHRI Rated CFM [L/s]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]
AHRI Net Cooling Capacity Btu [kW]	48,000 [14.06]	48,000 [14.06]	48,000 [14.06]	48,000 [14.06]
Net Sensible Capacity Btu [kW]	35,600 [10.43]	35,600 [10.43]	35,600 [10.43]	35,600 [10.43]
Net Latent Capacity Btu [kW]	12,400 [3.63]	12,400 [3.63]	12,400 [3.63]	12,400 [3.63]
Net System Power kW	4.19	4.19	4.19	4.19
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	100,000 [29.3]	100,000 [29.3]	135,000 [39.55]	135,000 [39.55]
Heating Output Btu [kW]	78,500 [23]	78,500 [23]	106,500 [31.2]	106,500 [31.2]
Temperature Rise Range °F [°C]	40-70 [22.2/38.9]	40-70 [22.2/38.9]	50-80 [27.8/44.4]	50-80 [27.8/44.4]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	5	5	6	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Direct/3	Direct/3	Direct/3	Direct/3
No. Motors	1	1	1	1
Motor HP	1/2	1/2	1/2	1/2
Motor RPM	1075	1075	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	165 [4678]	165 [4678]	165 [4678]	165 [4678]
Weights				
Net Weight lbs. [kg]	580 [263]	580 [263]	585 [265]	585 [265]
Ship Weight lbs. [kg]	587 [266]	587 [266]	592 [269]	592 [269]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKNL- Series	A048YL10E	A048YL13E	A048YM10E	A048YM13E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	50,000 [14.65]	50,000 [14.65]	50,000 [14.65]	61,000 [17.87]
EER/SEER ²	11.45/13	11.45/13	11.45/13	11.45/13
Nominal CFM/AHRI Rated CFM [L/s]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]
AHRI Net Cooling Capacity Btu [kW]	48,000 [14.06]	48,000 [14.06]	48,000 [14.06]	48,000 [14.06]
Net Sensible Capacity Btu [kW]	35,600 [10.43]	35,600 [10.43]	35,600 [10.43]	35,600 [10.43]
Net Latent Capacity Btu [kW]	12,400 [3.63]	12,400 [3.63]	12,400 [3.63]	12,400 [3.63]
Net System Power kW	4.19	4.19	4.19	4.19
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	100,000 [29.3]	135,000 [39.55]	100,000 [29.3]	135,000 [39.55]
Heating Output Btu [kW]	81,000 [23.73]	109,400 [32.05]	81,000 [23.73]	109,400 [32.05]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	30-60 [16.7/33.3]	50-80 [27.8/44.4]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	5	6	5	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Belt/Variable	Belt/Variable
No. Motors	1	1	1	1
Motor HP	3/4	3/4	3/4	3/4
Motor RPM	1725	1725	1725	1725
Motor Frame Size	56	56	56	56
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	165 [4678]	165 [4678]	165 [4678]	165 [4678]
Weights				
Net Weight lbs. [kg]	580 [263]	585 [265]	580 [263]	580 [263]
Ship Weight lbs. [kg]	587 [266]	592 [269]	587 [266]	587 [266]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKNL- Series	A060CK10E	A060CK13E	A060CL10E	A060CL13E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	61,000 [17.87]	61,000 [17.87]	61,000 [17.87]	61,000 [17.87]
EER/SEER ²	11.1/13	11.1/13	11.1/13	11.1/13
Nominal CFM/AHRI Rated CFM [L/s]	2000/1900 [944/897]	2000/1900 [944/897]	2000/1900 [944/897]	2000/1900 [944/897]
AHRI Net Cooling Capacity Btu [kW]	59,000 [17.29]	59,000 [17.29]	59,000 [17.29]	59,000 [17.29]
Net Sensible Capacity Btu [kW]	42,000 [12.31]	42,000 [12.31]	42,000 [12.31]	42,000 [12.31]
Net Latent Capacity Btu [kW]	17,000 [4.98]	17,000 [4.98]	17,000 [4.98]	17,000 [4.98]
Net System Power kW	5.32	5.32	5.32	5.32
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	100,000 [29.3]	135,000 [39.55]	100,000 [29.3]	135,000 [39.55]
Heating Output Btu [kW]	81,000 [23.73]	109,400 [32.05]	81,000 [23.73]	109,400 [32.05]
Temperature Rise Range °F [°C]	25-55 [13.9/30.6]	40-70 [22.2/38.9]	25-55 [13.9/30.6]	40-70 [22.2/38.9]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	5	6	5	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	83	83	83	83
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3930 [1855]	3930 [1855]	3930 [1855]	3930 [1855]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Direct/3	Direct/3	Belt/Variable	Belt/Variable
No. Motors	1	1	1	1
Motor HP	1	1	3/4	3/4
Motor RPM	1075	1075	1725	1725
Motor Frame Size	48	48	56	56
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	160 [4536]	160 [4536]	160 [4536]	160 [4536]
Weights				
Net Weight lbs. [kg]	590 [268]	597 [271]	590 [268]	597 [271]
Ship Weight lbs. [kg]	597 [271]	604 [274]	597 [271]	604 [274]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKNL- Series	A060CM10E	A060CM13E	A060DK10E	A060DK13E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	61,000 [17.87]	61,000 [17.87]	61,000 [17.87]	61,000 [17.87]
EER/SEER ²	11.1/13	11.1/13	11.1/13	11.1/13
Nominal CFM/AHRI Rated CFM [L/s]	2000/1900 [944/897]	2000/1900 [944/897]	2000/1900 [944/897]	2000/1900 [944/897]
AHRI Net Cooling Capacity Btu [kW]	59,000 [17.29]	59,000 [17.29]	59,000 [17.29]	59,000 [17.29]
Net Sensible Capacity Btu [kW]	42,000 [12.31]	42,000 [12.31]	42,000 [12.31]	42,000 [12.31]
Net Latent Capacity Btu [kW]	17,000 [4.98]	17,000 [4.98]	17,000 [4.98]	17,000 [4.98]
Net System Power kW	5.32	5.32	5.32	5.32
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	100,000 [29.3]	135,000 [39.55]	100,000 [29.3]	135,000 [39.55]
Heating Output Btu [kW]	81,000 [23.73]	109,400 [32.05]	81,000 [23.73]	109,400 [32.05]
Temperature Rise Range °F [°C]	25-55 [13.9/30.6]	40-70 [22.2/38.9]	25-55 [13.9/30.6]	40-70 [22.2/38.9]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	5	6	5	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	83	83	83	83
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3930 [1855]	3930 [1855]	3930 [1855]	3930 [1855]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Direct/3	Direct/3
No. Motors	1	1	1	1
Motor HP	1	1	1	1
Motor RPM	1725	1725	1075	1075
Motor Frame Size	56	56	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	160 [4536]	160 [4536]	160 [4536]	160 [4536]
Weights				
Net Weight lbs. [kg]	590 [268]	590 [268]	590 [268]	597 [271]
Ship Weight lbs. [kg]	597 [271]	597 [271]	597 [271]	604 [274]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKNL- Series	A060DL10E	A060DL13E	A060DM10E	A060DM13E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	61,000 [17.87]	61,000 [17.87]	61,000 [17.87]	61,000 [17.87]
EER/SEER ²	11.1/13	11.1/13	11.1/13	11.1/13
Nominal CFM/AHRI Rated CFM [L/s]	2000/1900 [944/897]	2000/1900 [944/897]	2000/1900 [944/897]	2000/1900 [944/897]
AHRI Net Cooling Capacity Btu [kW]	59,000 [17.29]	59,000 [17.29]	59,000 [17.29]	59,000 [17.29]
Net Sensible Capacity Btu [kW]	42,000 [12.31]	42,000 [12.31]	42,000 [12.31]	42,000 [12.31]
Net Latent Capacity Btu [kW]	17,000 [4.98]	17,000 [4.98]	17,000 [4.98]	17,000 [4.98]
Net System Power kW	5.32	5.32	5.32	5.32
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	100,000 [29.3]	135,000 [39.55]	100,000 [29.3]	135,000 [39.55]
Heating Output Btu [kW]	81,000 [23.73]	109,400 [32.05]	81,000 [23.73]	109,400 [32.05]
Temperature Rise Range °F [°C]	25-55 [13.9/30.6]	40-70 [22.2/38.9]	25-55 [13.9/30.6]	40-70 [22.2/38.9]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	5	6	5	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	83	83	83	83
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3930 [1855]	3930 [1855]	3930 [1855]	3930 [1855]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Belt/Variable	Belt/Variable
No. Motors	1	1	1	1
Motor HP	3/4	3/4	1	1
Motor RPM	1725	1725	1725	1725
Motor Frame Size	56	56	56	56
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	160 [4536]	160 [4536]	160 [4536]	160 [4536]
Weights				
Net Weight lbs. [kg]	590 [268]	597 [271]	590 [268]	590 [268]
Ship Weight lbs. [kg]	597 [271]	604 [274]	597 [271]	597 [271]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKNL- Series	A060JK10E	A060JK10X	A060JK13E	A060JK13X
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	61,000 [17.87]	61,000 [17.87]	61,000 [17.87]	61,000 [17.87]
EER/SEER ²	11.1/13	11.1/13	11.1/13	11.1/13
Nominal CFM/AHRI Rated CFM [L/s]	2000/1900 [944/897]	2000/1900 [944/897]	2000/1900 [944/897]	2000/1900 [944/897]
AHRI Net Cooling Capacity Btu [kW]	59,000 [17.29]	59,000 [17.29]	59,000 [17.29]	59,000 [17.29]
Net Sensible Capacity Btu [kW]	42,000 [12.31]	42,000 [12.31]	42,000 [12.31]	42,000 [12.31]
Net Latent Capacity Btu [kW]	17,000 [4.98]	17,000 [4.98]	17,000 [4.98]	17,000 [4.98]
Net System Power kW	5.32	5.32	5.32	5.32
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	100,000 [29.3]	100,000 [29.3]	135,000 [39.55]	135,000 [39.55]
Heating Output Btu [kW]	78,500 [23]	78,500 [23]	106,500 [31.2]	106,500 [31.2]
Temperature Rise Range °F [°C]	25-55 [13.9/30.6]	25-55 [13.9/30.6]	40-70 [22.2/38.9]	40-70 [22.2/38.9]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	5	5	6	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	83	83	83	83
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3930 [1855]	3930 [1855]	3930 [1855]	3930 [1855]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Direct/3	Direct/3	Direct/3	Direct/3
No. Motors	1	1	1	1
Motor HP	1	1	1	1
Motor RPM	1075	1075	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	160 [4536]	160 [4536]	160 [4536]	160 [4536]
Weights				
Net Weight lbs. [kg]	590 [268]	590 [268]	597 [271]	597 [271]
Ship Weight lbs. [kg]	597 [271]	597 [271]	604 [274]	604 [274]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKNL- Series	A060YL10E	A060YL13E	A060YM10E	A060YM13E
Cooling Performance¹				
Gross Cooling Capacity Btu [kW]	61,000 [17.87]	61,000 [17.87]	61,000 [17.87]	61,000 [17.87]
EER/SEER ²	11.1/13	11.1/13	11.1/13	11.1/13
Nominal CFM/AHRI Rated CFM [L/s]	2000/1900 [944/897]	2000/1900 [944/897]	2000/1900 [944/897]	2000/1900 [944/897]
AHRI Net Cooling Capacity Btu [kW]	59,000 [17.29]	59,000 [17.29]	59,000 [17.29]	59,000 [17.29]
Net Sensible Capacity Btu [kW]	42,000 [12.31]	42,000 [12.31]	42,000 [12.31]	42,000 [12.31]
Net Latent Capacity Btu [kW]	17,000 [4.98]	17,000 [4.98]	17,000 [4.98]	17,000 [4.98]
Net System Power kW	5.32	5.32	5.32	5.32
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	100,000 [29.3]	135,000 [39.55]	100,000 [29.3]	135,000 [39.55]
Heating Output Btu [kW]	81,000 [23.73]	109,400 [32.05]	81,000 [23.73]	109,400 [32.05]
Temperature Rise Range °F [°C]	25-55 [13.9/30.6]	40-70 [22.2/38.9]	25-55 [13.9/30.6]	40-70 [22.2/38.9]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	5	6	5	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴				
	83	83	83	83
Outdoor Coil—Fin Type				
Tube Type	Louvered	Louvered	Louvered	Louvered
Tube Size in. [mm] OD	Rifled	Rifled	Rifled	Rifled
Face Area sq. ft. [sq. m]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Rows / FPI [FPcm]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type				
Tube Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Size in. [mm]	Rifled	Rifled	Rifled	Rifled
Face Area sq. ft. [sq. m]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Rows / FPI [FPcm]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type				
No. Used/Diameter in. [mm]	Propeller	Propeller	Propeller	Propeller
Drive Type/No. Speeds	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
CFM [L/s]	Direct/1	Direct/1	Direct/1	Direct/1
No. Motors/HP	3930 [1855]	3930 [1855]	3930 [1855]	3930 [1855]
Motor RPM	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
	1075	1075	1075	1075
Indoor Fan—Type				
No. Used/Diameter in. [mm]	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
Drive Type/No. Speeds	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
No. Motors	Belt/Variable	Belt/Variable	Belt/Variable	Belt/Variable
Motor HP	1	1	1	1
Motor RPM	3/4	3/4	1	1
Motor Frame Size	1725	1725	1725	1725
	56	56	56	56
Filter—Type				
Furnished	Disposable	Disposable	Disposable	Disposable
(No.) Size Recommended in. [mm]	Yes	Yes	Yes	Yes
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]				
	160 [4536]	160 [4536]	160 [4536]	160 [4536]
Weights				
Net Weight lbs. [kg]	590 [268]	597 [271]	590 [268]	590 [268]
Ship Weight lbs. [kg]	597 [271]	604 [274]	597 [271]	597 [271]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKPL - Series	A036CK08E	A036CK12E	A036CL08E	A036CL12E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	36,600 [10.72]	36,600 [10.72]	36,600 [10.72]	36,600 [10.72]
EER/SEER ²	12.05/14	12.05/14	12.05/14	12.05/14
Nominal CFM/AHRI Rated CFM [L/s]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]
AHRI Net Cooling Capacity Btu [kW]	35,800 [10.49]	35,800 [10.49]	35,800 [10.49]	35,800 [10.49]
Net Sensible Capacity Btu [kW]	27,000 [7.91]	27,000 [7.91]	27,000 [7.91]	27,000 [7.91]
Net Latent Capacity Btu [kW]	8,800 [2.58]	8,800 [2.58]	8,800 [2.58]	8,800 [2.58]
Net System Power kW	2.97	2.97	2.97	2.97
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	80,000 [23.44]	120,000 [35.16]	80,000 [23.44]	120,000 [35.16]
Heating Output Btu [kW]	64,800 [18.99]	97,200 [28.48]	64,800 [18.99]	97,200 [28.48]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	30-60 [16.7/33.3]	50-80 [27.8/44.4]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	4	6	4	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Direct/4	Direct/4	Belt/Variable	Belt/Variable
No. Motors	1	1	1	1
Motor HP	1/2	1/2	1/2	1/2
Motor RPM	1075	1075	1725	1725
Motor Frame Size	48	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	96 [2722]	96 [2722]	96 [2722]	96 [2722]
Weights				
Net Weight lbs. [kg]	543 [246]	543 [246]	543 [246]	543 [246]
Ship Weight lbs. [kg]	550 [249]	550 [249]	550 [249]	550 [249]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKPL- Series	A036CM08E	A036CM12E	A036DK08E	A036DK12E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	36,600 [10.72]	36,600 [10.72]	36,600 [10.72]	36,600 [10.72]
EER/SEER ²	12.05/14	12.05/14	12.05/14	12.05/14
Nominal CFM/ARI Rated CFM [L/s]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]
ARI Net Cooling Capacity Btu [kW]	35,800 [10.49]	35,800 [10.49]	35,800 [10.49]	35,800 [10.49]
Net Sensible Capacity Btu [kW]	27,000 [7.91]	27,000 [7.91]	27,000 [7.91]	27,000 [7.91]
Net Latent Capacity Btu [kW]	8,800 [2.58]	8,800 [2.58]	8,800 [2.58]	8,800 [2.58]
Net System Power kW	2.97	2.97	2.97	2.97
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	80,000 [23.44]	120,000 [35.16]	80,000 [23.44]	120,000 [35.16]
Heating Output Btu [kW]	64,800 [18.99]	97,200 [28.48]	64,800 [18.99]	97,200 [28.48]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	30-60 [16.7/33.3]	50-80 [27.8/44.4]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	4	6	4	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Direct/4	Direct/4
No. Motors	1	1	1	1
Motor HP	1/2	1/2	1/2	1/2
Motor RPM	1725	1725	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	96 [2722]	96 [2722]	96 [2722]	96 [2722]
Weights				
Net Weight lbs. [kg]	543 [246]	543 [246]	543 [246]	543 [246]
Ship Weight lbs. [kg]	550 [249]	550 [249]	550 [249]	550 [249]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKPL- Series	A036DL08E	A036DL12E	A036DM08E	A036DM12E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	36,600 [10.72]	36,600 [10.72]	36,600 [10.72]	36,600 [10.72]
EER/SEER ²	12.05/14	12.05/14	12.05/14	12.05/14
Nominal CFM/AHRI Rated CFM [L/s]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]
AHRI Net Cooling Capacity Btu [kW]	35,800 [10.49]	35,800 [10.49]	35,800 [10.49]	35,800 [10.49]
Net Sensible Capacity Btu [kW]	27,000 [7.91]	27,000 [7.91]	27,000 [7.91]	27,000 [7.91]
Net Latent Capacity Btu [kW]	8,800 [2.58]	8,800 [2.58]	8,800 [2.58]	8,800 [2.58]
Net System Power kW	2.97	2.97	2.97	2.97
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	80,000 [23.44]	120,000 [35.16]	80,000 [23.44]	120,000 [35.16]
Heating Output Btu [kW]	64,800 [18.99]	97,200 [28.48]	64,800 [18.99]	97,200 [28.48]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	30-60 [16.7/33.3]	50-80 [27.8/44.4]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	4	6	4	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Belt/Variable	Belt/Variable
No. Motors	1	1	1	1
Motor HP	1/2	1/2	1/2	1/2
Motor RPM	1725	1725	1725	1725
Motor Frame Size	48	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	96 [2722]	96 [2722]	96 [2722]	96 [2722]
Weights				
Net Weight lbs. [kg]	543 [246]	543 [246]	543 [246]	543 [246]
Ship Weight lbs. [kg]	550 [249]	550 [249]	550 [249]	550 [249]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKPL- Series	A036JK08E	A036JK08X	A036JK12E	A036JK12X
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	36,600 [10.72]	36,600 [10.72]	36,600 [10.72]	36,600 [10.72]
EER/SEER ²	12.05/14	12.05/14	12.05/14	12.05/14
Nominal CFM/AHRI Rated CFM [L/s]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]
AHRI Net Cooling Capacity Btu [kW]	35,800 [10.49]	35,800 [10.49]	35,800 [10.49]	35,800 [10.49]
Net Sensible Capacity Btu [kW]	27,000 [7.91]	27,000 [7.91]	27,000 [7.91]	27,000 [7.91]
Net Latent Capacity Btu [kW]	8,800 [2.58]	8,800 [2.58]	8,800 [2.58]	8,800 [2.58]
Net System Power kW	2.97	2.97	2.97	2.97
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	80,000 [23.44]	80,000 [23.44]	120,000 [35.16]	120,000 [35.16]
Heating Output Btu [kW]	62,500 [18.31]	62,500 [18.31]	94,500 [27.69]	94,500 [27.69]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	50-80 [27.8/44.4]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	4	4	6	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Direct/4	Direct/4	Direct/4	Direct/4
No. Motors	1	1	1	1
Motor HP	1/2	1/2	1/2	1/2
Motor RPM	1075	1075	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	96 [2722]	96 [2722]	96 [2722]	96 [2722]
Weights				
Net Weight lbs. [kg]	543 [246]	543 [246]	543 [246]	543 [246]
Ship Weight lbs. [kg]	550 [249]	550 [249]	550 [249]	550 [249]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKPL- Series	A042CK08E	A042CK12E	A042CL08E	A042CL12E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	43,000 [12.6]	43,000 [12.6]	43,000 [12.6]	43,000 [12.6]
EER/SEER ²	11.85/14	11.85/14	11.85/14	11.85/14
Nominal CFM/AHRI Rated CFM [L/s]	1400/1450 [661/684]	1400/1450 [661/684]	1400/1450 [661/684]	1400/1450 [661/684]
AHRI Net Cooling Capacity Btu [kW]	41,500 [12.16]	41,500 [12.16]	41,500 [12.16]	41,500 [12.16]
Net Sensible Capacity Btu [kW]	31,200 [9.14]	31,200 [9.14]	31,200 [9.14]	31,200 [9.14]
Net Latent Capacity Btu [kW]	10,300 [3.02]	10,300 [3.02]	10,300 [3.02]	10,300 [3.02]
Net System Power kW	3.5	3.5	3.5	3.5
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	80,000 [23.44]	120,000 [35.16]	80,000 [23.44]	120,000 [35.16]
Heating Output Btu [kW]	64,800 [18.99]	97,200 [28.48]	64,800 [18.99]	97,200 [28.48]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	30-60 [16.7/33.3]	50-80 [27.8/44.4]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	4	6	4	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1.53 / 22 [9]	1.53 / 22 [9]	1.53 / 22 [9]	1.53 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Direct/4	Direct/4	Belt/Variable	Belt/Variable
No. Motors	1	1	1	1
Motor HP	3/4	3/4	1/2	1/2
Motor RPM	1075	1075	1725	1725
Motor Frame Size	48	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	125 [3544]	125 [3544]	125 [3544]	125 [3544]
Weights				
Net Weight lbs. [kg]	570 [259]	579 [263]	570 [259]	579 [263]
Ship Weight lbs. [kg]	577 [262]	586 [266]	577 [262]	586 [266]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKPL- Series	A042CM08E	A042CM12E	A042DK08E	A042DK12E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	43,000 [12.6]	43,000 [12.6]	43,000 [12.6]	43,000 [12.6]
EER/SEER ²	11.85/14	11.85/14	11.85/14	11.85/14
Nominal CFM/AHRI Rated CFM [L/s]	1400/1450 [661/684]	1400/1450 [661/684]	1400/1450 [661/684]	1400/1450 [661/684]
AHRI Net Cooling Capacity Btu [kW]	41,500 [12.16]	41,500 [12.16]	41,500 [12.16]	41,500 [12.16]
Net Sensible Capacity Btu [kW]	31,200 [9.14]	31,200 [9.14]	31,200 [9.14]	31,200 [9.14]
Net Latent Capacity Btu [kW]	10,300 [3.02]	10,300 [3.02]	10,300 [3.02]	10,300 [3.02]
Net System Power kW	3.5	3.5	3.5	3.5
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	80,000 [23.44]	120,000 [35.16]	80,000 [23.44]	120,000 [35.16]
Heating Output Btu [kW]	64,800 [18.99]	97,200 [28.48]	64,800 [18.99]	97,200 [28.48]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	30-60 [16.7/33.3]	50-80 [27.8/44.4]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	4	6	4	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1.53 / 22 [9]	1.53 / 22 [9]	1.53 / 22 [9]	1.53 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Direct/4	Direct/4
No. Motors	1	1	1	1
Motor HP	1/2	1/2	3/4	3/4
Motor RPM	1725	1725	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	125 [3544]	125 [3544]	125 [3544]	125 [3544]
Weights				
Net Weight lbs. [kg]	570 [259]	570 [259]	570 [259]	579 [263]
Ship Weight lbs. [kg]	577 [262]	577 [262]	577 [262]	586 [266]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKPL- Series	A042DL08E	A042DL12E	A042DM08E	A042DM12E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	43,000 [12.6]	43,000 [12.6]	43,000 [12.6]	43,000 [12.6]
EER/SEER ²	11.85/14	11.85/14	11.85/14	11.85/14
Nominal CFM/ARI Rated CFM [L/s]	1400/1450 [661/684]	1400/1450 [661/684]	1400/1450 [661/684]	1400/1450 [661/684]
ARI Net Cooling Capacity Btu [kW]	41,500 [12.16]	41,500 [12.16]	41,500 [12.16]	41,500 [12.16]
Net Sensible Capacity Btu [kW]	31,200 [9.14]	31,200 [9.14]	31,200 [9.14]	31,200 [9.14]
Net Latent Capacity Btu [kW]	10,300 [3.02]	10,300 [3.02]	10,300 [3.02]	10,300 [3.02]
Net System Power kW	3.5	3.5	3.5	3.5
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	80,000 [23.44]	120,000 [35.16]	80,000 [23.44]	120,000 [35.16]
Heating Output Btu [kW]	64,800 [18.99]	97,200 [28.48]	64,800 [18.99]	97,200 [28.48]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	30-60 [16.7/33.3]	50-80 [27.8/44.4]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	4	6	4	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1.53 / 22 [9]	1.53 / 22 [9]	1.53 / 22 [9]	1.53 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Belt/Variable	Belt/Variable
No. Motors	1	1	1	1
Motor HP	1/2	1/2	1/2	1/2
Motor RPM	1725	1725	1725	1725
Motor Frame Size	48	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	125 [3544]	125 [3544]	125 [3544]	125 [3544]
Weights				
Net Weight lbs. [kg]	570 [259]	570 [259]	570 [259]	570 [259]
Ship Weight lbs. [kg]	577 [262]	577 [262]	577 [262]	577 [262]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKPL- Series	A042JK08E	A042JK08X	A042JK12E	A042JK12X
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	43,000 [12.6]	43,000 [12.6]	43,000 [12.6]	43,000 [12.6]
EER/SEER ²	11.85/14	11.85/14	11.85/14	11.85/14
Nominal CFM/AHRI Rated CFM [L/s]	1400/1450 [661/684]	1400/1450 [661/684]	1400/1450 [661/684]	1400/1450 [661/684]
AHRI Net Cooling Capacity Btu [kW]	41,500 [12.16]	41,500 [12.16]	41,500 [12.16]	41,500 [12.16]
Net Sensible Capacity Btu [kW]	31,200 [9.14]	31,200 [9.14]	31,200 [9.14]	31,200 [9.14]
Net Latent Capacity Btu [kW]	10,300 [3.02]	10,300 [3.02]	10,300 [3.02]	10,300 [3.02]
Net System Power kW	3.5	3.5	3.5	3.5
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	80,000 [23.44]	80,000 [23.44]	120,000 [35.16]	120,000 [35.16]
Heating Output Btu [kW]	62,500 [18.31]	62,500 [18.31]	94,500 [27.69]	94,500 [27.69]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	50-80 [27.8/44.4]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	4	4	6	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1.53 / 22 [9]	1.53 / 22 [9]	1.53 / 22 [9]	1.53 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Direct/4	Direct/4	Direct/4	Direct/4
No. Motors	1	1	1	1
Motor HP	3/4	3/4	3/4	3/4
Motor RPM	1075	1075	1725	1075
Motor Frame Size	48	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	125 [3544]	125 [3544]	125 [3544]	125 [3544]
Weights				
Net Weight lbs. [kg]	570 [259]	570 [259]	579 [263]	579 [263]
Ship Weight lbs. [kg]	577 [262]	577 [262]	586 [266]	586 [266]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKPL- Series	A048CK08E	A048CK10E	A048CK13E	A048CL08E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	50,500 [14.8]	50,500 [14.8]	50,500 [14.8]	50,500 [14.8]
EER/SEER ²	12.15/14	12.15/14	12.15/14	12.15/14
Nominal CFM/AHRI Rated CFM [L/s]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]
AHRI Net Cooling Capacity Btu [kW]	49,000 [14.36]	49,000 [14.36]	49,000 [14.36]	49,000 [14.36]
Net Sensible Capacity Btu [kW]	36,400 [10.67]	36,400 [10.67]	36,400 [10.67]	36,400 [10.67]
Net Latent Capacity Btu [kW]	12,600 [3.69]	12,600 [3.69]	12,600 [3.69]	12,600 [3.69]
Net System Power kW	4.03	4.03	4.03	4.03
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	80,000 [23.44]	100,000 [29.3]	135,000 [39.56]	80,000 [23.44]
Heating Output Btu [kW]	64,800 [18.99]	81,000 [23.73]	109,400 [32.05]	64,800 [18.99]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	40-70 [22.2/38.9]	50-80 [27.8/44.4]	30-60 [16.7/33.3]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	4	5	6	4
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Direct/4	Direct/4	Direct/4	Belt/Variable
No. Motors	1	1	1	1
Motor HP	3/4	3/4	3/4	1/2
Motor RPM	1075	1075	1075	1725
Motor Frame Size	48	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	165 [4678]	165 [4678]	165 [4678]	165 [4678]
Weights				
Net Weight lbs. [kg]	580 [263]	580 [263]	585 [265]	580 [263]
Ship Weight lbs. [kg]	587 [266]	587 [266]	592 [269]	587 [266]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKPL- Series	A048CL10E	A048CL13E	A048CM08E	A048CM10E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	50,500 [14.8]	50,500 [14.8]	50,500 [14.8]	50,500 [14.8]
EER/SEER ²	12.15/14	12.15/14	12.15/14	12.15/14
Nominal CFM/AHRI Rated CFM [L/s]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]
AHRI Net Cooling Capacity Btu [kW]	49,000 [14.36]	49,000 [14.36]	49,000 [14.36]	49,000 [14.36]
Net Sensible Capacity Btu [kW]	36,400 [10.67]	36,400 [10.67]	36,400 [10.67]	36,400 [10.67]
Net Latent Capacity Btu [kW]	12,600 [3.69]	12,600 [3.69]	12,600 [3.69]	12,600 [3.69]
Net System Power kW	4.03	4.03	4.03	4.03
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	100,000 [29.3]	135,000 [39.56]	80,000 [23.44]	100,000 [29.3]
Heating Output Btu [kW]	81,000 [23.73]	109,400 [32.05]	64,800 [18.99]	81,000 [23.73]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	30-60 [16.7/33.3]	30-60 [16.7/33.3]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	5	6	4	5
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Belt/Variable	Belt/Variable
No. Motors	1	1	1	1
Motor HP	1/2	1/2	3/4	3/4
Motor RPM	1725	1725	1725	1725
Motor Frame Size	48	48	56	56
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	165 [4678]	165 [4678]	165 [4678]	165 [4678]
Weights				
Net Weight lbs. [kg]	580 [263]	585 [265]	580 [263]	580 [263]
Ship Weight lbs. [kg]	587 [266]	592 [269]	587 [266]	587 [266]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKPL- Series	A048CM13E	A048DK08E	A048DK10E	A048DK13E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	50,500 [14.8]	50,500 [14.8]	50,500 [14.8]	50,500 [14.8]
EER/SEER ²	12.15/14	12.15/14	12.15/14	12.15/14
Nominal CFM/AHRI Rated CFM [L/s]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]
AHRI Net Cooling Capacity Btu [kW]	49,000 [14.36]	49,000 [14.36]	49,000 [14.36]	49,000 [14.36]
Net Sensible Capacity Btu [kW]	36,400 [10.67]	36,400 [10.67]	36,400 [10.67]	36,400 [10.67]
Net Latent Capacity Btu [kW]	12,600 [3.69]	12,600 [3.69]	12,600 [3.69]	12,600 [3.69]
Net System Power kW	4.03	4.03	4.03	4.03
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	135,000 [39.56]	80,000 [23.44]	100,000 [29.3]	135,000 [39.56]
Heating Output Btu [kW]	109,400 [32.05]	64,800 [18.99]	81,000 [23.73]	109,400 [32.05]
Temperature Rise Range °F [°C]	50-80 [27.8/44.4]	30-60 [16.7/33.3]	40-70 [22.2/38.9]	50-80 [27.8/44.4]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	6	4	5	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Direct/4	Direct/4	Direct/4
No. Motors	1	1	1	1
Motor HP	3/4	3/4	3/4	3/4
Motor RPM	1725	1075	1075	1075
Motor Frame Size	56	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	165 [4678]	165 [4678]	165 [4678]	165 [4678]
Weights				
Net Weight lbs. [kg]	580 [263]	580 [263]	580 [263]	585 [265]
Ship Weight lbs. [kg]	587 [266]	587 [266]	587 [266]	592 [269]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKPL- Series	A048DL08E	A048DL10E	A048DL13E	A048DM08E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	50,500 [14.8]	50,500 [14.8]	50,500 [14.8]	50,500 [14.8]
EER/SEER ²	12.15/14	12.15/14	12.15/14	12.15/14
Nominal CFM/ARI Rated CFM [L/s]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]
ARI Net Cooling Capacity Btu [kW]	49,000 [14.36]	49,000 [14.36]	49,000 [14.36]	49,000 [14.36]
Net Sensible Capacity Btu [kW]	36,400 [10.67]	36,400 [10.67]	36,400 [10.67]	36,400 [10.67]
Net Latent Capacity Btu [kW]	12,600 [3.69]	12,600 [3.69]	12,600 [3.69]	12,600 [3.69]
Net System Power kW	4.03	4.03	4.03	4.03
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	80,000 [23.44]	100,000 [29.3]	135,000 [39.56]	80,000 [23.44]
Heating Output Btu [kW]	64,800 [18.99]	81,000 [23.73]	109,400 [32.05]	64,800 [18.99]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	30-60 [16.7/33.3]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	4	5	6	4
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Belt/Variable	Belt/Variable
No. Motors	1	1	1	1
Motor HP	1/2	1/2	1/2	3/4
Motor RPM	1725	1725	1725	1725
Motor Frame Size	48	48	48	56
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	165 [4678]	165 [4678]	165 [4678]	165 [4678]
Weights				
Net Weight lbs. [kg]	580 [263]	580 [263]	585 [265]	580 [263]
Ship Weight lbs. [kg]	587 [266]	587 [266]	592 [269]	587 [266]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKPL- Series	A048DM10E	A048DM13E	A048JK08E	A048JK08X
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	50,500 [14.8]	50,500 [14.8]	50,500 [14.8]	50,500 [14.8]
EER/SEER ²	12.15/14	12.15/14	12.15/14	12.15/14
Nominal CFM/AHRI Rated CFM [L/s]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]
AHRI Net Cooling Capacity Btu [kW]	49,000 [14.36]	49,000 [14.36]	49,000 [14.36]	49,000 [14.36]
Net Sensible Capacity Btu [kW]	36,400 [10.67]	36,400 [10.67]	36,400 [10.67]	36,400 [10.67]
Net Latent Capacity Btu [kW]	12,600 [3.69]	12,600 [3.69]	12,600 [3.69]	12,600 [3.69]
Net System Power kW	4.03	4.03	4.03	4.03
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	100,000 [29.3]	135,000 [39.56]	80,000 [23.44]	80,000 [23.44]
Heating Output Btu [kW]	81,000 [23.73]	109,400 [32.05]	62,500 [18.31]	62,500 [18.31]
Temperature Rise Range °F [°C]	30-60 [16.7/33.3]	50-80 [27.8/44.4]	30-60 [16.7/33.3]	30-60 [16.7/33.3]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	5	6	4	4
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Direct/4	Direct/4
No. Motors	1	1	1	1
Motor HP	3/4	3/4	3/4	3/4
Motor RPM	1725	1725	1075	1075
Motor Frame Size	56	56	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	165 [4678]	165 [4678]	165 [4678]	165 [4678]
Weights				
Net Weight lbs. [kg]	580 [263]	580 [263]	580 [263]	580 [263]
Ship Weight lbs. [kg]	587 [266]	587 [266]	587 [266]	587 [266]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKPL- Series	A048JK10E	A048JK10X	A048JK13E	A048JK13X
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	50,500 [14.8]	50,500 [14.8]	50,500 [14.8]	50,500 [14.8]
EER/SEER ²	12.15/14	12.15/14	12.15/14	12.15/14
Nominal CFM/AHRI Rated CFM [L/s]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]
AHRI Net Cooling Capacity Btu [kW]	49,000 [14.36]	49,000 [14.36]	49,000 [14.36]	49,000 [14.36]
Net Sensible Capacity Btu [kW]	36,400 [10.67]	36,400 [10.67]	36,400 [10.67]	36,400 [10.67]
Net Latent Capacity Btu [kW]	12,600 [3.69]	12,600 [3.69]	12,600 [3.69]	12,600 [3.69]
Net System Power kW	4.03	4.03	4.03	4.03
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	100,000 [29.3]	100,000 [29.3]	135,000 [39.56]	135,000 [39.56]
Heating Output Btu [kW]	78,500 [23]	78,500 [23]	106,500 [31.2]	106,500 [31.2]
Temperature Rise Range °F [°C]	40-70 [22.2/38.9]	40-70 [22.2/38.9]	50-80 [27.8/44.4]	50-80 [27.8/44.4]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	5	5	6	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	78	78	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Direct/4	Direct/4	Direct/4	Direct/4
No. Motors	1	1	1	1
Motor HP	3/4	3/4	3/4	3/4
Motor RPM	1075	1075	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	165 [4678]	165 [4678]	165 [4678]	165 [4678]
Weights				
Net Weight lbs. [kg]	580 [263]	580 [263]	585 [265]	585 [265]
Ship Weight lbs. [kg]	587 [266]	587 [266]	592 [269]	592 [269]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKPL- Series	A060CK10E	A060CK13E	A060CL10E	A060CL13E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	61,500 [18.02]	61,500 [18.02]	61,500 [18.02]	61,500 [18.02]
EER/SEER ²	12.25/14	12.25/14	12.25/14	12.25/14
Nominal CFM/AHRI Rated CFM [L/s]	2000/1850 [944/873]	2000/1850 [944/873]	2000/1850 [944/873]	2000/1850 [944/873]
AHRI Net Cooling Capacity Btu [kW]	60,000 [17.58]	60,000 [17.58]	60,000 [17.58]	60,000 [17.58]
Net Sensible Capacity Btu [kW]	42,500 [12.45]	42,500 [12.45]	42,500 [12.45]	42,500 [12.45]
Net Latent Capacity Btu [kW]	17,500 [5.13]	17,500 [5.13]	17,500 [5.13]	17,500 [5.13]
Net System Power kW	4.9	4.9	4.9	4.9
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	100,000 [29.3]	135,000 [39.56]	100,000 [29.3]	135,000 [39.56]
Heating Output Btu [kW]	81,000 [23.73]	109,400 [32.05]	81,000 [23.73]	109,400 [32.05]
Temperature Rise Range °F [°C]	25-55 [13.9/30.6]	40-70 [22.2/38.9]	25-55 [13.9/30.6]	40-70 [22.2/38.9]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	5	6	5	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	83	83	83	83
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3930 [1855]	3930 [1855]	3930 [1855]	3930 [1855]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/11x10 [279.4x254]	1/11x10 [279.4x254]
Drive Type/No. Speeds	Direct/3	Direct/3	Belt/Variable	Belt/Variable
No. Motors	1	1	1	1
Motor HP	1	1	3/4	3/4
Motor RPM	1075	1075	1725	1725
Motor Frame Size	48	48	56	56
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	147 [4167]	147 [4167]	147 [4167]	147 [4167]
Weights				
Net Weight lbs. [kg]	590 [268]	597 [271]	590 [268]	597 [271]
Ship Weight lbs. [kg]	597 [271]	604 [274]	597 [271]	604 [274]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKPL- Series	A060CM10E	A060CM13E	A060DK10E	A060DK13E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	61,500 [18.02]	61,500 [18.02]	61,500 [18.02]	61,500 [18.02]
EER/SEER ²	12.25/14	12.25/14	12.25/14	12.25/14
Nominal CFM/AHRI Rated CFM [L/s]	2000/1850 [944/873]	2000/1850 [944/873]	2000/1850 [944/873]	2000/1850 [944/873]
AHRI Net Cooling Capacity Btu [kW]	60,000 [17.58]	60,000 [17.58]	60,000 [17.58]	60,000 [17.58]
Net Sensible Capacity Btu [kW]	42,500 [12.45]	42,500 [12.45]	42,500 [12.45]	42,500 [12.45]
Net Latent Capacity Btu [kW]	17,500 [5.13]	17,500 [5.13]	17,500 [5.13]	17,500 [5.13]
Net System Power kW	4.9	4.9	4.9	4.9
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	100,000 [29.3]	135,000 [39.56]	100,000 [29.3]	135,000 [39.56]
Heating Output Btu [kW]	81,000 [23.73]	109,400 [32.05]	81,000 [23.73]	109,400 [32.05]
Temperature Rise Range °F [°C]	25-55 [13.9/30.6]	40-70 [22.2/38.9]	25-55 [13.9/30.6]	40-70 [22.2/38.9]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	5	6	5	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	83	83	83	83
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3930 [1855]	3930 [1855]	3930 [1855]	3930 [1855]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/11x10 [279.4x254]	1/11x10 [279.4x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Direct/3	Direct/3
No. Motors	1	1	1	1
Motor HP	1	1	1	1
Motor RPM	1725	1725	1075	1075
Motor Frame Size	56	56	48	48
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	147 [4167]	147 [4167]	147 [4167]	147 [4167]
Weights				
Net Weight lbs. [kg]	590 [268]	590 [268]	590 [268]	597 [271]
Ship Weight lbs. [kg]	597 [271]	597 [271]	597 [271]	604 [274]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKPL- Series	A060DL10E	A060DL13E	A060DM10E	A060DM13E
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	61,500 [18.02]	61,500 [18.02]	61,500 [18.02]	61,500 [18.02]
EER/SEER ²	12.25/14	12.25/14	12.25/14	12.25/14
Nominal CFM/AHRI Rated CFM [L/s]	2000/1850 [944/873]	2000/1850 [944/873]	2000/1850 [944/873]	2000/1850 [944/873]
AHRI Net Cooling Capacity Btu [kW]	60,000 [17.58]	60,000 [17.58]	60,000 [17.58]	60,000 [17.58]
Net Sensible Capacity Btu [kW]	42,500 [12.45]	42,500 [12.45]	42,500 [12.45]	42,500 [12.45]
Net Latent Capacity Btu [kW]	17,500 [5.13]	17,500 [5.13]	17,500 [5.13]	17,500 [5.13]
Net System Power kW	4.9	4.9	4.9	4.9
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	100,000 [29.3]	135,000 [39.56]	100,000 [29.3]	135,000 [39.56]
Heating Output Btu [kW]	81,000 [23.73]	109,400 [32.05]	81,000 [23.73]	109,400 [32.05]
Temperature Rise Range °F [°C]	25-55 [13.9/30.6]	40-70 [22.2/38.9]	25-55 [13.9/30.6]	40-70 [22.2/38.9]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	5	6	5	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴	83	83	83	83
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3930 [1855]	3930 [1855]	3930 [1855]	3930 [1855]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/11x10 [279.4x254]	1/11x10 [279.4x254]	1/11x10 [279.4x254]	1/11x10 [279.4x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Belt/Variable	Belt/Variable
No. Motors	1	1	1	1
Motor HP	3/4	3/4	1	1
Motor RPM	1725	1725	1725	1725
Motor Frame Size	56	56	56	56
Filter—Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	147 [4167]	147 [4167]	147 [4167]	147 [4167]
Weights				
Net Weight lbs. [kg]	590 [268]	597 [271]	590 [268]	590 [268]
Ship Weight lbs. [kg]	597 [271]	604 [274]	597 [271]	597 [271]

See Page 47 for Notes.

[] Designates Metric Conversions

NOM. SIZES 3-5 TONS [10.6-17.6 kW]

Model RKPL- Series	A060JK10E	A060JK10X	A060JK13E	A060JK13X
Cooling Performance¹				
Gross Cooling Capacity Btu [kW]	61,500 [18.02]	61,500 [18.02]	61,500 [18.02]	61,500 [18.02]
EER/SEER ²	12.25/14	12.25/14	12.25/14	12.25/14
Nominal CFM/AHRI Rated CFM [L/s]	2000/1850 [944/873]	2000/1850 [944/873]	2000/1850 [944/873]	2000/1850 [944/873]
AHRI Net Cooling Capacity Btu [kW]	60,000 [17.58]	60,000 [17.58]	60,000 [17.58]	60,000 [17.58]
Net Sensible Capacity Btu [kW]	42,500 [12.45]	42,500 [12.45]	42,500 [12.45]	42,500 [12.45]
Net Latent Capacity Btu [kW]	17,500 [5.13]	17,500 [5.13]	17,500 [5.13]	17,500 [5.13]
Net System Power kW	4.9	4.9	4.9	4.9
Heating Performance (Package Gas/Electric)³				
Heating Input Btu [kW]	100,000 [29.3]	100,000 [29.3]	135,000 [39.56]	135,000 [39.56]
Heating Output Btu [kW]	78,500 [23]	78,500 [23]	106,500 [31.2]	106,500 [31.2]
Temperature Rise Range °F [°C]	25-55 [13.9/30.6]	25-55 [13.9/30.6]	40-70 [22.2/38.9]	40-70 [22.2/38.9]
AFUE %	80	80	80	80
Steady State Efficiency (%)	81	81	81	81
No. Burners	5	5	6	6
No. Stages	1	1	1	1
Gas Connection Pipe Size in. [mm]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]	0.5 [12.7]
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁴				
	83	83	83	83
Outdoor Coil—Fin Type				
Tube Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type				
Tube Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type				
Propeller	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3930 [1855]	3930 [1855]	3930 [1855]	3930 [1855]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type				
FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Direct/3	Direct/3	Direct/3	Direct/3
No. Motors	1	1	1	1
Motor HP	1	1	1	1
Motor RPM	1075	1075	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type				
Disposable	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(No.) Size Recommended in. [mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]				
	147 [4167]	147 [4167]	147 [4167]	147 [4167]
Weights				
Net Weight lbs. [kg]	590 [268]	590 [268]	597 [271]	597 [271]
Ship Weight lbs. [kg]	597 [271]	597 [271]	604 [274]	604 [274]

See Page 47 for Notes.

[] Designates Metric Conversions

NOTES:

1. Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to $\pm 20\%$ of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
2. EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
3. Heating Performance limit settings and rating data were established and approved under laboratory test conditions using American National Standard Institute standards. Ratings shown are for elevations up to 2000 feet. For elevations above 2000 feet, ratings should be reduced at the rate of 4% for each 1000 feet above sea level.
4. Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.



GROSS SYSTEMS PERFORMANCE DATA—RKNL-A036

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		1500 [707.9]	1200 [566.3]	900 [424.8]	1500 [707.9]	1200 [566.3]	900 [424.8]	1500 [707.9]	1200 [566.3]	900 [424.8]	
DR ①		.16	.12	.06	.16	.12	.06	.16	.12	.06	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	46.6 [13.66] 28.3 [8.29] 2.1	44.6 [13.07] 25.3 [7.41] 2.1	42.5 [12.46] 22.4 [6.56] 2.0	43.2 [12.66] 33.4 [9.79] 2.2	41.4 [12.13] 29.9 [8.76] 2.1	39.5 [11.58] 26.4 [7.74] 2.1	40.2 [11.78] 38.6 [11.31] 2.2	38.4 [11.25] 34.6 [10.14] 2.1	36.7 [10.76] 30.6 [8.97] 2.1
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	45.4 [13.31] 27.7 [8.12] 2.3	43.5 [12.75] 24.8 [7.27] 2.2	41.5 [12.16] 21.9 [6.42] 2.2	42.1 [12.34] 32.8 [9.61] 2.3	40.3 [11.81] 29.4 [8.62] 2.3	38.4 [11.25] 25.9 [7.59] 2.2	39.0 [11.43] 38.0 [11.14] 2.3	37.3 [10.93] 34.0 [9.96] 2.3	35.6 [10.43] 30.1 [8.82] 2.2
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	44.3 [12.98] 27.1 [7.94] 2.4	42.3 [12.40] 24.2 [7.09] 2.3	40.4 [11.84] 21.4 [6.27] 2.3	40.9 [11.99] 32.2 [9.44] 2.4	39.2 [11.49] 28.8 [8.44] 2.4	37.4 [10.96] 25.4 [7.44] 2.3	37.9 [11.11] 37.4 [10.96] 2.5	36.2 [10.61] 33.5 [9.82] 2.4	34.6 [10.14] 29.6 [8.67] 2.4
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	43.1 [12.63] 26.4 [7.74] 2.5	41.2 [12.07] 23.7 [6.95] 2.5	39.3 [11.52] 20.9 [6.13] 2.4	39.8 [11.66] 31.5 [9.23] 2.6	38.0 [11.14] 28.3 [8.29] 2.5	36.3 [10.64] 25.0 [7.33] 2.5	36.7 [10.76] 36.7 [10.76] 2.6	35.1 [10.29] 32.9 [9.64] 2.5	33.5 [9.82] 29.1 [8.53] 2.5
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	41.9 [12.28] 25.8 [7.56] 2.7	40.1 [11.75] 23.1 [6.77] 2.6	38.3 [11.22] 20.4 [5.98] 2.6	38.6 [11.31] 30.9 [9.06] 2.7	36.9 [10.81] 27.7 [8.12] 2.7	35.2 [10.32] 24.5 [7.18] 2.6	35.5 [10.40] 35.5 [10.40] 2.7	33.9 [9.94] 32.4 [9.50] 2.7	32.4 [9.50] 28.6 [8.38] 2.6
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	40.7 [11.93] 25.2 [7.39] 2.8	38.9 [11.40] 22.5 [6.59] 2.8	37.1 [10.87] 19.9 [5.83] 2.7	37.3 [10.93] 30.3 [8.88] 2.9	35.7 [10.46] 27.1 [7.94] 2.8	34.1 [9.99] 23.9 [7.00] 2.7	34.3 [10.05] 34.3 [10.05] 2.9	32.8 [9.61] 31.8 [9.32] 2.8	31.3 [9.17] 28.1 [8.24] 2.8
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	39.4 [11.55] 24.5 [7.18] 2.9	37.7 [11.05] 21.9 [6.42] 2.9	36.0 [10.55] 19.4 [5.69] 2.8	36.1 [10.58] 29.6 [8.67] 3.0	34.5 [10.11] 26.5 [7.77] 2.9	32.9 [9.64] 23.4 [6.86] 2.9	33.0 [9.67] 33.0 [9.67] 3.0	31.6 [9.26] 31.2 [9.14] 2.9	30.1 [8.82] 27.5 [8.06] 2.9
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	38.1 [11.17] 23.7 [6.95] 3.1	36.5 [10.70] 21.3 [6.24] 3.0	34.8 [10.20] 18.8 [5.51] 3.0	34.8 [10.20] 28.9 [8.47] 3.1	33.3 [9.76] 25.8 [7.56] 3.1	31.8 [9.32] 22.8 [6.68] 3.0	31.7 [9.29] 31.7 [9.29] 3.1	30.3 [8.88] 30.3 [8.88] 3.1	29.0 [8.50] 26.9 [7.88] 3.0
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	36.8 [10.79] 23.0 [6.74] 3.2	35.2 [10.32] 20.6 [6.04] 3.2	33.6 [9.85] 18.2 [5.33] 3.1	33.5 [9.82] 28.1 [8.24] 3.3	32.0 [9.38] 25.1 [7.36] 3.2	30.6 [8.97] 22.2 [6.51] 3.1	30.4 [8.91] 30.4 [8.91] 3.3	29.1 [8.53] 29.1 [8.53] 3.2	27.7 [8.12] 26.3 [7.71] 3.1

GROSS SYSTEMS PERFORMANCE DATA—RKNL-A042

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		1810 [854.2]	1450 [684.3]	1090 [514.4]	1810 [854.2]	1450 [684.3]	1090 [514.4]	1810 [854.2]	1450 [684.3]	1090 [514.4]	
DR ①		.23	.2	.15	.23	.2	.15	.23	.2	.15	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	52.9 [15.50] 32.9 [9.64] 2.5	50.6 [14.83] 29.4 [8.62] 2.5	48.3 [14.16] 26.0 [7.62] 2.4	49.8 [14.59] 39.1 [11.46] 2.5	47.6 [13.95] 35.0 [10.26] 2.5	45.5 [13.33] 30.9 [9.06] 2.4	47.4 [13.89] 45.3 [13.28] 2.5	45.3 [13.28] 40.6 [11.90] 2.5	43.3 [12.69] 35.9 [10.52] 2.4
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	51.5 [15.09] 32.1 [9.41] 2.7	49.3 [14.45] 28.7 [8.41] 2.6	47.0 [13.77] 25.4 [7.44] 2.6	48.5 [14.21] 38.3 [11.22] 2.7	46.3 [13.57] 34.3 [10.05] 2.6	44.2 [12.95] 30.3 [8.88] 2.6	46.0 [13.48] 44.8 [13.13] 2.7	44.0 [12.90] 39.9 [11.69] 2.6	42.0 [12.31] 35.3 [10.35] 2.6
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	50.1 [14.68] 31.3 [9.17] 2.8	48.0 [14.07] 28.1 [8.24] 2.8	45.8 [13.42] 24.8 [7.27] 2.7	47.1 [13.80] 37.6 [11.02] 2.8	45.0 [13.19] 33.6 [9.85] 2.8	43.0 [12.60] 29.7 [8.70] 2.7	44.7 [13.10] 44.0 [12.90] 2.8	42.7 [12.51] 39.3 [11.52] 2.8	40.8 [11.96] 34.7 [10.17] 2.7
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	48.7 [14.27] 30.7 [9.00] 3.0	46.6 [13.66] 27.4 [8.03] 2.9	44.5 [13.04] 24.2 [7.09] 2.9	45.7 [13.39] 36.9 [10.81] 3.0	43.7 [12.81] 33.0 [9.67] 2.9	41.7 [12.22] 29.2 [8.56] 2.9	43.2 [12.66] 43.0 [12.60] 3.0	41.4 [12.13] 38.7 [11.34] 2.9	39.5 [11.58] 34.2 [10.02] 2.9
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	47.3 [13.86] 30.0 [8.79] 3.2	45.2 [13.25] 26.8 [7.85] 3.1	43.2 [12.66] 23.7 [6.95] 3.0	44.2 [12.95] 36.2 [10.61] 3.2	42.3 [12.40] 32.4 [9.50] 3.1	40.4 [11.84] 28.6 [8.38] 3.0	41.8 [12.25] 41.8 [12.25] 3.2	40.0 [11.72] 38.0 [11.14] 3.1	38.2 [11.20] 33.6 [9.85] 3.0
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	45.8 [13.42] 29.2 [8.56] 3.3	43.8 [12.84] 26.2 [7.68] 3.3	41.8 [12.25] 23.1 [6.77] 3.2	42.7 [12.51] 35.4 [10.37] 3.3	40.9 [11.99] 31.7 [9.29] 3.2	39.0 [11.43] 28.0 [8.21] 3.2	40.3 [11.81] 40.3 [11.81] 3.3	38.6 [11.31] 37.4 [10.96] 3.2	36.8 [10.79] 33.0 [9.67] 3.2
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	44.3 [12.98] 28.5 [8.35] 3.5	42.3 [12.40] 25.5 [7.47] 3.4	40.4 [11.84] 22.5 [6.59] 3.3	41.2 [12.07] 34.7 [10.17] 3.5	39.4 [11.55] 31.0 [9.09] 3.4	37.6 [11.02] 27.4 [8.03] 3.3	38.8 [11.37] 38.8 [11.37] 3.5	37.1 [10.87] 36.7 [10.76] 3.4	35.4 [10.37] 32.4 [9.50] 3.3
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	42.7 [12.51] 27.6 [8.09] 3.6	40.8 [11.96] 24.7 [7.24] 3.6	39.0 [11.43] 21.8 [6.39] 3.5	39.6 [11.61] 33.8 [9.91] 3.6	37.9 [11.11] 30.3 [8.88] 3.6	36.2 [10.61] 26.7 [7.83] 3.5	37.2 [10.90] 37.2 [10.90] 3.6	35.6 [10.43] 35.6 [10.43] 3.6	34.0 [9.96] 31.7 [9.29] 3.5
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	41.1 [12.05] 26.6 [7.80] 3.8	39.3 [11.52] 23.9 [7.00] 3.7	37.5 [10.99] 21.1 [6.18] 3.6	38.0 [11.14] 32.9 [9.64] 3.8	36.3 [10.64] 29.4 [8.62] 3.7	34.7 [10.17] 26.0 [7.62] 3.6	35.6 [10.43] 35.6 [10.43] 3.8	34.0 [9.96] 34.0 [9.96] 3.7	32.5 [9.52] 31.0 [9.09] 3.6

DR —Depression ratio
dbE —Entering air dry bulb
wbE —Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 - DR) x (dbE - 80)].

[] Designates Metric Conversions





GROSS SYSTEMS PERFORMANCE DATA—RKNL-A048

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		2000 [943.8]	1600 [755.1]	1200 [566.3]	2000 [943.8]	1600 [755.1]	1200 [566.3]	2000 [943.8]	1600 [755.1]	1200 [566.3]	
DR ①		.21	.18	.14	.21	.18	.14	.21	.18	.14	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	63.8 [18.70] 38.9 [11.40] 2.9	61.1 [17.91] 34.9 [10.23] 2.8	58.3 [17.09] 30.8 [9.03] 2.8	59.4 [17.41] 45.9 [13.45] 2.9	56.9 [16.68] 41.1 [12.05] 2.9	54.3 [15.91] 36.3 [10.64] 2.8	54.4 [15.94] 53.0 [15.53] 2.9	52.0 [15.24] 47.5 [13.92] 2.8	49.6 [14.54] 42.0 [12.31] 2.7
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	62.0 [18.17] 38.0 [11.14] 3.1	59.3 [17.38] 34.0 [9.96] 3.0	56.6 [16.59] 30.0 [8.79] 3.0	57.6 [16.88] 44.9 [13.16] 3.1	55.1 [16.15] 40.2 [11.78] 3.0	52.6 [15.42] 35.5 [10.40] 3.0	52.5 [15.39] 52.1 [15.27] 3.1	50.3 [14.74] 46.6 [13.66] 3.0	48.0 [14.07] 41.2 [12.07] 2.9
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	60.2 [17.64] 37.0 [10.84] 3.3	57.6 [16.88] 33.1 [9.70] 3.2	55.0 [16.12] 29.2 [8.56] 3.1	55.8 [16.35] 43.9 [12.87] 3.3	53.4 [15.65] 39.3 [11.52] 3.2	50.9 [14.92] 34.7 [10.17] 3.2	50.7 [14.86] 50.7 [14.86] 3.3	48.5 [14.21] 45.7 [13.39] 3.2	46.3 [13.57] 40.4 [11.84] 3.1
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	58.4 [17.12] 36.0 [10.55] 3.5	55.9 [16.38] 32.2 [9.44] 3.4	53.3 [15.62] 28.4 [8.32] 3.3	54.0 [15.83] 42.9 [12.57] 3.5	51.7 [15.15] 38.4 [11.25] 3.4	49.3 [14.45] 34.0 [9.96] 3.4	48.9 [14.33] 48.9 [14.33] 3.4	46.8 [13.72] 44.8 [13.13] 3.4	44.7 [13.10] 39.6 [11.61] 3.3
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	56.6 [16.59] 35.0 [10.26] 3.7	54.2 [15.88] 31.3 [9.17] 3.6	51.7 [15.15] 27.7 [8.12] 3.5	52.2 [15.30] 42.0 [12.31] 3.7	50.0 [14.65] 37.6 [11.02] 3.6	47.7 [13.98] 33.2 [9.73] 3.5	47.2 [13.83] 47.2 [13.83] 3.6	45.1 [13.22] 44.1 [12.92] 3.6	43.1 [12.63] 38.8 [11.37] 3.5
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	54.9 [16.09] 34.1 [9.99] 3.9	52.6 [15.42] 30.5 [8.94] 3.8	50.2 [14.71] 26.9 [7.88] 3.7	50.5 [14.80] 41.0 [12.02] 3.9	48.4 [14.18] 36.7 [10.76] 3.8	46.2 [13.54] 32.5 [9.52] 3.7	45.5 [13.33] 45.5 [13.33] 3.8	43.5 [12.75] 43.1 [12.63] 3.8	41.5 [12.16] 38.1 [11.17] 3.7
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	53.3 [15.62] 33.2 [9.73] 4.0	51.0 [14.95] 29.7 [8.70] 4.0	48.7 [14.27] 26.3 [7.71] 3.9	48.9 [14.33] 40.2 [11.78] 4.1	46.8 [13.72] 36.0 [10.55] 4.0	44.7 [13.10] 31.8 [9.32] 3.9	43.9 [12.87] 43.9 [12.87] 4.0	42.0 [12.31] 42.0 [12.31] 3.9	40.1 [11.75] 37.4 [10.96] 3.9
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	51.9 [15.21] 32.4 [9.50] 4.2	49.6 [14.54] 29.1 [8.53] 4.2	47.4 [13.89] 25.7 [7.53] 4.1	47.5 [13.92] 39.4 [11.55] 4.3	45.4 [13.31] 35.3 [10.35] 4.2	43.3 [12.69] 31.2 [9.14] 4.1	42.4 [12.43] 42.4 [12.43] 4.2	40.5 [11.87] 40.5 [11.87] 4.1	38.7 [11.34] 36.8 [10.79] 4.1
115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	50.5 [14.80] 31.8 [9.32] 4.4	48.3 [14.16] 28.5 [8.35] 4.3	46.1 [13.51] 25.1 [7.36] 4.3	46.1 [13.51] 38.8 [11.37] 4.5	44.1 [12.92] 34.7 [10.17] 4.4	42.1 [12.34] 30.7 [9.00] 4.3	41.0 [12.02] 41.0 [12.02] 4.4	39.3 [11.52] 39.3 [11.52] 4.3	37.5 [10.99] 36.3 [10.64] 4.2	

GROSS SYSTEMS PERFORMANCE DATA—RKNL-A060

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		2380 [1123.2]	1900 [896.7]	1420 [670.1]	2380 [1123.2]	1900 [896.7]	1420 [670.1]	2380 [1123.2]	1900 [896.7]	1420 [670.1]	
DR ①		.20	.17	.12	.20	.17	.12	.20	.17	.12	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	78.2 [22.92] 46.4 [13.60] 3.9	74.8 [21.92] 41.5 [12.16] 3.8	71.4 [20.93] 36.7 [10.76] 3.7	72.4 [21.22] 53.7 [15.74] 3.9	69.2 [20.28] 48.1 [14.10] 3.8	66.1 [19.37] 42.5 [12.46] 3.7	70.5 [20.66] 61.8 [18.11] 3.8	67.4 [19.75] 55.3 [16.21] 3.7	64.3 [18.84] 48.9 [14.33] 3.6
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	76.2 [22.33] 45.5 [13.33] 4.1	72.9 [21.36] 40.7 [11.93] 4.0	69.6 [20.40] 36.0 [10.55] 3.9	70.4 [20.63] 52.8 [15.47] 4.1	67.3 [19.72] 47.2 [13.83] 4.0	64.2 [18.82] 41.7 [12.22] 3.9	68.4 [20.05] 60.9 [17.85] 4.0	65.4 [19.17] 54.5 [15.97] 3.9	62.5 [18.32] 48.1 [14.10] 3.8
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	74.1 [21.72] 44.4 [13.01] 4.3	70.8 [20.75] 39.7 [11.63] 4.3	67.6 [19.81] 35.1 [10.29] 4.2	68.2 [19.99] 51.6 [15.12] 4.4	65.3 [19.14] 46.2 [13.54] 4.3	62.3 [18.26] 40.8 [11.96] 4.2	66.3 [19.43] 59.7 [17.50] 4.2	63.4 [18.58] 53.5 [15.68] 4.2	60.5 [17.73] 47.3 [13.86] 4.1
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	71.9 [21.07] 43.1 [12.63] 4.6	68.7 [20.13] 38.6 [11.31] 4.5	65.6 [19.23] 34.1 [9.99] 4.4	66.0 [19.34] 50.4 [14.77] 4.6	63.1 [18.49] 45.1 [13.22] 4.5	60.3 [17.67] 39.9 [11.69] 4.4	64.1 [18.79] 58.5 [17.14] 4.5	61.3 [17.97] 52.4 [15.36] 4.4	58.5 [17.14] 46.3 [13.57] 4.3
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	69.6 [20.40] 41.8 [12.25] 4.8	66.6 [19.52] 37.5 [10.99] 4.7	63.6 [18.64] 33.1 [9.70] 4.6	63.8 [18.70] 49.1 [14.39] 4.8	61.0 [17.88] 44.0 [12.90] 4.7	58.2 [17.06] 38.9 [11.40] 4.6	61.8 [18.11] 57.2 [16.76] 4.7	59.1 [17.32] 51.2 [15.01] 4.6	56.4 [16.53] 45.3 [13.28] 4.5
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	67.4 [19.75] 40.6 [11.90] 5.1	64.4 [18.87] 36.3 [10.64] 5.0	61.5 [18.02] 32.1 [9.41] 4.9	61.5 [18.02] 47.8 [14.01] 5.1	58.9 [17.26] 42.8 [12.54] 5.0	56.2 [16.47] 37.8 [11.08] 4.9	59.6 [17.47] 55.9 [16.38] 5.0	57.0 [16.71] 50.1 [14.68] 4.9	54.4 [15.94] 44.3 [12.98] 4.8
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	65.2 [19.11] 39.3 [11.52] 5.3	62.4 [18.29] 35.2 [10.32] 5.2	59.5 [17.44] 31.1 [9.11] 5.1	59.3 [17.38] 46.6 [13.66] 5.3	56.8 [16.65] 41.8 [12.25] 5.2	54.2 [15.88] 36.9 [10.81] 5.1	57.4 [16.82] 54.7 [16.03] 5.2	54.9 [16.09] 49.0 [14.36] 5.1	52.4 [15.36] 43.3 [12.69] 5.0
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	63.1 [18.49] 38.3 [11.22] 5.6	60.4 [17.70] 34.3 [10.05] 5.4	57.6 [16.88] 30.3 [8.88] 5.3	57.3 [16.79] 45.5 [13.33] 5.6	54.8 [16.06] 40.8 [11.96] 5.5	52.3 [15.33] 36.0 [10.55] 5.3	55.3 [16.21] 53.6 [15.71] 5.5	52.9 [15.50] 48.0 [14.07] 5.3	50.5 [14.80] 42.4 [12.43] 5.2
115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	61.1 [17.91] 37.4 [10.96] 5.8	58.5 [17.14] 33.5 [9.82] 5.7	55.8 [16.35] 29.6 [8.67] 5.6	55.3 [16.21] 44.6 [13.07] 5.8	52.9 [15.50] 40.0 [11.72] 5.7	50.5 [14.80] 35.3 [10.35] 5.6	53.3 [15.62] 52.7 [15.44] 5.7	51.0 [14.95] 47.2 [13.83] 5.6	48.7 [14.27] 41.7 [12.22] 5.5	

DR —Depression ratio
dbE —Entering air dry bulb
wbE —Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions





GROSS SYSTEMS PERFORMANCE DATA—RKPL-A036

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
		wbE	71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
		CFM [L/s]	1500 [707.9]	1200 [566.3]	900 [424.8]	1500 [707.9]	1200 [566.3]	900 [424.8]	1500 [707.9]	1200 [566.3]	900 [424.8]
		DR ②	.16	.12	.06	.16	.12	.06	.16	.12	.06
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	46.9 [13.75] 28.0 [8.21] 2.1	44.8 [13.13] 25.0 [7.33] 2.0	42.8 [12.54] 22.1 [6.48] 2.0	43.3 [12.69] 33.3 [9.76] 2.2	41.4 [12.13] 29.9 [8.76] 2.1	39.5 [11.58] 26.4 [7.74] 2.1	40.5 [11.87] 38.2 [11.20] 2.1	38.7 [11.34] 34.3 [10.05] 2.1	36.9 [10.81] 30.3 [8.88] 2.0
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	45.8 [13.42] 27.7 [8.12] 2.2	43.8 [12.84] 24.8 [7.27] 2.2	41.8 [12.25] 21.9 [6.42] 2.1	42.2 [12.37] 33.1 [9.70] 2.3	40.3 [11.81] 29.6 [8.67] 2.3	38.5 [11.28] 26.1 [7.65] 2.2	39.3 [11.52] 38.1 [11.17] 2.3	37.6 [11.02] 34.0 [9.96] 2.2	35.9 [10.52] 30.0 [8.79] 2.2
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	44.5 [13.04] 27.2 [7.97] 2.4	42.6 [12.48] 24.3 [7.12] 2.3	40.7 [11.93] 21.5 [6.30] 2.3	41.0 [12.02] 32.6 [9.55] 2.5	39.2 [11.49] 29.2 [8.56] 2.4	37.4 [10.96] 25.8 [7.56] 2.4	38.1 [11.17] 37.5 [10.99] 2.4	36.5 [10.70] 33.6 [9.85] 2.4	34.8 [10.20] 29.7 [8.70] 2.3
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	43.3 [12.69] 26.5 [7.77] 2.5	41.4 [12.13] 23.7 [6.95] 2.5	39.5 [11.58] 21.0 [6.15] 2.4	39.7 [11.63] 31.9 [9.35] 2.6	37.9 [11.11] 28.6 [8.38] 2.6	36.2 [10.61] 25.2 [7.39] 2.5	36.8 [10.79] 36.7 [10.76] 2.6	35.2 [10.32] 33.0 [9.67] 2.5	33.6 [9.85] 29.1 [8.53] 2.5
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	41.9 [12.28] 25.8 [7.56] 2.7	40.1 [11.75] 23.1 [6.77] 2.6	38.3 [11.22] 20.4 [5.98] 2.6	38.4 [11.25] 31.1 [9.11] 2.8	36.7 [10.76] 27.9 [8.18] 2.7	35.0 [10.26] 24.6 [7.21] 2.7	35.5 [10.40] 35.5 [10.40] 2.7	34.0 [9.96] 32.3 [9.47] 2.7	32.4 [9.50] 28.5 [8.35] 2.6
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	40.6 [11.90] 24.9 [7.30] 2.8	38.9 [11.40] 22.3 [6.54] 2.8	37.1 [10.87] 19.7 [5.77] 2.7	37.0 [10.84] 30.3 [8.88] 2.9	35.4 [10.37] 27.2 [7.97] 2.9	33.8 [9.91] 24.0 [7.03] 2.8	34.2 [10.02] 34.2 [10.02] 2.9	32.7 [9.58] 31.6 [9.26] 2.8	31.2 [9.14] 27.9 [8.18] 2.8
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	39.4 [11.55] 24.1 [7.06] 3.0	37.6 [11.02] 21.6 [6.33] 2.9	35.9 [10.52] 19.1 [5.60] 2.8	35.8 [10.49] 29.5 [8.65] 3.1	34.2 [10.02] 26.4 [7.74] 3.0	32.7 [9.58] 23.3 [6.83] 2.9	33.0 [9.67] 33.0 [9.67] 3.0	31.5 [9.23] 30.8 [9.03] 3.0	30.1 [8.82] 27.2 [7.97] 2.9
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	38.2 [11.20] 23.3 [6.83] 3.1	36.5 [10.70] 20.9 [6.13] 3.1	34.8 [10.20] 18.4 [5.39] 3.0	34.6 [10.14] 28.7 [8.41] 3.2	33.1 [9.70] 25.7 [7.53] 3.1	31.6 [9.26] 22.7 [6.65] 3.1	31.8 [9.32] 31.8 [9.32] 3.2	30.4 [8.91] 30.1 [8.82] 3.1	29.0 [8.50] 26.6 [7.80] 3.0
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	37.1 [10.87] 22.6 [6.62] 3.3	35.5 [10.40] 20.3 [5.95] 3.2	33.9 [9.94] 17.9 [5.25] 3.1	33.5 [9.82] 28.0 [8.21] 3.4	32.0 [9.38] 25.1 [7.36] 3.3	30.6 [8.97] 22.2 [6.51] 3.2	30.7 [9.00] 30.7 [9.00] 3.3	29.3 [8.59] 29.3 [8.59] 3.3	28.0 [8.21] 26.1 [7.65] 3.2

GROSS SYSTEMS PERFORMANCE DATA—RKPL-A042

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
		wbE	71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
		CFM [L/s]	1810 [854.2]	1450 [684.3]	1090 [514.4]	1810 [854.2]	1450 [684.3]	1090 [514.4]	1810 [854.2]	1450 [684.3]	1090 [514.4]
		DR ②	.23	.20	.15	.23	.20	.15	.23	.20	.15
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	52.7 [15.44] 32.4 [9.50] 2.6	50.4 [14.77] 29.0 [8.50] 2.5	48.1 [14.10] 25.6 [7.50] 2.5	50.0 [14.65] 39.0 [11.43] 2.5	47.8 [14.01] 34.9 [10.23] 2.5	45.7 [13.39] 30.9 [9.06] 2.4	46.1 [13.51] 45.2 [13.25] 2.5	44.1 [12.92] 40.5 [11.87] 2.5	42.1 [12.34] 35.8 [10.49] 2.4
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	51.8 [15.18] 31.9 [9.35] 2.7	49.5 [14.51] 28.5 [8.35] 2.7	47.3 [13.86] 25.2 [7.39] 2.6	49.1 [14.39] 38.5 [11.28] 2.7	46.9 [13.75] 34.5 [10.11] 2.6	44.8 [13.13] 30.4 [8.91] 2.6	45.2 [13.25] 44.7 [13.10] 2.7	43.2 [12.66] 40.0 [11.72] 2.6	41.2 [12.07] 35.4 [10.37] 2.6
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	50.6 [14.83] 31.3 [9.17] 2.9	48.4 [14.18] 28.0 [8.21] 2.8	46.2 [13.54] 24.7 [7.24] 2.8	47.9 [14.04] 37.9 [11.11] 2.9	45.8 [13.42] 33.9 [9.94] 2.8	43.7 [12.81] 30.0 [8.79] 2.7	43.9 [12.87] 43.9 [12.87] 2.8	42.0 [12.31] 39.5 [11.58] 2.8	40.1 [11.75] 34.9 [10.23] 2.7
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	49.1 [14.39] 30.5 [8.94] 3.0	47.0 [13.77] 27.3 [8.00] 3.0	44.9 [13.16] 24.2 [7.09] 2.9	46.4 [13.60] 37.1 [10.87] 3.0	44.4 [13.01] 33.3 [9.76] 2.9	42.4 [12.43] 29.4 [8.62] 2.9	42.5 [12.46] 42.5 [12.46] 3.0	40.7 [11.93] 38.8 [11.37] 2.9	38.8 [11.37] 34.3 [10.05] 2.9
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	47.5 [13.92] 29.7 [8.70] 3.2	45.5 [13.33] 26.6 [7.80] 3.1	43.4 [12.72] 23.5 [6.89] 3.1	44.8 [13.13] 36.4 [10.67] 3.2	42.9 [12.57] 32.6 [9.55] 3.1	40.9 [11.99] 28.8 [8.44] 3.0	40.9 [11.99] 40.9 [11.99] 3.2	39.1 [11.46] 38.3 [11.22] 3.1	37.3 [10.93] 33.7 [9.88] 3.0
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	45.8 [13.42] 28.9 [8.47] 3.4	43.8 [12.84] 25.9 [7.59] 3.3	41.8 [12.25] 22.9 [6.71] 3.2	43.1 [12.63] 35.5 [10.40] 3.3	41.2 [12.07] 31.8 [9.32] 3.3	39.4 [11.55] 28.1 [8.24] 3.2	39.2 [11.49] 39.2 [11.49] 3.3	37.5 [10.99] 37.2 [10.90] 3.2	35.8 [10.49] 33.0 [9.67] 3.2
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	44.1 [12.92] 28.0 [8.21] 3.5	42.1 [12.34] 25.1 [7.36] 3.4	40.2 [11.78] 22.2 [6.51] 3.4	41.3 [12.10] 34.6 [10.14] 3.5	39.5 [11.58] 31.0 [9.09] 3.4	37.7 [11.05] 27.4 [8.03] 3.3	37.4 [10.96] 37.4 [10.96] 3.5	35.8 [10.49] 35.8 [10.49] 3.4	34.2 [10.02] 32.3 [9.47] 3.3
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	42.3 [12.40] 27.1 [7.94] 3.7	40.5 [11.87] 24.3 [7.12] 3.6	38.6 [11.31] 21.5 [6.30] 3.5	39.6 [11.61] 33.7 [9.88] 3.6	37.9 [11.11] 30.2 [8.85] 3.6	36.2 [10.61] 26.7 [7.83] 3.5	35.7 [10.46] 35.7 [10.46] 3.6	34.1 [9.99] 34.1 [9.99] 3.6	32.6 [9.55] 31.6 [9.26] 3.5
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	40.6 [11.90] 26.2 [7.68] 3.8	38.9 [11.40] 23.5 [6.89] 3.7	37.1 [10.87] 20.8 [6.10] 3.7	37.9 [11.11] 32.8 [9.61] 3.8	36.3 [10.64] 29.4 [8.62] 3.7	34.6 [10.14] 26.0 [7.62] 3.6	34.0 [9.96] 34.0 [9.96] 3.8	32.5 [9.52] 32.5 [9.52] 3.7	31.1 [9.11] 30.9 [9.06] 3.6

DR —Depression ratio
dbE —Entering air dry bulb
wbE —Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —kW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 - DR) x (dbE - 80)].

[] Designates Metric Conversions





GROSS SYSTEMS PERFORMANCE DATA—RKPL-A048

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		2000 [943.8]	1600 [755.1]	1200 [566.3]	2000 [943.8]	1600 [755.1]	1200 [566.3]	2000 [943.8]	1600 [755.1]	1200 [566.3]	
DR ②		.21	.18	.14	.21	.18	.14	.21	.18	.14	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	63.2 [18.52] 38.5 [11.28] 2.9	60.4 [17.70] 34.4 [10.08] 2.8	57.7 [16.91] 30.4 [8.91] 2.8	59.4 [17.41] 45.8 [13.42] 2.9	56.8 [16.65] 41.0 [12.02] 2.9	54.2 [15.88] 36.2 [10.61] 2.8	53.7 [15.74] 52.6 [15.42] 2.9	51.4 [15.06] 47.1 [13.80] 2.8	49.0 [14.36] 41.6 [12.19] 2.8
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	61.1 [17.91] 37.1 [10.87] 3.1	58.5 [17.14] 33.3 [9.76] 3.0	55.8 [16.35] 29.4 [8.62] 3.0	57.3 [16.79] 44.5 [13.04] 3.1	54.8 [16.06] 39.9 [11.69] 3.0	52.3 [15.33] 35.2 [10.32] 3.0	51.6 [15.12] 51.3 [15.03] 3.1	49.4 [14.48] 45.9 [13.45] 3.0	47.1 [13.80] 40.5 [11.87] 2.9
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	59.4 [17.41] 36.2 [10.61] 3.3	56.8 [16.65] 32.4 [9.50] 3.2	54.2 [15.88] 28.6 [8.38] 3.1	55.6 [16.29] 43.6 [12.78] 3.3	53.2 [15.59] 39.0 [11.43] 3.2	50.8 [14.89] 34.5 [10.11] 3.2	49.9 [14.62] 49.9 [14.62] 3.3	47.7 [13.98] 45.1 [13.22] 3.2	45.6 [13.36] 39.8 [11.66] 3.1
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	57.9 [16.97] 35.5 [10.40] 3.5	55.4 [16.24] 31.8 [9.32] 3.4	52.9 [15.50] 28.1 [8.24] 3.3	54.1 [15.86] 42.9 [12.57] 3.5	51.8 [15.18] 38.4 [11.25] 3.4	49.4 [14.48] 33.9 [9.94] 3.3	48.4 [14.18] 48.4 [14.18] 3.5	46.3 [13.57] 44.4 [13.01] 3.4	44.2 [12.95] 39.2 [11.49] 3.3
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	56.6 [16.59] 34.9 [10.23] 3.7	54.1 [15.86] 31.3 [9.17] 3.6	51.7 [15.15] 27.6 [8.09] 3.5	52.8 [15.47] 42.3 [12.40] 3.7	50.5 [14.80] 37.9 [11.11] 3.6	48.2 [14.13] 33.4 [9.79] 3.5	47.1 [13.80] 47.1 [13.80] 3.6	45.0 [13.19] 44.0 [12.90] 3.6	43.0 [12.60] 38.8 [11.37] 3.5
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	55.2 [16.18] 34.3 [10.05] 3.9	52.8 [15.47] 30.8 [9.03] 3.8	50.4 [14.77] 27.2 [7.97] 3.7	51.4 [15.06] 41.7 [12.22] 3.9	49.2 [14.42] 37.3 [10.93] 3.8	46.9 [13.75] 33.0 [9.67] 3.7	45.7 [13.39] 45.7 [13.39] 3.8	43.7 [12.81] 43.3 [12.69] 3.8	41.8 [12.25] 38.3 [11.22] 3.7
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	53.7 [15.74] 33.6 [9.85] 4.0	51.4 [15.06] 30.1 [8.82] 4.0	49.1 [14.39] 26.6 [7.80] 3.9	49.9 [14.62] 41.0 [12.02] 4.1	47.7 [13.98] 36.7 [10.76] 4.0	45.6 [13.36] 32.4 [9.50] 3.9	44.2 [12.95] 44.2 [12.95] 4.0	42.3 [12.40] 42.3 [12.40] 3.9	40.4 [11.84] 37.8 [11.08] 3.9
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	52.0 [15.24] 32.7 [9.58] 4.2	49.7 [14.57] 29.3 [8.59] 4.1	47.5 [13.92] 25.8 [7.56] 4.1	48.2 [14.13] 40.0 [11.72] 4.2	46.1 [13.51] 35.8 [10.49] 4.2	44.0 [12.90] 31.7 [9.29] 4.1	42.5 [12.46] 42.5 [12.46] 4.2	40.7 [11.93] 40.7 [11.93] 4.1	38.8 [11.37] 37.0 [10.84] 4.0
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	49.9 [14.62] 31.3 [9.17] 4.4	47.7 [13.98] 28.0 [8.21] 4.3	45.5 [13.33] 24.8 [7.27] 4.2	46.0 [13.48] 38.7 [11.34] 4.4	44.0 [12.90] 34.6 [10.14] 4.3	42.0 [12.31] 30.6 [8.97] 4.3	40.4 [11.84] 40.4 [11.84] 4.4	38.6 [11.31] 38.6 [11.31] 4.3	36.9 [10.81] 35.9 [10.52] 4.2

GROSS SYSTEMS PERFORMANCE DATA—RKPL-A060

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		2310 [1090.1]	1850 [873.1]	1390 [656]	2310 [1090.1]	1850 [873.1]	1390 [656]	2310 [1090.1]	1850 [873.1]	1390 [656]	
DR ②		.20	.17	.12	.20	.17	.12	.20	.17	.12	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	77.5 [22.71] 45.5 [13.33] 3.6	74.2 [21.75] 40.7 [11.93] 3.5	70.8 [20.75] 36.0 [10.55] 3.5	71.2 [20.87] 52.6 [15.42] 3.6	68.1 [19.96] 47.1 [13.80] 3.5	65.0 [19.05] 41.6 [12.19] 3.4	63.7 [18.67] 62.6 [18.35] 3.6	61.0 [17.88] 56.0 [16.41] 3.5	58.2 [17.06] 49.5 [14.51] 3.4
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	75.7 [22.19] 44.6 [13.07] 3.8	72.4 [21.22] 40.0 [11.72] 3.8	69.1 [20.25] 35.3 [10.35] 3.7	69.4 [20.34] 51.8 [15.18] 3.8	66.4 [19.46] 46.4 [13.60] 3.7	63.4 [18.58] 41.0 [12.02] 3.7	61.9 [18.14] 61.7 [18.08] 3.8	59.2 [17.35] 55.3 [16.21] 3.7	56.5 [16.56] 48.8 [14.30] 3.6
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	74.0 [21.69] 43.8 [12.84] 4.1	70.8 [20.75] 39.2 [11.49] 4.0	67.6 [19.81] 34.7 [10.17] 3.9	67.7 [19.84] 51.0 [14.95] 4.0	64.8 [18.99] 45.6 [13.36] 4.0	61.9 [18.14] 40.3 [11.81] 3.9	60.3 [17.67] 60.3 [17.67] 4.0	57.6 [16.88] 54.6 [16.00] 3.9	55.0 [16.12] 48.2 [14.13] 3.8
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	72.4 [21.22] 43.0 [12.60] 4.3	69.3 [20.31] 38.5 [11.28] 4.2	66.1 [19.37] 34.0 [9.96] 4.1	66.1 [19.37] 50.2 [14.71] 4.3	63.3 [18.55] 44.9 [13.16] 4.2	60.4 [17.70] 39.7 [11.63] 4.1	58.7 [17.20] 58.7 [17.20] 4.2	56.1 [16.44] 53.8 [15.77] 4.1	53.6 [15.71] 47.6 [13.95] 4.1
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	70.8 [20.75] 42.2 [12.37] 4.5	67.7 [19.84] 37.8 [11.08] 4.4	64.6 [18.93] 33.4 [9.79] 4.3	64.5 [18.90] 49.4 [14.48] 4.5	61.7 [18.08] 44.2 [12.95] 4.4	58.9 [17.26] 39.0 [11.43] 4.3	57.0 [16.71] 57.0 [16.71] 4.5	54.5 [15.97] 53.2 [15.59] 4.4	52.1 [15.27] 46.9 [13.75] 4.3
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	69.0 [20.22] 41.3 [12.10] 4.7	66.0 [19.34] 37.0 [10.84] 4.6	63.0 [18.46] 32.7 [9.58] 4.6	62.7 [18.38] 48.5 [14.21] 4.7	60.0 [17.58] 43.4 [12.72] 4.6	57.3 [16.79] 38.3 [11.22] 4.5	55.2 [16.18] 55.2 [16.18] 4.7	52.8 [15.47] 52.3 [15.33] 4.6	50.4 [14.77] 46.2 [13.54] 4.5
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	67.0 [19.64] 40.3 [11.81] 5.0	64.1 [18.79] 36.1 [10.58] 4.9	61.2 [17.94] 31.9 [9.35] 4.8	60.7 [17.79] 47.5 [13.92] 4.9	58.1 [17.03] 42.5 [12.46] 4.8	55.4 [16.24] 37.5 [10.99] 4.7	53.2 [15.59] 53.2 [15.59] 4.9	50.9 [14.92] 50.9 [14.92] 4.8	48.6 [14.24] 45.4 [13.31] 4.7
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	64.7 [18.96] 39.2 [11.49] 5.2	61.9 [18.14] 35.1 [10.29] 5.1	59.1 [17.32] 31.0 [9.09] 5.0	58.4 [17.12] 46.3 [13.57] 5.2	55.9 [16.38] 41.5 [12.16] 5.1	53.3 [15.62] 36.6 [10.73] 5.0	50.9 [14.92] 50.9 [14.92] 5.1	48.7 [14.27] 48.7 [14.27] 5.0	46.5 [13.63] 44.5 [13.04] 4.9
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	61.9 [18.14] 37.8 [11.08] 5.4	59.2 [17.35] 33.9 [9.94] 5.3	56.6 [16.59] 29.9 [8.76] 5.2	55.6 [16.29] 45.0 [13.19] 5.4	53.2 [15.59] 40.3 [11.81] 5.3	50.8 [14.89] 35.6 [10.43] 5.2	48.2 [14.13] 48.2 [14.13] 5.4	46.1 [13.51] 46.1 [13.51] 5.3	44.0 [12.90] 43.4 [12.72] 5.1

DR —Depression ratio
dbE —Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 - DR) x (dbE - 80)].

[] Designates Metric Conversions



DIRECT-DRIVE 208 AIRFLOW PERFORMANCE

Unit Model	Motor Speed From Factory		Heating Input BTU/hr [kW]	Manufacturer Recommended Air-Flow Range (Min/Max) CFM	Blower Size/ Motor HP [W] # of Speeds	Motor Speed	CFM [L/s] Air Delivery/RPM/Watts—208 Volts									
	Cool	Heat					External Static Pressure—Inches W.C. [kPa]									
							0.1 [0.2]	0.2 [0.05]	0.3 [0.07]	0.4 [1.10]	0.5 [1.12]	0.6 [1.15]	0.7 [1.17]	0.8 [1.20]		
RKNL-A036	Low	Low	80,000 [23.45]	1050/1350	10x10 1/2 HP [373] 3 Speed Motor (PSC Motor)	Low	CFM	1210 [571]	1193 [563]	1175 [555]	1155 [545]	1125 [531]	1075 [507]	1015 [479]	925 [437]	
		Watts	450				400	395	385	380	375	370	360			
		CFM	1515 [715]				1500 [708]	1475 [696]	1450 [684]	1405 [663]	1350 [637]	1275 [602]	1180 [557]			
RKNL-A042	Med	Med	120,000 [35.17]	1225/1575	10x10 1/2 HP [373] 3 Speed Motor (PSC Motor)	Med	CFM	1515 [715]	1500 [708]	1475 [696]	1450 [684]	1405 [663]	1350 [637]	1275 [602]	1180 [557]	
		Watts	525				515	510	505	490	475	460	445			
		CFM	1680 [793]				1650 [779]	1625 [767]	1580 [746]	1530 [722]	1460 [689]	1390 [656]	1280 [604]			
RKNL-A048	Med	High	135,000 [39.56]	1400/1800	10x10 1/2 HP [373] 3 Speed Motor (PSC Motor)	High	CFM	1680 [793]	1650 [779]	1625 [767]	1580 [746]	1530 [722]	1460 [689]	1390 [656]	1280 [604]	
		Watts	650				640	630	610	580	560	545	515			
		CFM	1210 [571]				1193 [563]	1175 [555]	1155 [545]	1125 [531]	1075 [507]	1015 [479]	925 [437]			
RKNL-A060	Med	Low	80,000 [23.45]	1750/2250	10x10 1 HP [745] 3 Speed Motor (X-13 Motor)	Low	CFM	1575 [743]	1536 [725]	1496 [706]	1457 [688]	1417 [669]	1377 [650]	1338 [631]	1298 [613]	
		Watts	297				314	330	347	364	381	397	414			
		CFM	1985 [937]				1954 [922]	1919 [906]	1876 [885]	1824 [861]	1759 [830]	1679 [792]	1581 [746]			
RKNL-A060	Med	High	135,000 [39.56]	1750/2250	10x10 1 HP [745] 3 Speed Motor (X-13 Motor)	High	CFM	2431 [1147]	2372 [1119]	2306 [1088]	2228 [1051]	2138 [1009]	2032 [959]	1907 [900]	1762 [832]	
		Watts	970				981	964	926	872	806	736	665			
		CFM	1575 [743]				1536 [725]	1496 [706]	1457 [688]	1417 [669]	1377 [650]	1338 [631]	1298 [613]			

[] Designates Metric Conversions



Air

Indoor Airflow Performance
RKNL Series**DIRECT-DRIVE 230/460 AIRFLOW PERFORMANCE**

Unit Model	Motor Speed From Factory		Heating Input BTU/hr [kW]	Manufacturer Recommended Air-Flow Range (Min/Max) CFM	Blower Size/ Motor HP [w] # of Speeds	Motor Speed	CFM [L/s] Air Delivery/RPM/Watts—230/460 Volts							
	Cool	Heat					External Static Pressure—Inches W.C. [kPa]							
							0.1 [0.02]	0.2 [0.05]	0.3 [0.07]	0.4 [1.10]	0.5 [1.12]	0.6 [1.15]	0.7 [1.17]	0.8 [1.20]
RKNL-A036	Low	Low	80,000 [23.45]	1050/1350	10x10 1/2 HP [373] 3 Speed Motor (PSC Motor)	Low	CFM 1400 [661]	460	1360 [642]	1335 [630]	1305 [616]	1255 [592]	1210 [571]	1100 [519]
		Med	120,000 [35.17]			Watts 470	455	450	440	435	425	410		
						CFM 1685 [795]	600	1580 [746]	1550 [732]	1500 [708]	1430 [675]	1350 [637]	1230 [580]	
RKNL-A042	Med	Low	80,000 [23.45]	1225/1575	10x10 1/2 HP [373] 3 Speed Motor (PSC Motor)	Low	CFM 1400 [661]	760	1360 [642]	1335 [630]	1305 [616]	1255 [592]	1210 [571]	1100 [519]
		Med	120,000 [35.17]			Watts 470	455	450	440	435	425	410		
						CFM 1685 [795]	600	1580 [746]	1550 [732]	1500 [708]	1430 [675]	1350 [637]	1230 [580]	
RKNL-A048	Med	Low	80,000 [23.45]	1400/1800	10x10 1/2 HP [373] 3 Speed Motor (PSC Motor)	Low	CFM 1400 [661]	760	1360 [642]	1335 [630]	1305 [616]	1255 [592]	1210 [571]	1100 [519]
		Med	100,000 [29.31]			Watts 470	455	450	440	435	425	410		
		High	135,000 [39.56]			CFM 1870 [883]	580	1790 [845]	1730 [816]	1660 [783]	1580 [746]	1500 [708]	1375 [649]	
RKNL-A060	Med	Low	100,000 [29.31]	1750/2250	10x10 1 HP [745] 3 Speed Motor (X-13 Motor)	Low	CFM 1575 [743]	314	1496 [706]	1457 [688]	1417 [669]	1377 [650]	1338 [631]	1298 [613]
		High	135,000 [39.56]			Watts 297	330	347	364	381	397	414		
						CFM 1985 [937]	574	1919 [906]	1876 [885]	1824 [861]	1759 [830]	1679 [792]	1581 [746]	
						CFM 2431 [1147]	981	2306 [1088]	2228 [1051]	2138 [1009]	2032 [959]	1907 [900]	1762 [832]	665

[] Designates Metric Conversions



INTEGRATED AIR & WATER

DIRECT-DRIVE 208 AIRFLOW PERFORMANCE

Unit Model Cooling Capacity Tons [kW]	Motor Speed from Factory		Heating Input BTU/hr [kW]	Manufacturer Recommended Air-Flow Range (Min/Max) CFM	Blower Size/ Motor HP [w] # of Speeds	Motor Speed	CFM [L/s] Air Delivery/RPM/Watts—208 Volts Slide Discharge—Dry Coil									
	Cool	Heat					External Static Pressure—Inches W.C. [kPa]									
							0.1 [0.02]	0.2 [0.05]	0.3 [0.07]	0.4 [0.10]	0.5 [0.12]	0.6 [0.15]	0.7 [0.17]	0.8 [0.20]		
RKPL-A036 3.0 [10.55]	Low (Tap 2)	Med. (Tap 3)	80,000 [23.45]	1050/1350	10 x 10 1/2 HP [37.3] 3 Speed (X-13 Motor)	Low (Tap 2)	CFM	1381 [652]	1339 [632]	1291 [609]	1236 [583]	1193 [563]	1144 [540]	1079 [509]	1004 [474]	
							RPM	675	717	766	808	855	903	961	1016	
							Watts	200	214	225	233	248	262	275	289	
	High (Tap 4)	High (Tap 4)	120,000 [35.17]			High (Tap 4)	CFM	1479 [698]	1432 [676]	1385 [654]	1346 [635]	1304 [615]	1256 [593]	1201 [567]	1137 [537]	
							RPM	706	751	795	835	874	919	970	1024	
							Watts	242	254	266	282	291	306	319	336	
RKPL-A042 3.5 [12.31]	Med. (Tap 2)	Med. (Tap 3)	120,000 [35.17]	1225/1575	10 x 10 3/4 HP [55.9] 4 Speed (X-13 Motor)	Med. (Tap 3)	CFM	1669 [788]	1626 [767]	1585 [748]	1544 [729]	1500 [708]	1460 [689]	1418 [669]	1376 [649]	
							RPM	788	827	868	908	941	978	1015	1052	
							Watts	356	370	385	401	411	426	438	442	
	Low (Tap 1)	Low (Tap 1)	80,000 [23.45]			Low (Tap 1)	CFM	1444 [681]	1396 [659]	1347 [636]	1306 [616]	1265 [597]	1225 [578]	1185 [559]	1108 [523]	
							RPM	681	731	780	827	873	920	966	1038	
							Watts	208	223	237	253	268	281	293	317	
RKPL-A048 4.0 [14.07]	Med. (Tap 2)	Med. (Tap 3)	120,000 [35.17]	1400/1800	10 x 10 3/4 HP [55.9] 4 Speed (X-13 Motor)	Med. (Tap 3)	CFM	1643 [775]	1605 [757]	1567 [740]	1523 [719]	1479 [698]	1441 [680]	1403 [662]	1365 [644]	
							RPM	768	805	842	887	932	971	1009	1048	
							Watts	304	319	333	350	366	381	395	410	
	High (Tap 4)	High (Tap 4)	100,000 [29.31]			High (Tap 4)	CFM	1875 [885]	1837 [867]	1799 [849]	1755 [828]	1711 [808]	1673 [790]	1635 [772]	1597 [754]	
							RPM	842	880	918	955	991	1025	1058	1092	
							Watts	435	452	468	487	505	519	532	546	
RKPL-A060 5.0 [17.59]	Low (Tap 1)	Low (Tap 1)	80,000 [23.45]	1750/2250	10 x 10 1 HP [74.5] 3 Speed (X-13 Motor)	Low (Tap 1)	CFM	1457 [688]	1410 [665]	1363 [643]	1322 [624]	1280 [604]	1235 [583]	1190 [562]	1106 [522]	
							RPM	710	763	816	858	900	951	991	1002	1061
							Watts	229	241	252	267	282	299	315	330	
	Med. (Tap 3)	Med. (Tap 3)	100,000 [29.31]			Med. (Tap 3)	CFM	1717 [810]	1676 [791]	1635 [772]	1596 [753]	1556 [734]	1514 [715]	1471 [694]	1425 [673]	
							RPM	817	854	890	931	971	1012	1052	1092	
							Watts	360	374	387	402	417	433	449	461	
High (Tap 4)	High (Tap 4)	135,000 [39.56]			High (Tap 4)	CFM	1717 [810]	1676 [791]	1635 [772]	1596 [753]	1556 [734]	1514 [715]	1471 [694]	1425 [673]		
						RPM	817	854	890	931	971	1012	1052	1092		
						Watts	360	374	387	402	417	433	449	461		
RKPL-A060 5.0 [17.59]	Low (Tap 1)	Low (Tap 1)	100,000 [29.31]	1750/2250	10 x 10 1 HP [74.5] 3 Speed (X-13 Motor)	Low (Tap 1)	CFM	1575 [743]	1536 [725]	1496 [706]	1457 [688]	1417 [669]	1377 [650]	1338 [631]	1298 [613]	
							RPM	741	783	824	866	907	949	990	1032	
							Watts	297	314	330	347	364	381	397	414	
	Med. (Tap 2)	Med. (Tap 2)	135,000 [39.56]			Med. (Tap 2)	CFM	1985 [937]	1954 [922]	1919 [906]	1876 [895]	1824 [861]	1759 [830]	1679 [792]	1581 [746]	
							RPM	902	942	979	1013	1040	1071	1096	1119	
							Watts	535	553	574	593	606	609	599	572	
High (Tap 3)	High (Tap 3)	135,000 [39.56]			High (Tap 3)	CFM	2431 [1147]	2372 [1119]	2306 [1088]	2228 [1051]	2138 [1009]	2032 [959]	1907 [900]	1762 [832]		
						RPM	1076	1089	1102	1114	1125	1133	1142	1151		
						Watts	970	981	964	926	872	806	736	665		

[] Designates Metric Conversions

DIRECT-DRIVE 230/460 AIRFLOW PERFORMANCE

Unit Model Cooling Capacity Tons [kW]	Motor Speed from Factory		Heating Input BTU/hr [kW]	Manufacturer Recommended Air-Flow Range (Min/Max) CFM	Blower Size/ Motor HP [w] # of Speeds	Motor Speed	CFM [L/s] Air Delivery/RPM/Watts—230/460 Volts Side Discharge—Dry Coil									
	Cool	Heat					External Static Pressure—Inches W.C. [kPa]									
							0.1 [0.02]	0.2 [0.05]	0.3 [0.07]	0.4 [0.10]	0.5 [0.12]	0.6 [0.15]	0.7 [0.17]	0.8 [0.20]		
RKPL-A036 3.0 [10.55]	Low (Tap 2)		80,000 [23.45]	1050/1350	10 x 10 1/2 HP [373] 3 Speed (X-13 Motor)	Low (Tap 2)	CFM 1381 [652]	1339 [632]	1291 [609]	1236 [583]	1193 [563]	1144 [540]	1079 [509]	1004 [474]		
						RPM 675	717	766	808	855	903	961	1016			
		Watts				200	214	225	233	248	262	275	289			
	Med. (Tap 3)	CFM 1479 [698]	1432 [676]			1385 [654]	1346 [635]	1304 [615]	1256 [593]	1201 [567]	1137 [537]					
		RPM 706	751			795	835	874	919	970	1024					
	Watts	242	254			266	282	291	306	319	336					
RKPL-A042 3.5 [12.31]	Med. (Tap 2)		120,000 [35.17]	1225/1575	10 x 10 3/4 HP [559] 4 Speed (X-13 Motor)	High (Tap 4)	CFM 1669 [788]	1626 [767]	1585 [748]	1544 [729]	1500 [708]	1460 [689]	1418 [669]	1376 [649]		
						RPM 788	827	868	908	941	978	1015	1052			
		Watts				356	370	385	401	411	426	438	442			
	Low (Tap 1)	CFM 1444 [681]	1396 [659]			1347 [636]	1306 [616]	1265 [597]	1225 [578]	1185 [559]	1108 [523]					
		RPM 681	731			780	827	873	920	966	1038					
	Watts	208	223			237	253	268	281	293	317					
RKPL-A048 4.0 [14.07]	Med. (Tap 2)		120,000 [35.17]	1400/1800	10 x 10 3/4 HP [559] 4 Speed (X-13 Motor)	Med. (Tap 2)	CFM 1643 [775]	1605 [757]	1567 [740]	1523 [719]	1479 [698]	1441 [680]	1403 [662]	1365 [644]		
						RPM 768	805	842	887	932	971	1009	1048			
		Watts				304	319	333	350	366	381	395	410			
	High (Tap 4)	CFM 1875 [885]	1837 [867]			1799 [849]	1755 [828]	1711 [808]	1673 [790]	1635 [772]	1597 [754]					
		RPM 842	880			918	955	991	1025	1058	1092					
	Watts	435	452			468	487	505	519	532	546					
RKPL-A060 5.0 [17.59]	Low (Tap 1)		80,000 [23.45]	1750/2250	10 x 10 1 HP [745] 3 Speed (X-13 Motor)	Low (Tap 1)	CFM 1457 [688]	1410 [665]	1363 [643]	1322 [624]	1280 [604]	1235 [583]	1190 [562]	1106 [522]		
						RPM 710	763	816	858	900	951	1002	1061			
		Watts				229	241	252	267	282	299	315	330			
	Med. (Tap 3)	CFM 1717 [810]	1676 [791]			1635 [772]	1596 [753]	1556 [734]	1514 [715]	1471 [694]	1425 [673]					
		RPM 817	854			890	931	971	1012	1052	1092					
	Watts	360	374			387	402	417	433	449	461					
RKPL-A060 5.0 [17.59]	Med. (Tap 2)		100,000 [29.31]	1750/2250	10 x 10 1 HP [745] 3 Speed (X-13 Motor)	Med. (Tap 3)	CFM 1717 [810]	1676 [791]	1635 [772]	1596 [753]	1556 [734]	1514 [715]	1471 [694]	1425 [673]		
						RPM 817	854	890	931	971	1012	1052	1092			
		Watts				360	374	387	402	417	433	449	461			
	High (Tap 4)	CFM 1875 [885]	1837 [867]			1799 [849]	1757 [829]	1714 [809]	1674 [790]	1633 [771]	1548 [731]					
		RPM 877	911			944	979	1014	1053	1091	1113					
	Watts	458	473			488	503	517	534	550	535					
RKPL-A060 5.0 [17.59]	Low (Tap 1)		100,000 [29.31]	1750/2250	10 x 10 1 HP [745] 3 Speed (X-13 Motor)	Low (Tap 1)	CFM 1575 [743]	1536 [725]	1496 [706]	1457 [688]	1417 [669]	1377 [650]	1338 [631]	1298 [613]		
						RPM 741	783	824	866	907	949	790	1032			
		Watts				297	314	330	347	364	381	397	414			
	Med. (Tap 2)	CFM 1985 [937]	1954 [922]			1919 [906]	1876 [885]	1824 [861]	1759 [830]	1679 [792]	1581 [746]					
		RPM 902	942			979	1013	1040	1071	1096	1119					
	Watts	535	553			574	593	606	609	599	572					
RKPL-A060 5.0 [17.59]	High (Tap 3)		135,000 [39.56]	1750/2250	10 x 10 1 HP [745] 3 Speed (X-13 Motor)	High (Tap 3)	CFM 2431 [1147]	2372 [1119]	2306 [1088]	2228 [1051]	2138 [1009]	2032 [959]	1907 [900]	1762 [832]		
						RPM 1076	1089	1102	1114	1125	1133	1142	1151			
		Watts				970	981	964	926	872	806	736	665			

[] Designates Metric Conversions

AIRFLOW PERFORMANCE—3 TON [10.55 kW] GAS HEAT MODELS BELT DRIVE

Air Flow CFM [L/s]	Capacity 3 Ton [10.55 kW]—13 & 14 SEER		External Static Pressure—Inches of Water [kPa]																													
	Voltage 208/230-460—3 Phase		0.1 [.02]		0.2 [.05]		0.3 [.07]		0.4 [.10]		0.5 [.12]		0.6 [.15]		0.7 [.17]		0.8 [.20]		0.9 [.22]		1.0 [.25]		1.1 [.27]		1.2 [.30]		1.3 [.32]		1.4 [.35]		1.5 [.37]	
	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W		
900 [425]	—	—	—	—	650	230	715	260	780	290	845	340	905	400	960	455	1010	470	1055	490	1095	525	1140	555	1170	580	1215	625	1240	645		
1000 [472]	—	—	615	225	670	255	740	280	800	320	860	375	925	425	980	470	1025	485	1075	515	1105	540	1155	575	1180	605	1225	650	1260	715		
1100 [519]	—	—	630	255	700	275	760	310	820	345	885	390	940	435	995	485	1035	505	1085	540	1120	575	1170	615	1190	640	1235	690	1270	730		
1200 [566]	605	250	655	270	720	305	775	340	835	370	900	415	955	475	1005	495	1045	540	1095	580	1130	605	1180	655	1210	690	1245	730	1290	780		
1300 [614]	620	275	675	300	750	340	805	375	855	400	920	455	970	505	1025	530	1065	575	1115	610	1155	630	1195	680	1220	730	1255	780	1300	825		
1400 [661]	640	305	710	340	775	375	825	395	880	440	940	480	990	520	1035	560	1080	590	1125	650	1170	705	1215	775	1230	810	1270	840	1320	880		
1500 [708]	680	340	745	370	800	405	845	425	910	490	955	535	1005	565	1050	615	1090	660	1135	700	1185	760	1225	820	1240	850	1290	905	1330	940		

NOTE: Bold lines separate L, M and N drives respectively.

Drive Package	L						M						
	0	1	2	3	4	5	0	1	2	3	4	5	6
Motor H.P. [W]	1/2 [373]						1/2 [373]						
Blower Sheave	6.9" Pitch Diameter						6.4" Pitch Diameter						
Motor Sheave	2.4"-3.4" Pitch Diameter						3.4"-4.4" Pitch Diameter						
Turns Open	920						1090						
RPM	920	855	800	750	705	665	1230	1180	1130	1090	1045	1000	940

NOTE: Factory sheave settings are shown in bold print.

COMPONENT AIR RESISTANCE

Component	Standard Indoor Airflow—CFM [L/s]												Resistance—Inches Water [kPa]		
	1000 [472]	1200 [566]	1400 [661]	1600 [755]	1800 [850]	2000 [944]	2200 [1038]	2400 [1133]	2600 [1227]	2800 [1321]					
Wet Coil	.035	.040	.060	.070	.085	.100	.110	.120	.125	.130					
Downflow	.055	.060	.066	.072	.080	.086	.093	.100	.107	.115					
R.S.I. Economizer R.A. Damper	.05	.06	.07	.08	.09	.10	.11	.12	.13	.15					

NOTES:

- Performance shown with dry coil & standard 1" [25.4 mm] filters
- Standard CFM @ .075 lbs./cu. ft.
- Motor efficiency = 80% on 208/230, 460, 575 V, 3-Phase
 Motor efficiency = 50% on 208/230 V, 1-Phase
- BHP = $\frac{\text{Watts} \times \text{Motor Eff.}}{746}$
- Add component resistance to duct static to determine total E.S.P.

[I] Designates Metric Conversions

AIRFLOW PERFORMANCE—3.5 TON [12.31 kW] BELT DRIVE

Air Flow CFM [L/s]	Capacity 3.5 Ton [12.31 kW]—13 & 14 SEER																															
	Voltage 208/230-460—3 Phase																															
	External Static Pressure—Inches of Water [kPa]																															
	0.1 [.02]		0.2 [.05]		0.3 [.07]		0.4 [.10]		0.5 [.12]		0.6 [.15]		0.7 [.17]		0.8 [.20]		0.9 [.22]		1.0 [.25]		1.1 [.27]		1.2 [.30]		1.3 [.32]		1.4 [.35]		1.5 [.37]			
	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W
1000 [425]	—	—	—	—	—	—	735	305	790	325	850	360	895	380	945	400	995	420	1060	455	1105	490	1145	520	1185	550	1220	590	1265	630		
1100 [519]	—	—	—	—	—	—	750	320	810	355	870	380	915	400	965	415	1010	450	1075	500	1120	520	1160	560	1195	590	1240	640	1275	700		
1200 [566]	—	—	—	—	725	335	770	350	835	380	885	410	935	440	985	450	1030	500	1090	540	1130	560	1170	600	1215	650	1255	710	1290	760		
1300 [614]	—	—	—	—	745	360	800	395	860	415	905	445	955	465	1005	510	1050	550	1105	590	1140	610	1180	650	1230	710	1270	790	1305	815		
1400 [661]	—	—	—	—	725	375	785	395	830	420	880	460	925	490	985	510	1015	560	1060	600	1100	640	1150	665	1190	710	1245	790	1290	850	1325	900
1500 [708]	—	—	740	410	795	440	855	460	905	495	950	540	1000	590	1030	610	1090	660	1135	690	1170	720	1205	765	1260	860	1310	920	1355	980		
1600 [755]	725	410	765	445	820	470	875	510	925	540	975	570	1015	640	1055	660	1105	700	1145	745	1185	800	1225	860	1275	915	1325	1005	1350	1040		
1700 [802]	740	460	795	495	850	520	905	550	945	600	1000	650	1020	690	1075	740	1125	760	1165	810	1205	865	1240	940	1290	1005	1340	—	—	—		
1800 [850]	770	500	825	535	875	570	925	605	980	650	1010	710	1045	750	1100	790	1145	835	1185	900	1225	960	1270	1020	1315	1110	—	—	—	—		

NOTE: Bold lines separate L, M and N drives respectively.

Drive Package	L						M					
	0	1	2	3	4	5	6	7	8	9	10	11
Motor H.P. [W]	—	—	—	—	—	—	1/2 [373]	—	—	—	—	—
Blower Sheave	—	—	—	—	—	—	6.9" Pitch Diameter	—	—	—	—	—
Motor Sheave	—	—	—	—	—	—	2.8"-3.8" Pitch Diameter	—	—	—	—	—
Turns Open	0	1	2	3	4	5	6	1	2	3	4	5
RPM	958	945	905	865	820	770	725	1225	1185	1145	1100	1060
								1020	1060	1020	1000	1000

NOTE: Factory sheave settings are shown in bold print.

N Drive (Field Supplied)
Blower Sheave—6.4 Pitch Diameter
Motor Sheave—4.0-5.0 Pitch Diameter
RPM Range—1090-1365
Motor—1/2 H.P. [373 W]—1750 RPM

AIRFLOW PERFORMANCE—4 TON [14.07 kW] BELT DRIVE

Air Flow CFM [L/s]	Capacity 4 Ton [14.07 kW]—13 & 14 SEER																															
	Voltage 208/230-460—3 Phase																															
	External Static Pressure—Inches of Water [kPa]																															
	0.1 [.02]		0.2 [.05]		0.3 [.07]		0.4 [.10]		0.5 [.12]		0.6 [.15]		0.7 [.17]		0.8 [.20]		0.9 [.22]		1.0 [.25]		1.1 [.27]		1.2 [.30]		1.3 [.32]		1.4 [.35]		1.5 [.37]			
	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W
1200 [566]	—	—	—	—	—	—	780	360	835	390	885	410	935	440	975	475	1015	505	1070	550	1120	570	1170	600	1220	635	1265	665	1320	705		
1300 [614]	—	—	—	—	—	—	805	390	855	410	910	450	950	470	990	510	1030	545	1085	590	1135	610	1185	640	1235	685	1285	730	1335	775		
1400 [661]	—	—	—	—	—	—	770	385	825	425	870	445	925	480	960	510	1010	550	1060	600	1105	615	1155	650	1200	700	1245	730	1300	770		
1500 [708]	—	—	—	—	790	425	850	475	900	490	940	515	980	550	1025	600	1075	640	1125	670	1175	700	1220	745	1270	780	1315	825	1355	855		
1600 [755]	—	—	775	425	815	465	870	495	920	530	960	560	1005	605	1050	660	1095	680	1145	710	1195	755	1235	800	1285	845	1330	890	1370	935		
1700 [802]	—	—	795	470	850	505	900	540	940	560	980	605	1025	655	1075	715	1120	735	1165	770	1215	810	1270	870	1305	915	1350	940	1385	1000		
1800 [850]	775	470	820	515	875	555	930	600	960	625	1010	680	1050	740	1100	760	1150	800	1190	840	1235	890	1280	930	1330	985	1365	1020	—	—		
1900 [897]	800	525	855	560	910	610	955	650	995	700	1035	755	1075	800	1130	840	1175	870	1220	920	1260	955	1305	1010	1350	1070	1385	1115	—	—		
2000 [944]	830	595	885	640	940	670	970	710	1020	790	1065	840	1115	860	1160	900	1200	950	1240	1010	1295	1060	1330	1105	1375	1160	—	—	—	—		

NOTE: L-Drive left of bold line, M-Drive right of bold line.

Drive Package	L						M					
	0	1	2	3	4	5	6	7	8	9	10	11
Motor H.P. [W]	—	—	—	—	—	—	1/2 [373]	—	—	—	—	—
Blower Sheave	—	—	—	—	—	—	6.4" Pitch Diameter	—	—	—	—	—
Motor Sheave	—	—	—	—	—	—	2.8"-3.8" Pitch Diameter	—	—	—	—	—
Turns Open	0	1	2	3	4	5	6	0	1	2	3	4
RPM	1060	1000	955	910	865	825	770	1385	1330	1280	1225	1175
								1120	1120	1060	1060	1060

NOTE: Factory sheave settings are shown in bold print.

[] Designates Metric Conversions



Air

Indoor Airflow Performance
RKNL/RKPL Series



INTEGRATED AIR & WATER

AIRFLOW PERFORMANCE—5 TON [17.6 kW] THREE PHASE BELT DRIVE

Air Flow CFM [L/s]	Capacity 5 Ton [17.6 kW]—13 SEER		External Static Pressure—Inches of Water [kPa]																													
	Voltage 208/230-460—3 Phase		0.1 [0.02]		0.2 [0.05]		0.3 [0.07]		0.4 [0.10]		0.5 [0.12]		0.6 [0.15]		0.7 [0.17]		0.8 [0.20]		0.9 [0.22]		1.0 [0.25]		1.1 [0.27]		1.2 [0.30]		1.3 [0.32]		1.4 [0.35]		1.5 [0.37]	
	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W		
1400 [661]	—	—	—	—	780	370	815	385	875	425	930	460	970	490	1030	540	1085	570	1105	595	1150	615	1195	645	1235	660	1300	705	1340	745		
1500 [708]	—	—	—	—	795	405	840	415	895	440	945	500	995	540	1045	595	1080	615	1135	650	1165	675	1215	700	1255	735	1320	775	1355	805		
1600 [755]	—	—	—	—	780	390	805	425	870	470	915	510	965	560	1015	600	1060	640	1105	680	1145	705	1180	730	1275	790	1340	840	1365	880		
1700 [802]	—	—	—	—	795	450	840	490	895	530	940	570	990	605	1035	640	1075	680	1120	725	1160	755	1200	790	1245	815	1300	855	1375	940		
1800 [850]	780	455	815	470	870	540	915	560	965	615	1010	660	1055	710	1100	760	1140	785	1175	810	1225	850	1260	880	1320	930	1365	985	1390	1020		
1900 [897]	800	485	850	530	895	590	945	640	995	675	1035	720	1070	775	1120	810	1160	850	1200	890	1245	915	1290	960	1335	1000	1375	1050	1405	1100		
2000 [944]	830	550	880	605	930	655	970	700	1015	730	1055	790	1105	830	1145	875	1180	910	1225	950	1260	980	1320	1035	1350	1075	1385	1120	—	—		
2100 [991]	860	615	915	655	955	705	1005	1005	1040	820	1080	870	1130	910	1170	950	1210	995	1250	1020	1060	1060	1370	1150	1400	1200	—	—	—	—		
2200 [1038]	895	680	945	735	995	780	1030	830	1060	880	1120	940	1155	980	1195	1020	1240	1055	1275	1100	1320	1140	1360	1180	1385	1225	—	—	—	—		
2300 [1085]	940	755	975	795	1015	830	1065	910	1100	965	1150	105	1180	1050	1225	1085	1265	1125	1310	1175	1350	1230	1375	1260	1405	1320	—	—	—	—		
2400 [1133]	970	825	1015	880	1040	925	1095	1005	1145	1055	1175	1085	1225	1140	1260	1175	1300	1210	1340	1255	1370	1315	1400	1375	—	—	—	—	—	—		
2500 [1179]	1015	910	1040	935	1095	1040	1145	1100	1170	1140	1200	1175	1260	1215	1305	1270	1360	1350	1400	1395	—	—	—	—	—	—	—	—	—	—		

NOTE: L-Drive left of bold line, M-Drive right of bold line.

Drive Package	L	M
Motor H.P. [W]	3/4 [559]	1 [746]
Blower Sheave	6.4" Pitch Diameter	6.4" Pitch Diameter
Motor Sheave	2.8"-3.8" Pitch Diameter—Adj.	3.4"-4.4" Pitch Diameter—Adj.
Turns Open	0 1 2 3 4 5 6	0 1 2 3 4 5 6
RPM	1095 1040 995 940 890 835 780	1405 1360 1305 1250 1195 1145 1095

NOTE: Factory sheave settings are shown in bold print.

[] Designates Metric Conversions



Air

Indoor Airflow Performance
RKPL Series

AIRFLOW PERFORMANCE—5 TON [17.6 kW] THREE PHASE BELT DRIVE

Air Flow CFM [L/s]	Capacity 5 Ton [17.6 kW]—14 SEER		Voltage 208/230-460—3 Phase		External Static Pressure—Inches of Water [kPa]																									
	0.1 [.02]		0.2 [.05]		0.3 [.07]		0.4 [.10]		0.5 [.12]		0.6 [.15]		0.7 [.17]		0.8 [.20]		0.9 [.22]		1.0 [.25]		1.1 [.27]		1.2 [.30]		1.3 [.32]		1.4 [.35]		1.5 [.37]	
	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W
1400 [661]	—	—	—	—	—	—	794	395	835	433	877	467	918	499	962	528	1011	556	1085	610	1118	668	1152	723	1187	776	1220	827	1250	876
1500 [708]	—	—	—	—	—	810	440	851	478	892	512	934	544	978	573	1026	601	1087	666	1120	724	1154	779	1189	832	1222	883	1252	932	
1600 [755]	—	—	—	—	789	446	830	489	871	527	913	562	954	593	998	623	1059	668	1090	729	1123	786	1158	842	1193	894	1226	945	1255	995
1700 [802]	—	—	—	—	813	501	854	544	896	582	937	616	979	648	1023	677	1065	736	1096	797	1129	855	1164	910	1199	963	1232	1014	1262	1063
1800 [850]	—	—	799	470	840	560	882	604	923	642	964	676	1006	708	1044	747	1074	811	1105	872	1139	930	1173	985	1208	1038	1241	1089	1271	1138
1900 [897]	788	507	828	574	869	625	910	668	952	706	993	741	1035	772	1057	828	1087	892	1118	953	1151	1011	1186	1066	1221	1119	1254	1170	1283	1219
2000 [944]	817	578	857	644	898	695	939	739	981	777	1022	811	1044	848	1073	916	1103	980	1134	1041	1168	1099	1202	1154	1237	1207	1270	1258	1300	1307
2100 [991]	845	653	885	720	927	771	968	814	1009	852	1035	869	1064	943	1093	1011	1123	1075	1154	1136	1187	1194	1222	1249	1256	1302	1290	1353	—	—
2200 [1038]	873	734	913	801	955	852	996	896	1037	934	1057	971	1086	1044	1115	1113	1145	1177	1176	1238	1210	1295	1244	1350	1279	1403	—	—	—	—
2300 [1085]	902	821	942	888	983	939	1024	983	1049	1000	1081	1080	1111	1153	1140	1222	1169	1286	1201	1347	1234	1404	1269	1459	—	—	—	—	—	—
2400 [1133]	933	914	973	981	1014	1032	1036	1028	1075	1116	1107	1196	1137	1270	1165	1338	1195	1402	1227	1463	—	—	—	—	—	—	—	—	—	—
2500 [1179]	970	1013	1010	1080	1035	1062	1062	1152	1101	1240	1133	1320	1163	1393	1191	1462	—	—	—	—	—	—	—	—	—	—	—	—	—	—

NOTE: L-Drive left of bold line, M-Drive right of bold line.

Drive Package	L					M						
Motor H.P. [W]	3/4 [559]					1 [746]						
Blower Sheave	6.9" Pitch Diameter					6.9" Pitch Diameter						
Motor Sheave	2.8"-3.8" Pitch Diameter—Adj.					4.0"-5.0" Pitch Diameter—Adj.						
Turns Open	0	1	2	3	4	0	1	2	3	4	5	
RPM	1007	963	922	880	833	785	1272	1242	1210	1172	1130	1089

NOTE: Factory sheave settings are shown in bold print.

[] Designates Metric Conversions



ELECTRICAL DATA – RKNL SERIES

		-A036CK08E	-A036CK12E	-A036CL08E	-A036CL12E	-A036CM08E	-A036CM12E	-A036DK08E	-A036DK12E	-A036DL08E
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	187-253	187-253	187-253	414-506	414-506	414-506
	Minimum Circuit Ampacity	19/19	19/19	18/18	18/18	18/18	18/18	11	11	10
	Minimum Overcurrent Protection Device Size	25/25	25/25	20/20	20/20	20/20	20/20	15	15	15
	Maximum Overcurrent Protection Device Size	25/25	25/25	25/25	25/25	25/25	25/25	15	15	15
Compressor Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	460	460	460
	Phase	3	3	3	3	3	3	3	3	3
	HP	3	3	3	3	3	3	3	3	3
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	10.4/10.4	10.4/10.4	10.4/10.4	10.4/10.4	10.4/10.4	10.4/10.4	5.8	5.8	5.8
	Amps (LRA)	88/88	88/88	88/88	88/88	88/88	88/88	38	38	38
Condenser Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	460	460	460
	Phase	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1.5	1.5	1.5	1.5	1.5	1.5	1	1	1
	Amps (LRA)	3	3	3	3	3	3	1.9	1.9	1.9
	Evaporator Fan	No.	1	1	1	1	1	1	1	1
Volts		208/230	208/230	208/230	208/230	208/230	208/230	460	460	460
Phase		1	1	3	3	3	3	1	1	3
HP		1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
Amps (FLA)		4	4	2.8	2.8	2.8	2.8	2	2	1.4
Amps (LRA)		6.7	6.7	11.3	11.3	11.3	11.3	3.6	3.6	6.2

1. Horsepower Per Compressor.
2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

ELECTRICAL DATA – RKNL SERIES										
		-A036DL12E	-A036DM08E	-A036DM12E	-A036JK08E	-A036JK08X	-A036JK12E	-A036JK12X	-A036YL08E	-A036YL12E
Unit Information	Unit Operating Voltage Range	414-506	414-506	414-506	187-253	187-253	187-253	187-253	517-633	517-633
	Minimum Circuit Ampacity	10	10	10	27/27	27/27	27/27	27/27	7	7
	Minimum Overcurrent Protection Device Size	15	15	15	35/35	35/35	35/35	35/35	15	15
	Maximum Overcurrent Protection Device Size	15	15	15	40/40	40/40	40/40	40/40	15	15
Compressor Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	460	460	460	208/230	208/230	208/230	208/230	575	575
	Phase	3	3	3	1	1	1	1	3	3
	HP	3	3	3	3	3	3	3	3	3
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	5.8	5.8	5.8	16.7/16.7	16.7/16.7	16.7/16.7	16.7/16.7	3.8	3.8
	Amps (LRA)	38	38	38	79/79	79/79	79/79	79/79	36.5	36.5
Condenser Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	460	460	460	208/230	208/230	208/230	208/230	575	575
	Phase	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1	1	1	1.5	1.5	1.5	1.5	0.8	0.8
	Amps (LRA)	1.9	1.9	1.9	3	3	3	3	1.9	1.9
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1
	Volts	460	460	460	208/230	208/230	208/230	208/230	575	575
	Phase	3	3	3	1	1	1	1	3	3
	HP	1/2	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4
	Amps (FLA)	1.4	1.4	1.4	4	4	4	4	1.3	1.3
	Amps (LRA)	6.2	6.2	6.2	6.7	6.7	6.7	6.7	6	6

1. Horsepower Per Compressor.

2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

ELECTRICAL DATA – RKNL SERIES

		-A042CL08E	-A042CL12E	-A042CM08E	-A042CM12E	-A042DK08E	-A042DK12E	-A042DL08E	-A042DL12E	-A042DM08E
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	187-253	414-506	414-506	414-506	414-506	414-506
	Minimum Circuit Ampacity	22/22	22/22	22/22	22/22	11	11	10	10	10
	Minimum Overcurrent Protection Device Size	25/25	25/25	25/25	25/25	15	15	15	15	15
	Maximum Overcurrent Protection Device Size	30/30	30/30	30/30	30/30	15	15	15	15	15
Compressor Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	460	460	460	460	460
	Phase	3	3	3	3	3	3	3	3	3
	HP	3 1/2	3 1/2	3 1/2	3 1/2	3 1/2	3 1/2	3 1/2	3 1/2	3 1/2
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	13.5/13.5	13.5/13.5	13.5/13.5	13.5/13.5	6	6	6	6	6
	Amps (LRA)	88/88	88/88	88/88	88/88	44	44	44	44	44
Condenser Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	460	460	460	460	460
	Phase	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1.5	1.5	1.5	1.5	1	1	1	1	1
	Amps (LRA)	3	3	3	3	1.9	1.9	1.9	1.9	1.9
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	460	460	460	460	460
	Phase	3	3	3	3	1	1	3	3	3
	HP	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
	Amps (FLA)	2.8	2.8	2.8	2.8	2	2	1.4	1.4	1.4
	Amps (LRA)	11.3	11.3	11.3	11.3	3.6	3.6	6.2	6.2	6.2

1. Horsepower Per Compressor.

2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

ELECTRICAL DATA – RKNL SERIES										
		-A042DK12E	-A042DL08E	-A042DL12E	-A042DM08E	-A042DM12E	-A042JK08E	-A042JK08X	-A042JK12E	-A042JK12X
Unit Information	Unit Operating Voltage Range	414-506	414-506	414-506	414-506	414-506	187-253	187-253	187-253	187-253
	Minimum Circuit Ampacity	11	10	10	10	10	28/28	28/28	28/28	28/28
	Minimum Overcurrent Protection Device Size	15	15	15	15	15	35/35	35/35	35/35	35/35
	Maximum Overcurrent Protection Device Size	15	15	15	15	15	45/45	45/45	45/45	45/45
Compressor Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	460	460	460	460	460	208/230	208/230	208/230	208/230
	Phase	3	3	3	3	3	1	1	1	1
	HP	3 1/2	3 1/2	3 1/2	3 1/2	3 1/2	3 1/2	3 1/2	3 1/2	3 1/3
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	6	6	6	6	6	17.9/17.9	17.9/17.9	17.9/17.9	17.9/17.9
	Amps (LRA)	44	44	44	44	44	112/112	112/112	112/112	112/112
Condenser Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	460	460	460	460	460	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1	1	1	1	1	1.5	1.5	1.5	1.5
	Amps (LRA)	1.9	1.9	1.9	1.9	1.9	3	3	3	3
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1
	Volts	460	460	460	460	460	208/230	208/230	208/230	208/230
	Phase	1	3	3	3	3	1	1	1	1
	HP	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
	Amps (FLA)	2	1.4	1.4	1.4	1.4	4	4	4	4
	Amps (LRA)	3.6	6.2	6.2	6.2	6.2	6.7	6.7	6.7	6.7

1. Horsepower Per Compressor.

2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

ELECTRICAL DATA – RKNL SERIES

		-A048CK08E	-A048CK10E	-A048CK13E	-A048CL08E	-A048CL10E	-A048CL13E	-A048CM08E	-A048CM10E	-A048CM13E
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253
	Minimum Circuit Ampacity	23/23	23/23	23/23	22/22	22/22	22/22	23/23	23/23	23/23
	Minimum Overcurrent Protection Device Size	30/30	30/30	30/30	25/25	25/25	25/25	30/30	30/30	30/30
	Maximum Overcurrent Protection Device Size	35/35	35/35	35/35	35/35	35/35	35/35	35/35	35/35	35/35
Compressor Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	3	3	3	3	3	3	3	3	3
	HP	4	4	4	4	4	4	4	4	4
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	13.7/13.7	13.7/13.7	13.7/13.7	13.7/13.7	13.7/13.7	13.7/13.7	13.7/13.7	13.7/13.7	13.7/13.7
	Amps (LRA)	83.1/83.1	83.1/83.1	83.1/83.1	83.1/83.1	83.1/83.1	83.1/83.1	83.1/83.1	83.1/83.1	83.1/83.1
Condenser Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	Amps (LRA)	3	3	3	3	3	3	3	3	3
	Evaporator Fan	No.	1	1	1	1	1	1	1	1
Volts		208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
Phase		1	1	1	3	3	3	3	3	3
HP		1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4	3/4
Amps (FLA)		4	4	4	2.8	2.8	2.8	3.4	3.4	3.4
Amps (LRA)		6.7	6.7	6.7	11.3	11.3	11.3	16.8	16.8	16.8

1. Horsepower Per Compressor.
2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

ELECTRICAL DATA – RKNL SERIES

		-A048DK08E	-A048DK10E	-A048DK13E	-A048DL08E	-A048DL10E	-A048DL13E	-A048DM08E	-A048DM10E	-A048DM13E
Unit Information	Unit Operating Voltage Range	414-506	414-506	414-506	414-506	414-506	414-506	414-506	414-506	414-506
	Minimum Circuit Ampacity	11	11	11	11	11	11	11	11	11
	Minimum Overcurrent Protection Device Size	15	15	15	15	15	15	15	15	15
	Maximum Overcurrent Protection Device Size	15	15	15	15	15	15	15	15	15
Compressor Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	460	460	460	460	460	460	460	460	460
	Phase	3	3	3	3	3	3	3	3	3
	HP	4	4	4	4	4	4	4	4	4
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
	Amps (LRA)	41	41	41	41	41	41	41	41	41
Condenser Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	460	460	460	460	460	460	460	460	460
	Phase	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1	1	1	1	1	1	1	1	1
	Amps (LRA)	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1
	Volts	460	460	460	460	460	460	460	460	460
	Phase	1	1	1	3	3	3	3	3	3
	HP	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4	3/4
	Amps (FLA)	2	2	2	1.4	1.4	1.4	1.6	1.6	1.6
	Amps (LRA)	3.6	3.6	3.6	6.2	6.2	6.2	8.4	8.4	8.4

1. Horsepower Per Compressor.

2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

ELECTRICAL DATA – RKNL SERIES

		-A048JK08E	-A048JK08X	-A048JK10E	-A048JK10X	-A048JK13E	-A048JK13X	-A048YL10E	-A048YL13E	-A048YM10E
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	187-253	187-253	187-253	517-633	517-633	517-633
	Minimum Circuit Ampacity	33/33	33/33	33/33	33/33	33/33	33/33	9	9	9
	Minimum Overcurrent Protection Device Size	40/40	40/40	40/40	40/40	40/40	40/40	15	15	15
	Maximum Overcurrent Protection Device Size	50/50	50/50	50/50	50/50	50/50	50/50	15	15	15
Compressor Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	575	575	575
	Phase	1	1	1	1	1	1	3	3	3
	HP	4	4	4	4	4	4	4	4	4
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (FLA)	21.8/21.8	21.8/21.8	21.8/21.8	21.8/21.8	21.8/21.8	21.8/21.8	4.8	4.8	4.8
	Amps (LRA)	117/117	117/117	117/117	117/117	117/117	117/117	33	33	33
Condenser Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	575	575	575
	Phase	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1.5	1.5	1.5	1.5	1.5	1.5	0.8	0.8	0.8
	Amps (LRA)	3	3	3	3	3	3	1.9	1.9	1.9
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	575	575	575
	Phase	1	1	1	1	1	1	3	3	3
	HP	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4	3/4
	Amps (FLA)	4	4	4	4	4	4	1.3	1.3	1.3
	Amps (LRA)	6.7	6.7	6.7	6.7	6.7	6.7	6	6	6

1. Horsepower Per Compressor.
2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

ELECTRICAL DATA – RKNL SERIES											
		-A048YM13E	-A060CK10E	-A060CK13E	-A060CL10E	-A060CL13E	-A060CM10E	-A060CM13E	-A060DK10E	-A060DK13E	
Unit Information	Unit Operating Voltage Range	517-633	187-253	187-253	187-253	187-253	187-253	187-253	414-506	414-506	
	Minimum Circuit Ampacity	9	30/30	30/30	26/26	26/26	26/26	26/26	15	15	
	Minimum Overcurrent Protection Device Size	15	35/35	35/35	30/30	30/30	30/30	30/30	20	20	
	Maximum Overcurrent Protection Device Size	15	40/40	40/40	40/40	40/40	40/40	40/40	20	20	
Compressor Motor	No.	1	1	1	1	1	1	1	1	1	
	Volts	575	208/230	208/230	208/230	208/230	208/230	208/230	460	460	
	Phase	3	3	3	3	3	3	3	3	3	
	HP	4	5	5	5	5	5	5	5	5	
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450	
	Amps (RLA)	4.8	15.6/15.6	15.6/15.6	15.6/15.6	15.6/15.6	15.6/15.6	15.6/15.6	15.6/15.6	7.8	7.8
	Amps (LRA)	33	110/110	110/110	110/110	110/110	110/110	110/110	110/110	52	52
Condenser Motor	No.	1	1	1	1	1	1	1	1	1	
	Volts	575	208/230	208/230	208/230	208/230	208/230	208/230	460	460	
	Phase	1	1	1	1	1	1	1	1	1	
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	
	Amps (FLA)	0.8	2.2	2.2	2.2	2.2	2.2	2.2	2.2	1	1
	Amps (LRA)	1.9	4.9	4.9	4.9	4.9	4.9	4.9	4.9	1.9	1.9
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1	
	Volts	575	208/230	208/230	208/230	208/230	208/230	208/230	460	460	
	Phase	3	1	1	3	3	3	3	1	1	
	HP	3/4	1	1	3/4	3/4	1	1	1	1	
	Amps (FLA)	1.3	7.6	7.6	3.4	3.4	3.8	3.8	4.0	4.0	
	Amps (LRA)	6	0	0	16.8	16.8	24	24	0	0	

1. Horsepower Per Compressor.

2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

ELECTRICAL DATA – RKNL SERIES

		-A060DL10E	-A060DL13E	-A060DM10E	-A060DM13E	-A060JK10E	-A060JK10X	-A060JK13E	-A060JK13X	-A060YL10E
Unit Information	Unit Operating Voltage Range	414-506	414-506	414-506	414-506	187-253	187-253	187-253	187-253	517-633
	Minimum Circuit Ampacity	13	13	13	13	43/43	43/43	43/43	43/43	10
	Minimum Overcurrent Protection Device Size	15	15	15	15	50/50	50/50	50/50	50/50	15
	Maximum Overcurrent Protection Device Size	20	20	20	20	60/60	60/60	60/60	60/60	15
Compressor Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	460	460	460	460	208/230	208/230	208/230	208/230	575
	Phase	3	3	3	3	1	1	1	1	3
	HP	5	5	5	5	5	5	5	5	5
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	7.8	7.8	7.8	7.8	26.3/26.3	26.3/26.3	26.3/26.3	26.3/26.3	5.8
	Amps (LRA)	52	52	52	52	134/134	134/134	134/134	134/134	38.9
Condenser Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	460	460	460	460	208/230	208/230	208/230	208/230	575
	Phase	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1	1	1	1	2.2	2.2	2.2	2.2	0.8
	Amps (LRA)	1.9	1.9	1.9	1.9	4.9	4.9	4.9	4.9	1.9
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1
	Volts	460	460	460	460	208/230	208/230	208/230	208/230	575
	Phase	3	3	3	3	1	1	1	1	3
	HP	3/4	3/4	1	1	1	1	1	1	3/4
	Amps (FLA)	1.6	1.6	1.9	1.9	7.6	7.6	7.6	7.6	1.3
	Amps (LRA)	8.4	8.4	12	12	0	0	0	0	6

1. Horsepower Per Compressor.
2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

ELECTRICAL DATA – RKNL SERIES				
		-A060YL13E	-A060YM10E	-A060YM13E
Unit Information	Unit Operating Voltage Range	517-633	517-633	517-633
	Minimum Circuit Ampacity	10	10	10
	Minimum Overcurrent Protection Device Size	15	15	15
	Maximum Overcurrent Protection Device Size	15	15	15
Compressor Motor	No.	1	1	1
	Volts	575	575	575
	Phase	3	3	3
	HP	5	5	5
	RPM	3450	3450	3450
	Amps (RLA)	5.8	5.8	5.8
	Amps (LRA)	38.9	38.9	38.9
Condenser Motor	No.	1	1	1
	Volts	575	575	575
	Phase	1	1	1
	HP	1/3	1/3	1/3
	Amps (FLA)	0.8	0.8	0.8
	Amps (LRA)	1.9	1.9	1.9
	Evaporator Fan	No.	1	1
Volts		575	575	575
Phase		3	3	3
HP		3/4	1	1
Amps (FLA)		1.3	1.4	1.4
Amps (LRA)		6	7.2	7.2

1. Horsepower Per Compressor.

2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

ELECTRICAL DATA – RKPL SERIES

		-A036CK08E	-A036CK12E	-A036CL08E	-A036CL12E	-A036CM08E	-A036CM12E	-A036DL08E	-A036DK08E	-A036DK12E
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	187-253	187-253	187-253	414-506	414-506	414-506
	Minimum Circuit Ampacity	19/19	19/19	18/18	18/18	18/18	18/18	10	11	11
	Minimum Overcurrent Protection Device Size	25/25	25/25	20/20	20/20	20/20	20/20	15	15	15
	Maximum Overcurrent Protection Device Size	25/25	25/25	25/25	25/25	25/25	25/25	15	15	15
Compressor Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	460	460	460
	Phase	3	3	3	3	3	3	3	3	3
	HP	3	3	3	3	3	3	3	3	3
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	10.4/10.4	10.4/10.4	10.4/10.4	10.4/10.4	10.4/10.4	10.4/10.4	5.8	5.8	5.8
	Amps (LRA)	88/88	88/88	88/88	88/88	88/88	88/88	38	38	38
Condenser Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	460	460	460
	Phase	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1.5	1.5	1.5	1.5	1.5	1.5	1	1	1
	Amps (LRA)	3	3	3	3	3	3	1.9	1.9	1.9
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	460	460	460
	Phase	1	1	3	3	3	3	3	1	1
	HP	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
	Amps (FLA)	4.1	4.1	2.8	2.8	2.8	2.8	1.4	2.1	2.1
	Amps (LRA)	0	0	11.3	11.3	11.3	11.3	6.2	0	0

1. Horsepower Per Compressor.

2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

ELECTRICAL DATA – RKPL SERIES										
		-A036DL12E	-A036DM08E	-A036DM12E	-A036JK08E	-A036JK08X	-A036JK13E	-A036JK12X	-A042CK08E	-A042CK12E
Unit Information	Unit Operating Voltage Range	414-506	414-506	414-506	187-253	187-253	187-253	187-253	187-253	187-253
	Minimum Circuit Ampacity	10	10	10	27/27	27/27	27/27	27/27	25/25	25/25
	Minimum Overcurrent Protection Device Size	15	15	15	35/35	35/35	35/35	35/35	30/30	30/30
	Maximum Overcurrent Protection Device Size	15	15	15	40/40	40/40	40/40	40/40	35/35	35/35
Compressor Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	460	460	460	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	3	3	3	1	1	1	1	3	3
	HP	3	3	3	3	3	3	3	3 1/2	3 1/2
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	5.8	5.8	5.8	16.7/16.7	16.7/16.7	16.7/16.7	16.7/16.7	13.5/13.5	13.5/13.5
	Amps (LRA)	38	38	38	79/79	79/79	79/79	79/79	88/88	88/88
Condenser Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	460	460	460	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1	1	1	1.5	1.5	1.5	1.5	1.5	1.5
	Amps (LRA)	1.9	1.9	1.9	3	3	3	3	3	3
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1
	Volts	460	460	460	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	3	3	3	1	1	1	1	1	1
	HP	1/2	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4
	Amps (FLA)	1.4	1.4	1.4	4.1	4.1	4.1	4.1	6	6
	Amps (LRA)	6.2	6.2	6.2	0	0	0	0	0	0

1. Horsepower Per Compressor.

2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

ELECTRICAL DATA – RKPL SERIES										
		-A042CL08E	-A042CL12E	-A042CM08E	-A042CM12E	-A042DK08E	-A042DK12E	-A042DL08E	-A042DL12E	-A042DM08E
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	187-253	414-506	414-506	414-506	414-506	414-506
	Minimum Circuit Ampacity	22/22	22/22	22/22	22/22	12	12	10	10	10
	Minimum Overcurrent Protection Device Size	25/25	25/25	25/25	25/25	15	15	15	15	15
	Maximum Overcurrent Protection Device Size	30/30	30/30	30/30	30/30	15	15	15	15	15
Compressor Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	460	460	460	460	460
	Phase	3	3	3	3	3	3	3	3	3
	HP	3 1/2	3 1/2	3 1/2	3 1/2	3 1/2	3 1/2	3 1/2	3 1/2	3 1/2
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	13.5/13.5	13.5/13.5	13.5/13.5	13.5/13.5	6	6	6	6	6
	Amps (LRA)	88/88	88/88	88/88	88/88	44	44	44	44	44
Condenser Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	460	460	460	460	460
	Phase	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1.5	1.5	1.5	1.5	1	1	1	1	1
	Amps (LRA)	3	3	3	3	1.9	1.9	1.9	1.9	1.9
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	460	460	460	460	460
	Phase	3	3	3	3	1	1	3	3	3
	HP	1/2	1/2	1/2	1/2	3/4	3/4	1/2	1/2	1/2
	Amps (FLA)	2.8	2.8	2.8	2.8	3.2	3.2	1.4	1.4	1.4
	Amps (LRA)	11.3	11.3	11.3	11.3	0	0	6.2	6.2	6.2

1. Horsepower Per Compressor.
2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

ELECTRICAL DATA – RKPL SERIES										
		-A042DM12E	-A042JK08E	-A042JK08X	-A042JK12E	-A042JK12X	-A048CK08E	-A048CK10E	-A048CK13E	-A048CL08E
Unit Information	Unit Operating Voltage Range	414-506	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253
	Minimum Circuit Ampacity	10	30/30	30/30	30/30	30/30	25/25	25/25	25/25	22/22
	Minimum Overcurrent Protection Device Size	15	35/35	35/35	35/35	35/35	30/30	30/30	30/30	25/25
	Maximum Overcurrent Protection Device Size	15	45/45	45/45	45/45	45/45	35/35	35/35	35/35	35/35
Compressor Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	460	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	3	1	1	1	1	3	3	3	3
	HP	3 1/2	3 1/2	3 1/2	3 1/2	3 1/3	4	4	4	4
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	6	17.9/17.9	17.9/17.9	17.9/17.9	17.9/17.9	13.7/13.7	13.7/13.7	13.7/13.7	13.7/13.7
	Amps (LRA)	44	112/112	112/112	112/112	112/112	83.1/83.1	83.1/83.1	83.1/83.1	83.1/83.1
Condenser Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	460	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	Amps (LRA)	1.9	3	3	3	3	3	3	3	3
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1
	Volts	460	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	3	1	1	1	1	1	1	1	3
	HP	1/2	3/4	3/4	3/4	3/4	3/4	3/4	3/4	1/2
	Amps (FLA)	1.4	6	6	6	6	6	6	6	2.8
	Amps (LRA)	6.2	0	0	0	0	0	0	0	11.3

1. Horsepower Per Compressor.

2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

ELECTRICAL DATA – RKPL SERIES

		-A048CL10E	-A048CL13E	-A048CM08E	-A048CM10E	-A048CM13E	-A048DK08E	-A048DK10E	-A048DK13E	-A048DL08E
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	187-253	187-253	414-506	414-506	414-506	414-506
	Minimum Circuit Ampacity	22/22	22/22	23/23	23/23	23/23	12	12	12	11
	Minimum Overcurrent Protection Device Size	25/25	25/25	30/30	30/30	30/30	15	15	15	15
	Maximum Overcurrent Protection Device Size	35/35	35/35	35/35	35/35	35/35	15	15	15	15
Compressor Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	460	460	460	460
	Phase	3	3	3	3	3	3	3	3	3
	HP	4	4	4	4	4	4	4	4	4
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	13.7/13.7	13.7/13.7	13.7/13.7	13.7/13.7	13.7/13.7	6.2	6.2	6.2	6.2
	Amps (LRA)	83.1/83.1	83.1/83.1	83.1/83.1	83.1/83.1	83.1/83.1	41	41	41	41
Condenser Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	460	460	460	460
	Phase	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1.5	1.5	1.5	1.5	1.5	1	1	1	1
	Amps (LRA)	3	3	3	3	3	1.9	1.9	1.9	1.9
	Evaporator Fan	No.	1	1	1	1	1	1	1	1
Volts		208/230	208/230	208/230	208/230	208/230	460	460	460	460
Phase		3	3	3	3	3	1	1	1	3
HP		1/2	1/2	3/4	3/4	3/4	3/4	3/4	3/4	1/2
Amps (FLA)		2.8	2.8	3.4	3.4	3.4	3.2	3.2	3.2	1.4
Amps (LRA)		11.3	11.3	16.8	16.8	16.8	0	0	0	6.2

1. Horsepower Per Compressor.
2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

ELECTRICAL DATA – RKPL SERIES										
		-A048DL10E	-A048DL13E	-A048DM08E	-A048DM10E	-A048DM13E	-A048JK08E	-A048JK08X	-A048JK10E	-A048JK10X
Unit Information	Unit Operating Voltage Range	414-506	414-506	414-506	414-506	414-506	187-253	187-253	187-253	187-253
	Minimum Circuit Ampacity	11	11	11	11	11	35/35	35/35	35/35	35/35
	Minimum Overcurrent Protection Device Size	15	15	15	15	15	45/45	45/45	45/45	45/45
	Maximum Overcurrent Protection Device Size	15	15	15	15	15	50/50	50/50	50/50	50/50
Compressor Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	460	460	460	460	460	208/230	208/230	208/230	208/230
	Phase	3	3	3	3	3	1	1	1	1
	HP	4	4	4	4	4	4	4	4	4
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	6.2	6.2	6.2	6.2	6.2	21.8/21.8	21.8/21.8	21.8/21.8	21.8/21.8
	Amps (LRA)	41	41	41	41	41	117/117	117/117	117/117	117/117
Condenser Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	460	460	460	460	460	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1	1	1	1	1	1.5	1.5	1.5	1.5
	Amps (LRA)	1.9	1.9	1.9	1.9	1.9	3	3	3	3
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1
	Volts	460	460	460	460	460	208/230	208/230	208/230	208/230
	Phase	3	3	3	3	3	1	1	1	1
	HP	1/2	1/2	3/4	3/4	3/4	3/4	3/4	3/4	3/4
	Amps (FLA)	1.4	1.4	1.6	1.6	1.6	6	6	6	6
	Amps (LRA)	6.2	6.2	8.4	8.4	8.4	0	0	0	0

1. Horsepower Per Compressor.

2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

ELECTRICAL DATA – RKPL SERIES



		-A048JK13E	-A048JK13X	-A060CK10E	-A060CK13E	-A060CL10E	-A060CL13E	-A060CM10E	-A060CM13E	-A060DK10E	
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	414-506	
	Minimum Circuit Ampacity	35/35	35/35	30/30	30/30	26/26	26/26	26/26	26/26	15	
	Minimum Overcurrent Protection Device Size	45/45	45/45	35/35	35/35	30/30	30/30	35/35	35/35	20	
	Maximum Overcurrent Protection Device Size	50/50	50/50	45/45	45/45	40/40	40/40	40/40	40/40	20	
Compressor Motor	No.	1	1	1	1	1	1	1	1	1	
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	460	
	Phase	1	1	3	3	3	3	3	3	3	
	HP	4	4	5	5	5	5	5	5	5	
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450	
	Amps (RLA)	21.8/21.8	21.8/21.8	16/16	16/16	16/16	16/16	16/16	16/16	16/16	7.8
	Amps (LRA)	117/117	117/117	110/110	110/110	110/110	110/110	110/110	110/110	110/110	52
Condenser Motor	No.	1	1	1	1	1	1	1	1	1	
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	460	
	Phase	1	1	1	1	1	1	1	1	1	
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	
	Amps (FLA)	1.5	1.5	2.2	2.2	2.2	2.2	2.2	2.2	1	
	Amps (LRA)	3	3	4.9	4.9	4.9	4.9	4.9	4.9	1.9	
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1	
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	460	
	Phase	1	1	1	1	3	3	3	3	1	
	HP	3/4	3/4	1	1	3/4	3/4	1	1	1	
	Amps (FLA)	6	6	7.6	7.6	3.4	3.4	3.8	3.8	4.0	
	Amps (LRA)	0	0	0	0	16.8	16.8	24	24	0	

1. Horsepower Per Compressor.

2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.



ELECTRICAL DATA – RKPL SERIES										
		-A060DK13E	-A060DL10E	-A060DL13E	-A060DM10E	-A060DM13E	-A060JK10E	-A060JK10X	-A060JK13E	-A060JK13X
Unit Information	Unit Operating Voltage Range	414-506	414-506	414-506	414-506	414-506	187-253	187-253	187-253	187-253
	Minimum Circuit Ampacity	15	13	13	13	13	43/43	43/43	43/43	43/43
	Minimum Overcurrent Protection Device Size	20	15	15	15	15	50/50	50/50	50/50	50/50
	Maximum Overcurrent Protection Device Size	20	20	20	20	20	60/60	60/60	60/60	60/60
Compressor Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	460	460	460	460	460	208/230	208/230	208/230	208/230
	Phase	3	3	3	3	3	1	1	1	1
	HP	5	5	5	5	5	5	5	5	5
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	7.8	7.8	7.8	7.8	7.8	26.4/26.4	26.4/26.4	26.4/26.4	26.4/26.4
	Amps (LRA)	52	52	52	52	52	134/134	134/134	134/134	134/134
Condenser Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	460	460	460	460	460	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1	1	1	1	1	2.2	2.2	2.2	2.2
	Amps (LRA)	1.9	1.9	1.9	1.9	1.9	4.9	4.9	4.9	4.9
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1
	Volts	460	460	460	460	460	208/230	208/230	208/230	208/230
	Phase	1	3	3	3	3	1	1	1	1
	HP	1	3/4	3/4	1	1	1	1	1	1
	Amps (FLA)	4.0	1.6	1.6	1.9	1.9	7.6	7.6	7.6	7.6
	Amps (LRA)	0	8.4	8.4	12	12	0	0	0	0

1. Horsepower Per Compressor.
2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

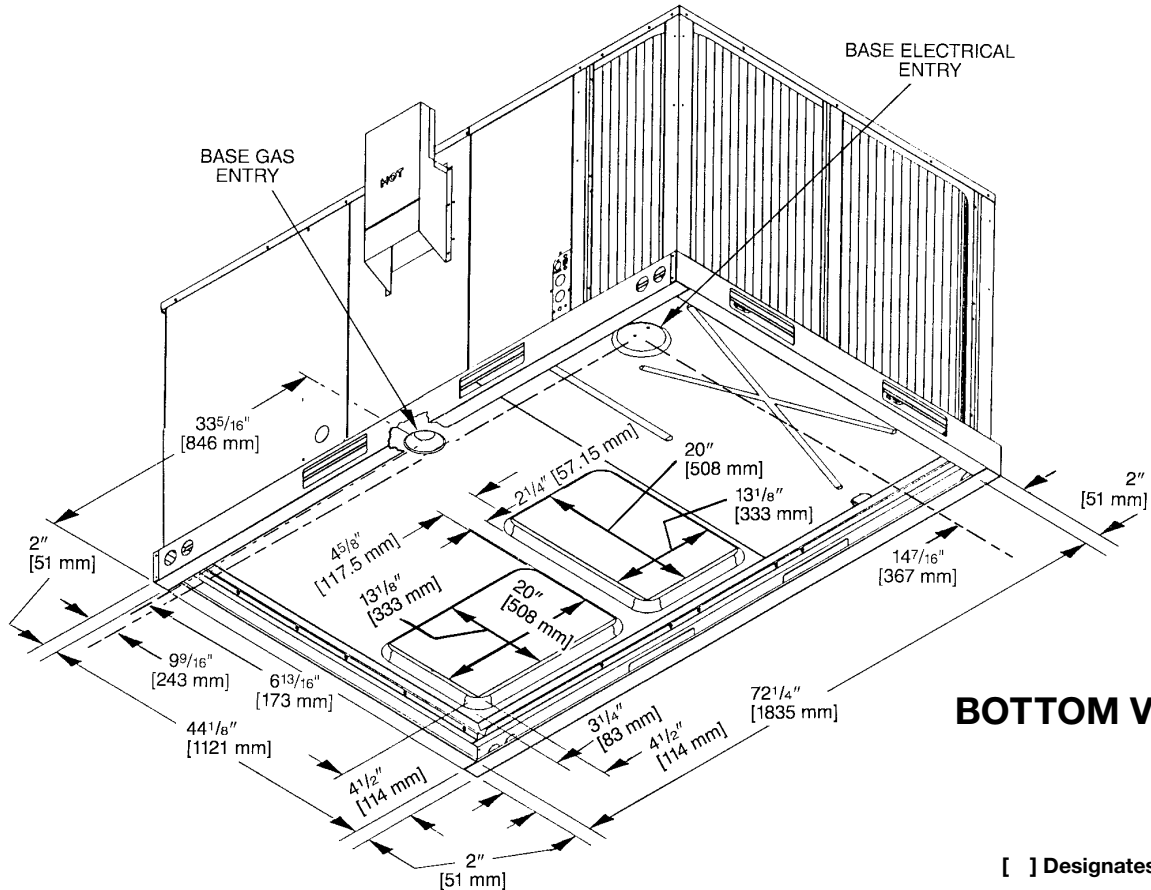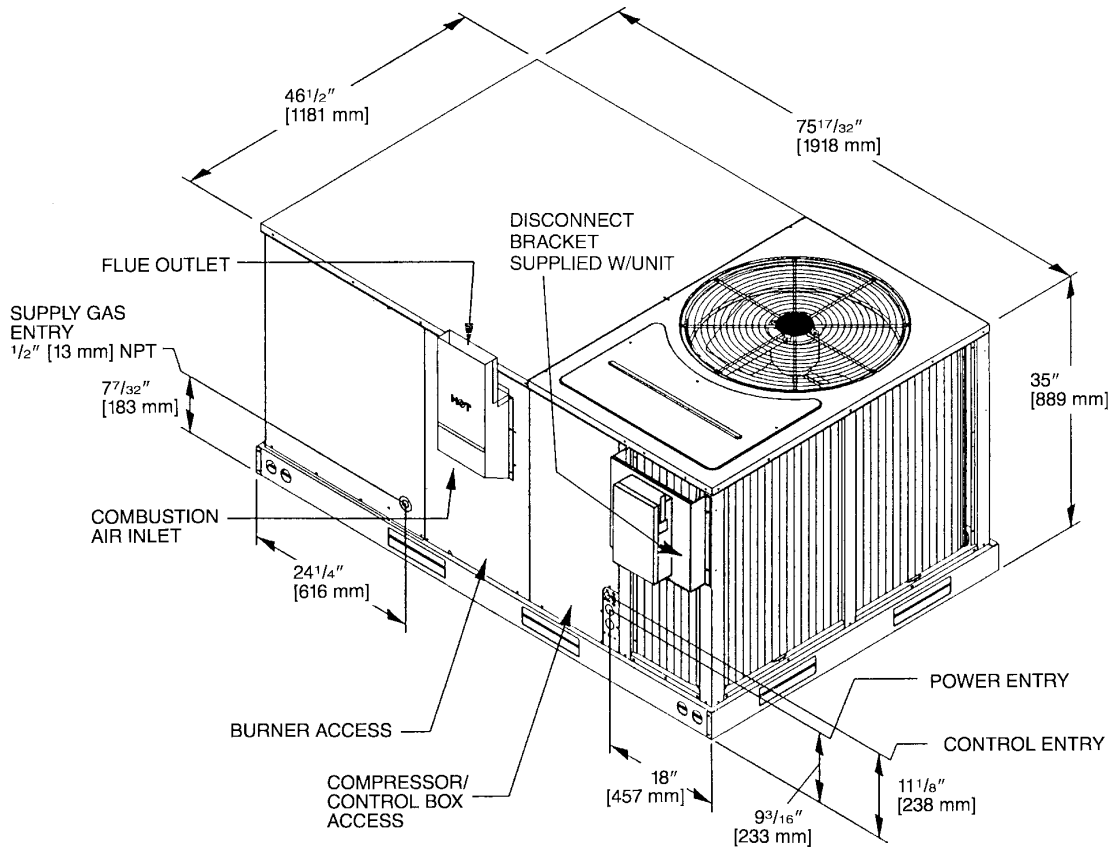

BOTTOM VIEW

[] Designates Metric Conversions

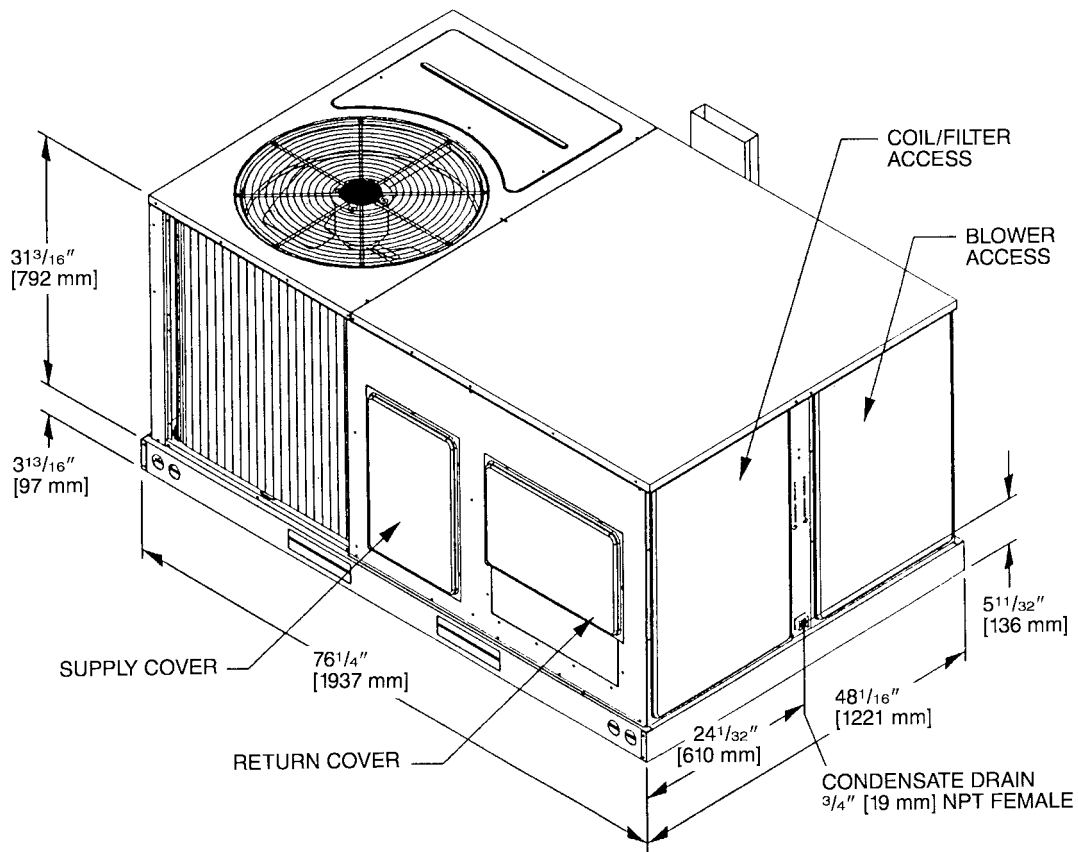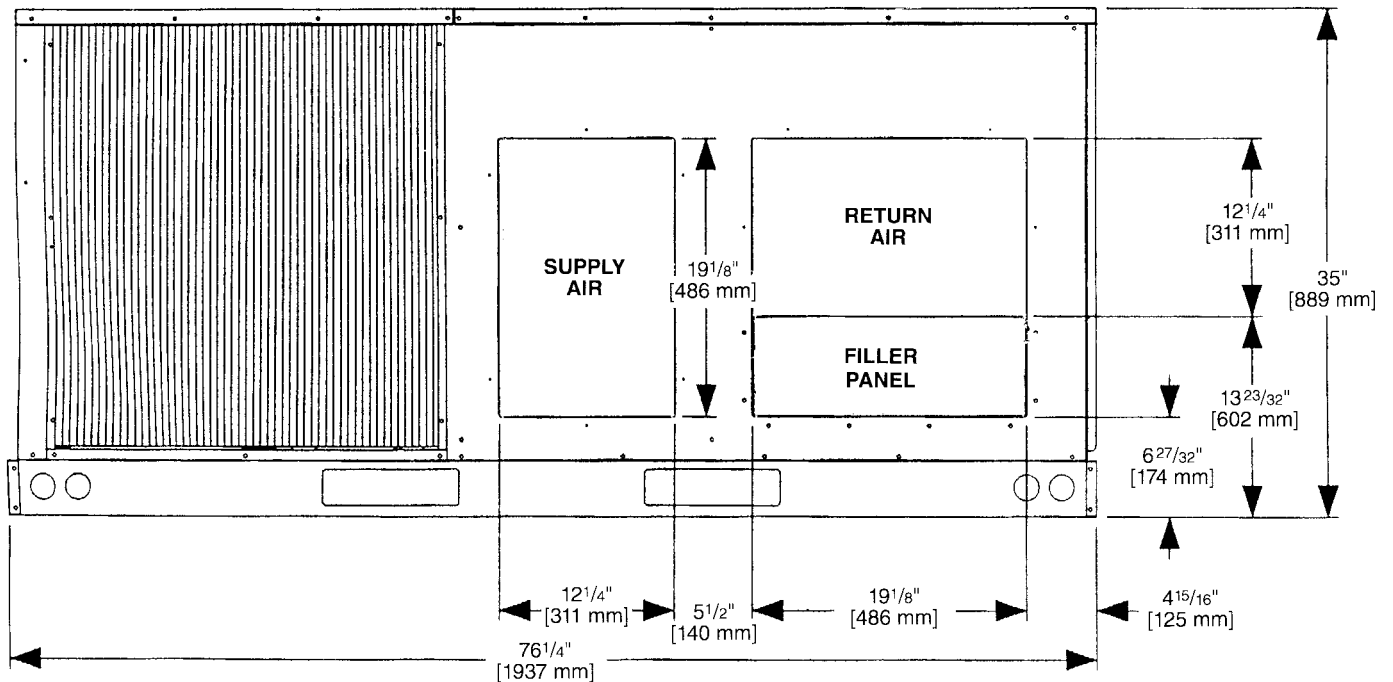
SUPPLY AND RETURN DIMENSIONS


[] Designates Metric Conversions

WEIGHTS

Accessory	3-5 Ton [10.6-17.6 kW]	
	Shipping	Operating
	lbs [kg]	lbs [kg]
Economizer with Single Enthalpy	70 [32]	60 [27]
Power Exhaust	70 [32]	67 [30]
Fresh Air Damper (Manual)	11 [5]	9 [4]
Fresh Air Damper (Motorized)	13 [6]	11 [5]
Roof Curb 14"	92 [42]	88 [40]
Roof Curb 24"	108 [49]	104 [47]
Concentric Diffuser 18" Flush	37 [17]	26 [12]
Concentric Diffuser 20" Flush	54 [24]	42 [19]
Side Discharge Concentric Diffuser RXRN-FA60	35 [16]	20 [9]
Side Discharge Concentric Diffuser RXRN-FA65	55 [25]	40 [18]

CENTER OF GRAVITY (C.G.)

Capacity Tons [kW]	A in. [mm]	B in. [mm]
3-5 [10.6-17.6]	38 ¹ / ₄ [972]	25 ³ / ₄ [654]

Capacity Tons [kW]	Corner Weights by Percentage			
	A	B	C	D
3-5 [10.6-17.6]	22%	27%	23%	28%



CLEARANCES (3 to 5 Ton [10.6 to 17.6 kW] Models)

The following minimum clearances are recommended for proper unit performance and serviceability.

Recommended Clearance in. [mm]	Location
48 [1219]	A - Front
18 [457]	B - Condenser Coil
12 [305]	C - Duct Side
36 [914]	D - Evaporator End
60 [1524]	E - Above

*Without Economizer, 57" [1448 mm] With Economizer

NOTE: Supply duct may be installed with "0" inch clearance to combustible materials, provided 1" [25.4 mm] minimum Fiberglass insulation is applied either inside or on the outside of the duct.

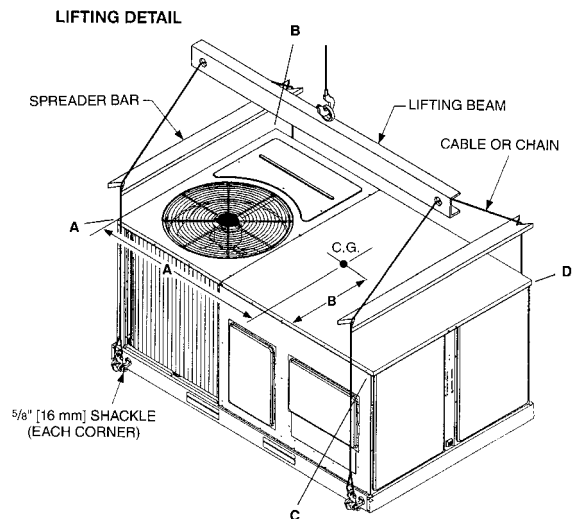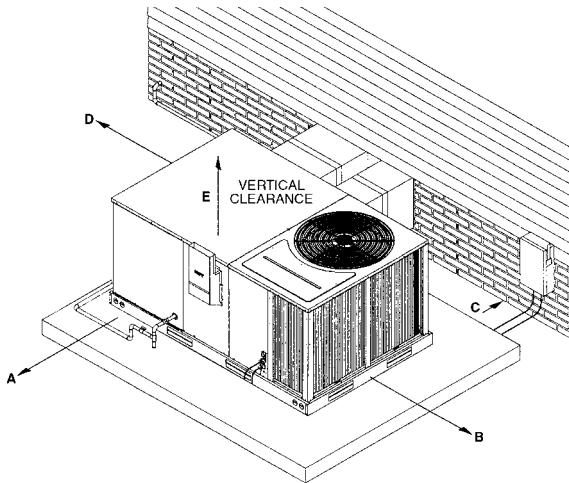

[] Designates Metric Conversions

ACCESSORY EQUIPMENT

Accessory Description	Model Application 3 to 5 Ton [10.6 to 17.6 kW]	Accessory Model No. 3 to 5 Ton [10.6 to 17.6 kW]	Factory Installed 3 to 5 Ton [10.6 to 17.6 kW]
Thermostats	RKNL/RKPL-	See Thermostat Specification Sheet (T11-001)	No
Roofcurb 14"	RKNL/RKPL-	RXKG-CAD14	No
Roofcurb 24"	RKNL/RKPL-	RXKG-CAD24	No
Roofcurb Adapters	RKNL/RKPL-	RXR- BCCDB21 BCCDB22 BCCDB23	No
Economizer with Single Enthalpy ②	RKNL/RKPL-	AXRD-MECM3	Yes
Dual Enthalpy Kit	RKNL/RKPL-	RXR- AV02	No
CO ₂ Sensor Only	RKNL/RKPL-	RXR- AR02	No
Power Exhaust	RKNL/RKPL-	AXR- BGF04C, D, Y	No
Fresh Air Damper Manual	RKNL/RKPL-	AXR- FBA1	No
Fresh Air Damper Motorized	RKNL/RKPL-	AXR- FBB1	No
Rectangular to Round 18" Duct Adapters for Concentric Diffuser	RKNL/RKPL-	RXMC- CB03	No
Rectangular to Round 20" Duct Adapters for Concentric Diffuser	RKNL/RKPL-	RXMC- CB04	No
Concentric Diffuser 18" Step	RKNL/RKPL-	RXR- FA60, FA65	No
Concentric Diffuser 18" Flush	RKNL/RKPL-	RXR- FA70, FA75	No
Rectangular to Round 16" Side	RKNL/RKPL-	RXMC- BB01	No
Louver Kit (3 Sides)	All RKNL/RKPL- Models	AXR- AAD01B	Yes
Time Delay	RKNL/RKPL-	RXMD- B01	Yes
Low Ambient Control to 0°F [-18°C]	RKNL/RKPL-	RXR- Z-B01	Yes
LP Conversion Kits for use with White Rodgers Gas Valve ①	RKNL/RKPL-	RXGJ- EP84W	No
LP Conversion Kits for use with Honeywell Gas Valve ①	RKNL/RKPL-	RXGJ- EP85H	No
Canadian High Altitude Kit (for Natural Gas Only) ①	RKNL/RKPL-	RXR- AH01	No
Freeze Stat	RKNL/RKPL-	RXR- AM04	Yes

*Voltage J = 208/230 VAC-1PH-60HZ D = 460 VAC-3PH-60HZ
 C = 208/230 VAC-3PH-60HZ

NOTES: ① If a particular unit is to be converted to operate on **LP (propane)** for elevations above 2000 ft. in Canada, the existing Natural Gas to LP Conversion Kits for the subject models already contain the necessary orifices and instructions to de-rate the input for 2000-4500 ft. Canadian applications.

② Economizer is designed for downflow or horizontal applications.

[] Designates Metric Conversions

THERMOSTATS



200-Series *
Programmable



300-Series *
Deluxe
Programmable



500-Series *
Communicating/
Programmable

400-Series *
Special Applications/
Programmable

Brand	Descriptor (3 Characters)	Series (3 Characters)	System (2 Characters)	Type (2 Characters)
RHC	- TST	213	UN	MS
RHC=Rheem	TST=Thermostat	200=Programmable 300=Deluxe Programmable 400=Special Applications/ Programmable 500=Communicating/ Programmable	GE=Gas/Electric UN=Universal (AC/HP/GE) MD=Modulating Furnace DF=Dual Fuel CM=Communicating	SS=Single-Stage MS=Multi-Stage

* Photos are representative. Actual models may vary.

For detailed thermostat match-up information,
see specification sheet form number T11-001.

Roofcurb Adapters

Old Models

MEDIUM CABINET (3 TON [11 kW])

(-)SNC, (-)SND, (-)SNE
(-)RGE, (-)RGF, (-)RGG
(-)PNC, (-)PND

LARGE CABINET (3-3 1/2 TON [11-12 kW])

(-)RGE, (-)RGF, (-)RGG,
(-)RGH (3 TON [11 kW])


EXTRA LARGE CABINET (3 1/2-5 TON [12-18 kW])

(-)SNC, (-)SND, (-)SNE
(-)RGE, (-)RGF,
(-)RGG (4-5 TON [14-18 kW])
(-)PNC, (-)PND, (-)RGH
(3 1/2, 4 TON [12-14 kW])

OLD CURB MODEL

ROOFCURB ADAPTER

NEW MODE

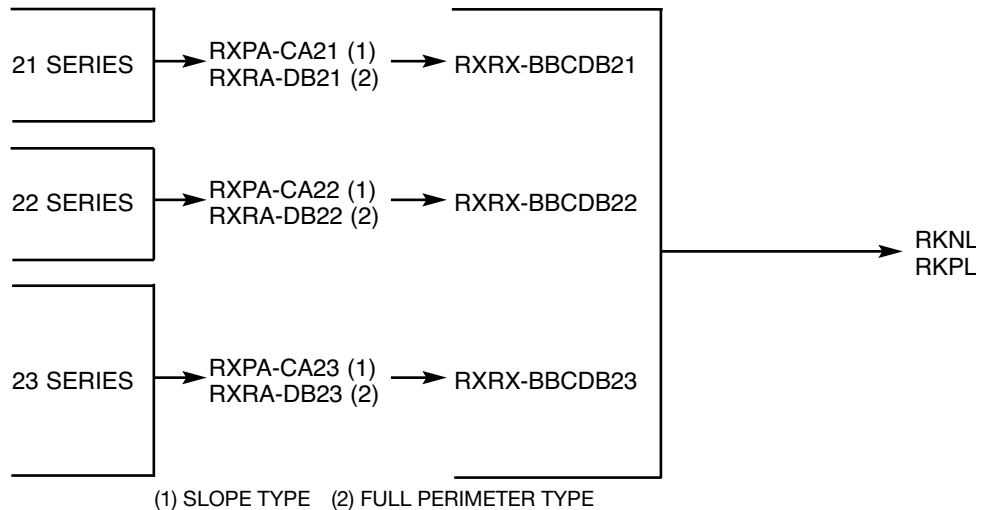

ROOFCURBS (Full Perimeter)

- Rheem's new roofcurb design can be utilized on 3 through 5 ton [10.6-17.6 kW] models.
- Two available heights (14" [356 mm] and 24" [610 mm]) for ALL models.
- Quick assembly corners for simple and fast assembly
- Opening provided in bottom pan to match the "Thru the Curb" electrical connection opening provided on the unit base pan.
- 2" [51 mm] x 4" [102 mm] Nailer provided.
- Insulating panels provided.
- Sealing gasket (28" [711 mm]) provided with Roofcurb.
- Packaged for easy field assembly.

Roofcurb Model	Height of Curb
RXKG-CAD14	14" [356 mm]
RXKG-CAD24	24" [610 mm]

[] Designates Metric Conversions

TYPICAL INSTALLATION

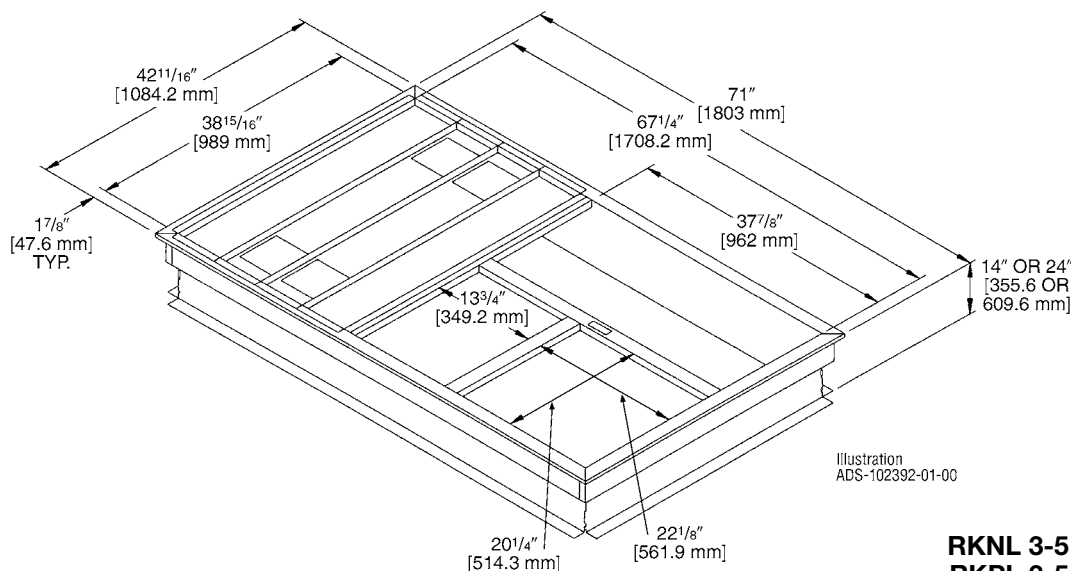
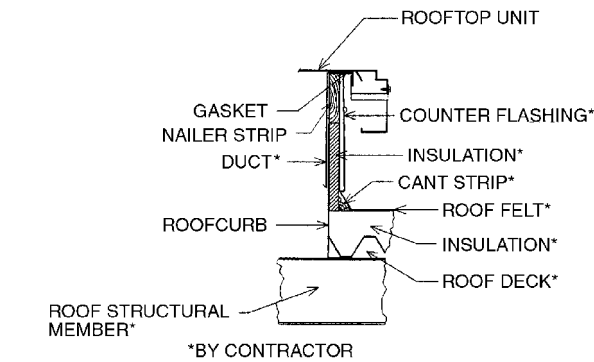
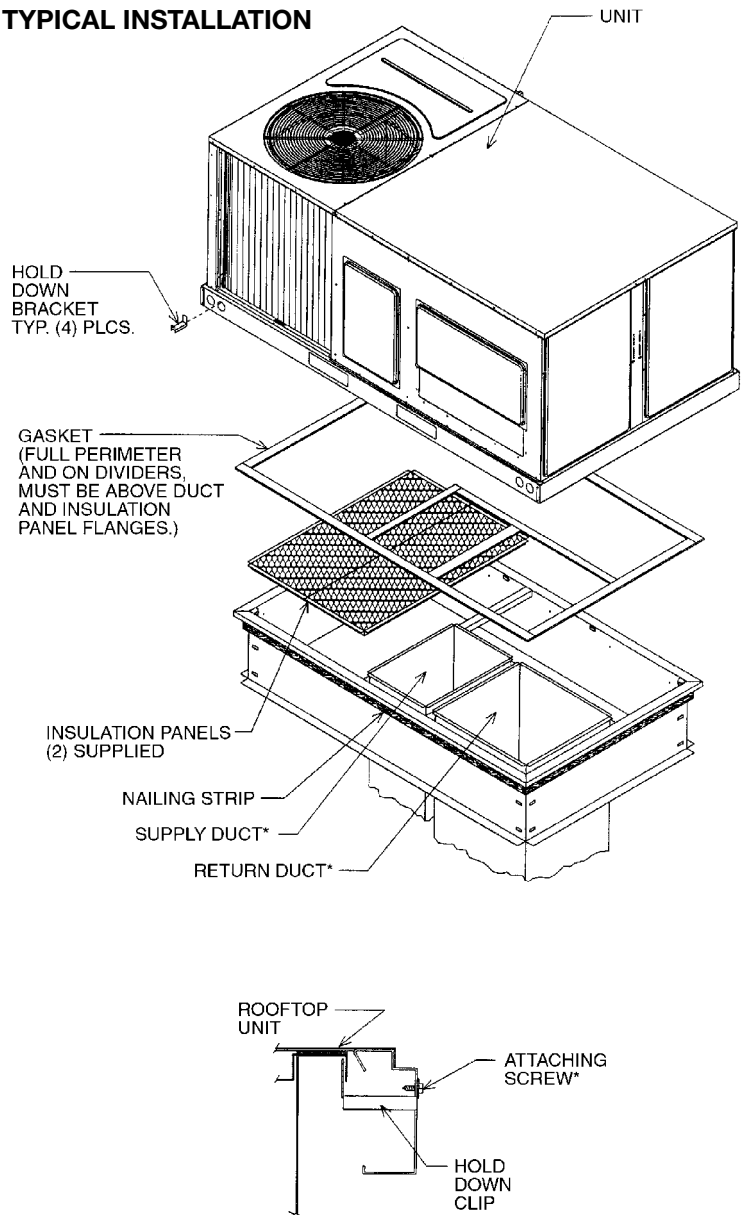


Illustration
ADS-102392-01-00

**ROOFCURB FOR
RKNL 3-5 TON [10.6-17.6 kW] MODELS
RKPL 3-5 TON [10.6-17.6 kW] MODELS**

ECONOMIZERS

AXRD-MECM3—RKNL 3-5 Ton [10.6-17.6 kW] Models
RKPL 3-5 Ton [10.6-17.6 kW] Models

Single Enthalpy (with Barometric Relief)

RXR-AR02—3-5 Ton [10.6-17.6 kW] Models



Dual Enthalpy Kit

RXR-AR02—3-5 Ton [10.6-17.6 kW] Models

Optional CO₂ Sensor

- Features **Honeywell** Analog Controls
- Available factory installed or field accessory
- Gear Driven Direct Drive Actuator
- Fully Modulating (0-100%)
- Low Leakage Dampers
- Horizontal or Downflow Applications
- Slip-In Design for Easy Installations
- Plug-In Polarized 9-pin Electrical Connections
- Pre-configuring—No Field Adjustments Necessary
- Standard Barometric Relief Damper Provided
- Single Enthalpy with Dual Enthalpy upgrade kit
- CO₂ Input Sensor Available (field installed)
- Economizer slips in complete for downflow or horizontal duct applications
- Field assembled hood ships with Economizer
- Optional Remote minimum position (Honeywell #S963B1128) is available from ProStock.
- Field installed power exhaust available.

[] Designates Metric Conversions

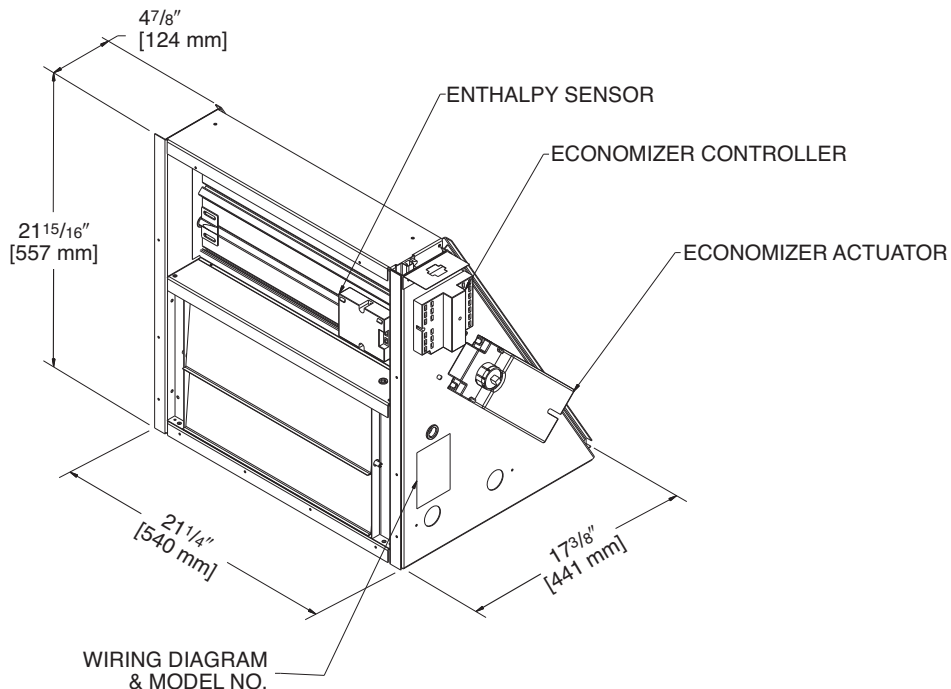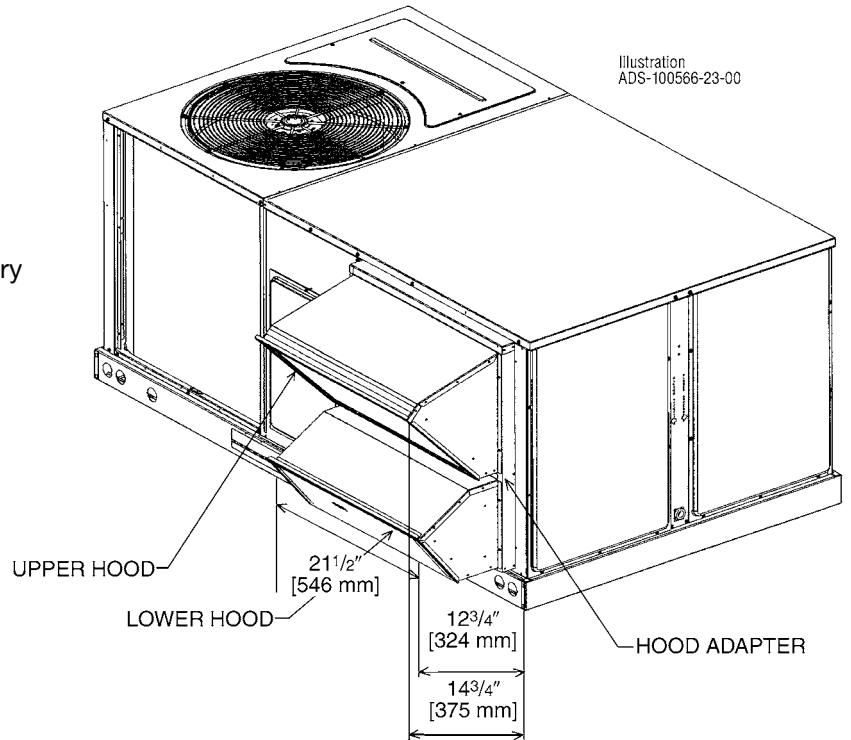

RKNL 3-5 Ton [10.6-17.6 kW] Models
RKPL 3-5 Ton [10.6-17.6 kW] Models


INTEGRAL POWER EXHAUST FOR ECONOMIZER (FIELD INSTALLED ONLY)

AXRX-BGF04C—RKNL-/RKPL- 3-5 Ton [10.6-17.6 kW] Models
208/230 V, 1PH and 3PH, 60 Hz

AXRX-BGF04D—RKNL 3-5 Ton [10.6-17.6 kW] Models & RKPL 3-5 Ton [10.6-17.6 kW] Models
460 V, 3PH, 60 Hz

AXRX-BGF04Y—RKNL 3-5 Ton [10.6-17.6 kW] Models & RKPL 3-5 Ton [10.6-17.6 kW] Models
575V, 3PH, 60 Hz

- For **Honeywell** economizer.
- Downflow or horizontal applications.
- Requires separate 208-230 volt – 1 PH power supply with disconnect or requires separate 460V - 1 PH power supply with disconnect.
- Adjustable switch on economizer, factory preset to energize power exhaust at 95% outside air position.
- Polarized plug connects power exhaust relay to economizer.

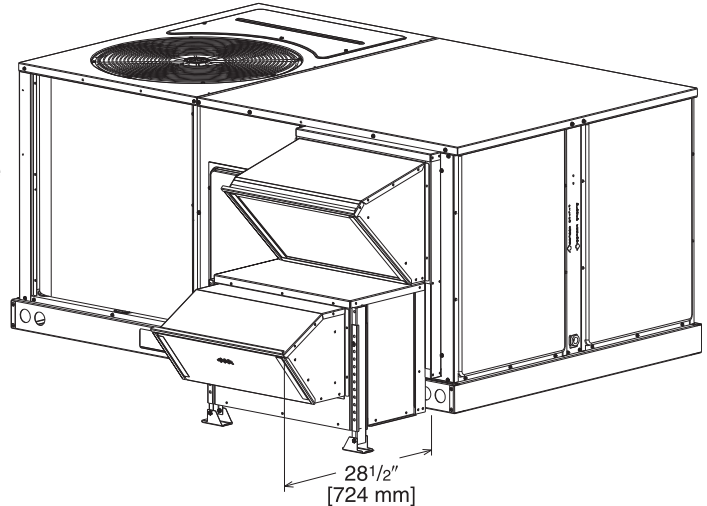

POWER EXHAUST KIT FOR RXRD-MECM(-) ECONOMIZERS

Model No.	No. of Fans	Volts	Phase	Watts (ea.)	High Speed		FLA (ea.)	LRA (ea.)
					CFM ①	RPM		
AXRX-BGF04C	1	208-230	1	1000	2500	1725	4.4	23.7
AXRX-BGF04D	1	460	1	800	2370	1620	1.8	4.1
AXRX-BGF04Y	1	575	1	800	2370	1620	1.5	3.3



① CFM is at 0" W.C. external static pressure.

FRESH AIR DAMPER

RKNL 3-5 Ton [10.6-17.6 kW] Models
RKPL 3-5 Ton [10.6-17.6 kW] Models

AXRF-FBA1 (Manual)

AXRF-FBB1 (Motorized)

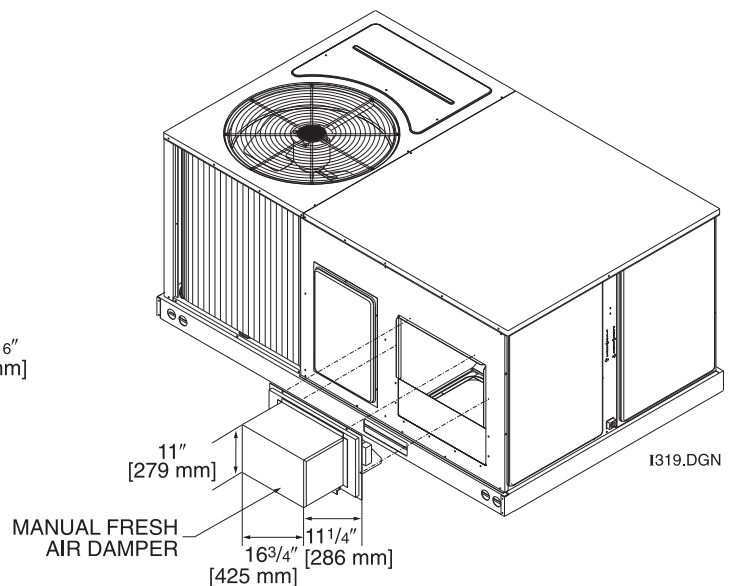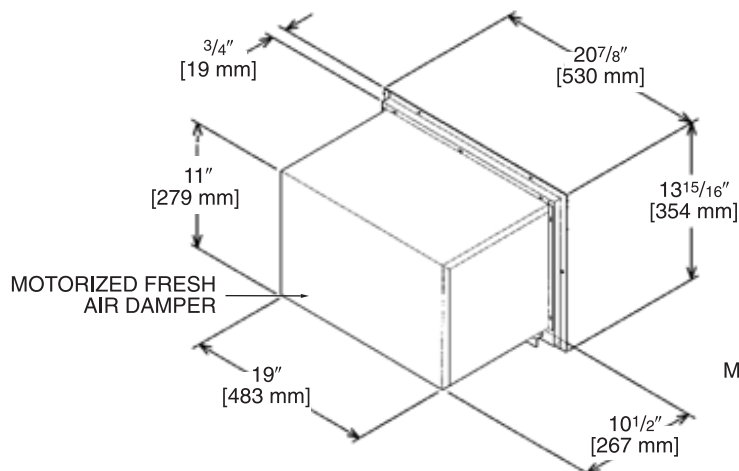


[] Designates Metric Conversions

DUCT ADAPTERS (RKNL 3-5 Ton [10.6-17.6 kW] Models) (RKPL 3-5 Ton [10.6-17.6 kW] Models) Rectangular to Round Transitions (Downflow)

RXMC-CB03 sizes available
 18" [457 mm] fit all units.
 Drops into and secures to
 RXKG- Series Roofcurbs.

**For use with
 Concentric Diffusers.**


[] Designates Metric Conversions

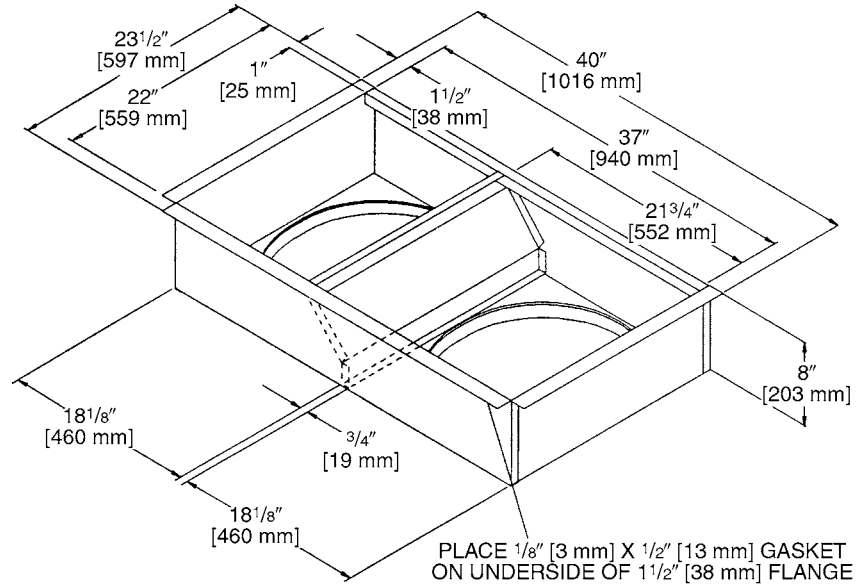

SIDE DISCHARGE CONCENTRIC DIFFUSER

RXRN-FA60 (3 to 6 Ton [10.6 to 21.1 kW] Models)
RXRN-FA65 (3 to 7.5 Ton [10.6 to 26.4 kW] Models)

For Use With Duct Adapter (RXMC)

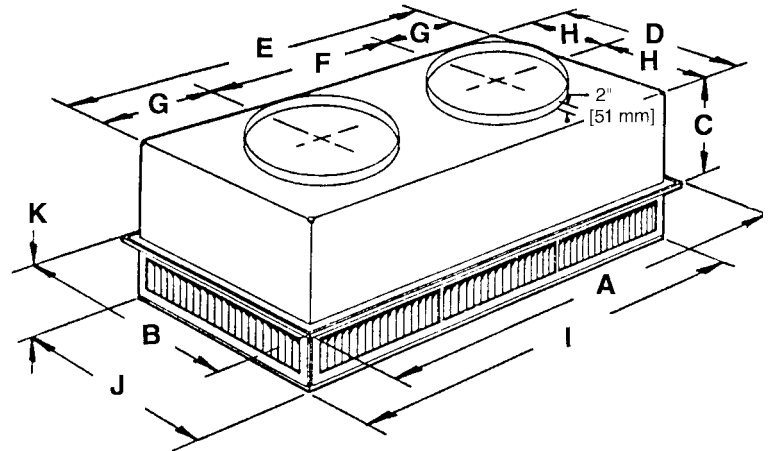

DIMENSIONAL DATA

Model No.	A	B	C	D	E	F	G	H	I	J	K	Duct Size
RXRN-FA60	47 ⁵ / ₈ " [1210 mm]	23 ⁵ / ₈ " [600 mm]	11 ³ / ₈ " [289 mm]	21 ¹ / ₂ " [546 mm]	45 ¹ / ₂ " [1156 mm]	22 ¹ / ₂ " [572 mm]	11 ¹ / ₂ " [292 mm]	10 ³ / ₄ " [273 mm]	45 ¹ / ₂ " [1156 mm]	21 ¹ / ₂ " [546 mm]	7 ¹ / ₈ " [181 mm]	18RD
RXRN-FA65	47 ⁵ / ₈ " [1210 mm]	29 ⁵ / ₈ " [752 mm]	14 ³ / ₈ " [365 mm]	27 ¹ / ₂ " [699 mm]	45 ¹ / ₂ " [1156 mm]	22 ¹ / ₂ " [572 mm]	11 ¹ / ₂ " [292 mm]	13 ³ / ₄ " [349 mm]	45 ¹ / ₂ " [1156 mm]	27 ¹ / ₂ " [699 mm]	8 ¹ / ₈ " [206 mm]	20RD

ENGINEERING DATA


Model No.	CFM [L/s]	Static Pressure	Throw Feet	Neck Vel.	Jet Vel.	Noise Level
RXRN-FA60	1000 [472]	.14	10-17	351	351	20
	1200 [566]	.17	11-18	421	421	20
	1400 [661]	.20	12-19	491	491	20
	1600 [755]	.24	12-20	561	561	20
	1800 [850]	.30	13-21	632	632	20
	2000 [944]	.36	14-23	702	702	20
	2200 [1038]	.40	16-25	772	772	20
RXRN-FA65	2600 [1227]	.17	24-29	669	669	20
	2800 [1321]	.20	25-30	720	720	25
	3000 [1416]	.25	27-33	772	772	25
	3200 [1510]	.31	28-35	623	623	25
	3400 [1605]	.37	30-37	874	874	30

[] Designates Metric Conversions

FLUSH MOUNT CONCENTRIC DIFFUSER

RXRN-FA70 (3 to 6 Ton [10.6 to 21.1 kW] Models)
RXRN-FA75 (3 to 7.5 Ton [10.6 to 26.4 kW] Models)

For Use With Duct Adapter (RXMC)

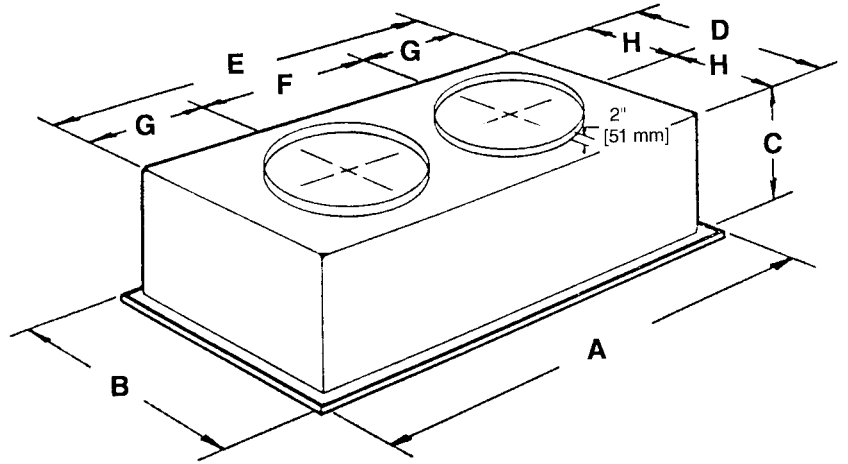

DIMENSIONAL DATA

Model No.	A	B	C	D	E	F	G	H	Duct Size
RXRN-FA70	47 ⁵ / ₈ " [1210 mm]	23 ⁵ / ₈ " [600 mm]	13 ¹ / ₂ " [343 mm]	21" [533 mm]	45" [1143 mm]	22 ¹ / ₂ " [572 mm]	11 ¹ / ₄ " [286 mm]	10 ¹ / ₂ " [267 mm]	18RD
RXRN-FA75	47 ⁵ / ₈ " [1210 mm]	29 ⁵ / ₈ " [752 mm]	16 ⁵ / ₈ " [442 mm]	27" [666 mm]	45" [1143 mm]	22 ¹ / ₂ " [572 mm]	11 ¹ / ₄ " [286 mm]	13 ¹ / ₂ " [343 mm]	20RD

ENGINEERING DATA

Model No.	CFM [L/s]	Static Pressure	Throw Feet	Neck Vel.	Jet Vel.	Noise Level
RXRN-FA70	1000 [472]	.14	15-20	391	694	20
	1200 [566]	.17	16-22	469	833	25
	1400 [661]	.20	17-24	547	972	30
	1600 [755]	.24	18-25	625	1111	30
	1800 [850]	.30	20-28	703	1250	35
	2000 [944]	.36	21-29	781	1389	40
	2200 [1038]	.40	22-30	859	1528	40
RXRN-FA75	2600 [1227]	.17	19-24	663	1294	30
	2800 [1321]	.20	20-28	714	1393	35
	3000 [1416]	.25	21-29	765	1492	35
	3200 [1510]	.31	22-29	616	1592	40
	3400 [1605]	.37	22-30	667	1692	40

[] Designates Metric Conversions

SAMPLE SPECIFICATIONS

Unit shall be completely factory assembled and performance tested to provide the required cooling and heating functions suitable for outdoor installations. Unit shall be UL/cUL listed and rated in accordance to AHRI Standard 210.

CABINET

Unit casing, base pan and framework shall be manufactured of galvanized sheet metal primed and finished with powder paint capable of withstanding a 1000-hour salt spray test per ASTM B 117. Unit interior cabinet surfaces shall be insulated with a minimum 1/2-inch thick foil faced insulation. Access panels shall be easily removable providing access to the blower, filter, heating compartment, and compressor/control box. Unit base rails shall be provided with fork insertion slots and rigging holes. Condensate drain pan shall be of sloped design to conform to ASHRAE 62. Unit shall be supplied ready for vertical airflow and be easily convertible to horizontal airflow at or before installation.

COMPRESSOR(S)

Unit shall be provided with fully hermetic scroll compressor(s) with internally protected safety controls.

COILS

The evaporator and condenser coils shall be fabricated of copper tubes with mechanically bonded aluminum plate fins. They shall be pressure tested prior to assembly into the unit, and electronically leak tested after assembly.

CONDENSER FAN

A single direct drive propeller fan shall discharge air vertically upward. The fan motor shall be permanently lubricated and have built-in overload protection.

EVAPORATOR BLOWER

A single, double inlet, centrifugal wheel shall rotate in permanently lubricated ball bearings. The wheel shall be made from steel with corrosion resistant finish and shall be statically and dynamically balanced.

HEATING SECTION

Heat exchanger shall be of the tubular type made of aluminized steel. Burners shall be of the in-shot type. Unit shall be equipped with an integrated direct spark ignition control board with built-in diagnostics feature. Safeties to include limit, lock-out, and flame roll-out switches.

ACCESSORIES

ROOF CURB

Curb shall be full perimeter type, complying with the standards of the National Roofing Contractors Association. Design shall provide for drop-in of supply and return ducts prior to setting unit, and include an insulating panel for the rest of the curb area.

ECONOMIZER

Economizer shall be completely assembled for field installation. Unit shall include all controls and dampers including the barometric relief damper. Shall be offered for both vertical and horizontal applications.

MANUAL FRESH AIR DAMPER

Damper shall consist of damper and rainhood which is manually preset to admit up to 35% of outside air for field installation.

MOTORIZED FRESH AIR DAMPER

Damper shall consist of motor, damper, and rainhood which can admit up to 35% of outside air for field installation.

PRESSURE CONTROLS

High and low pressure controls shall be included for field or factory installation.

LOW AMBIENT CONTROL


Low ambient control shall be provided to cycle the condenser fan in response to condensing pressure and allow operation to 0 degrees F. The option shall be field or factory installed.

TIME DELAY CONTROL

Time delay control shall be provided to prevent the compressor from restarting 5 minutes after shutdown. The control shall be field or factory installed.

LOUVER PANEL KITS

Field or factory installed louver kits shall be provided for condenser coil protection against hail or flying debris.

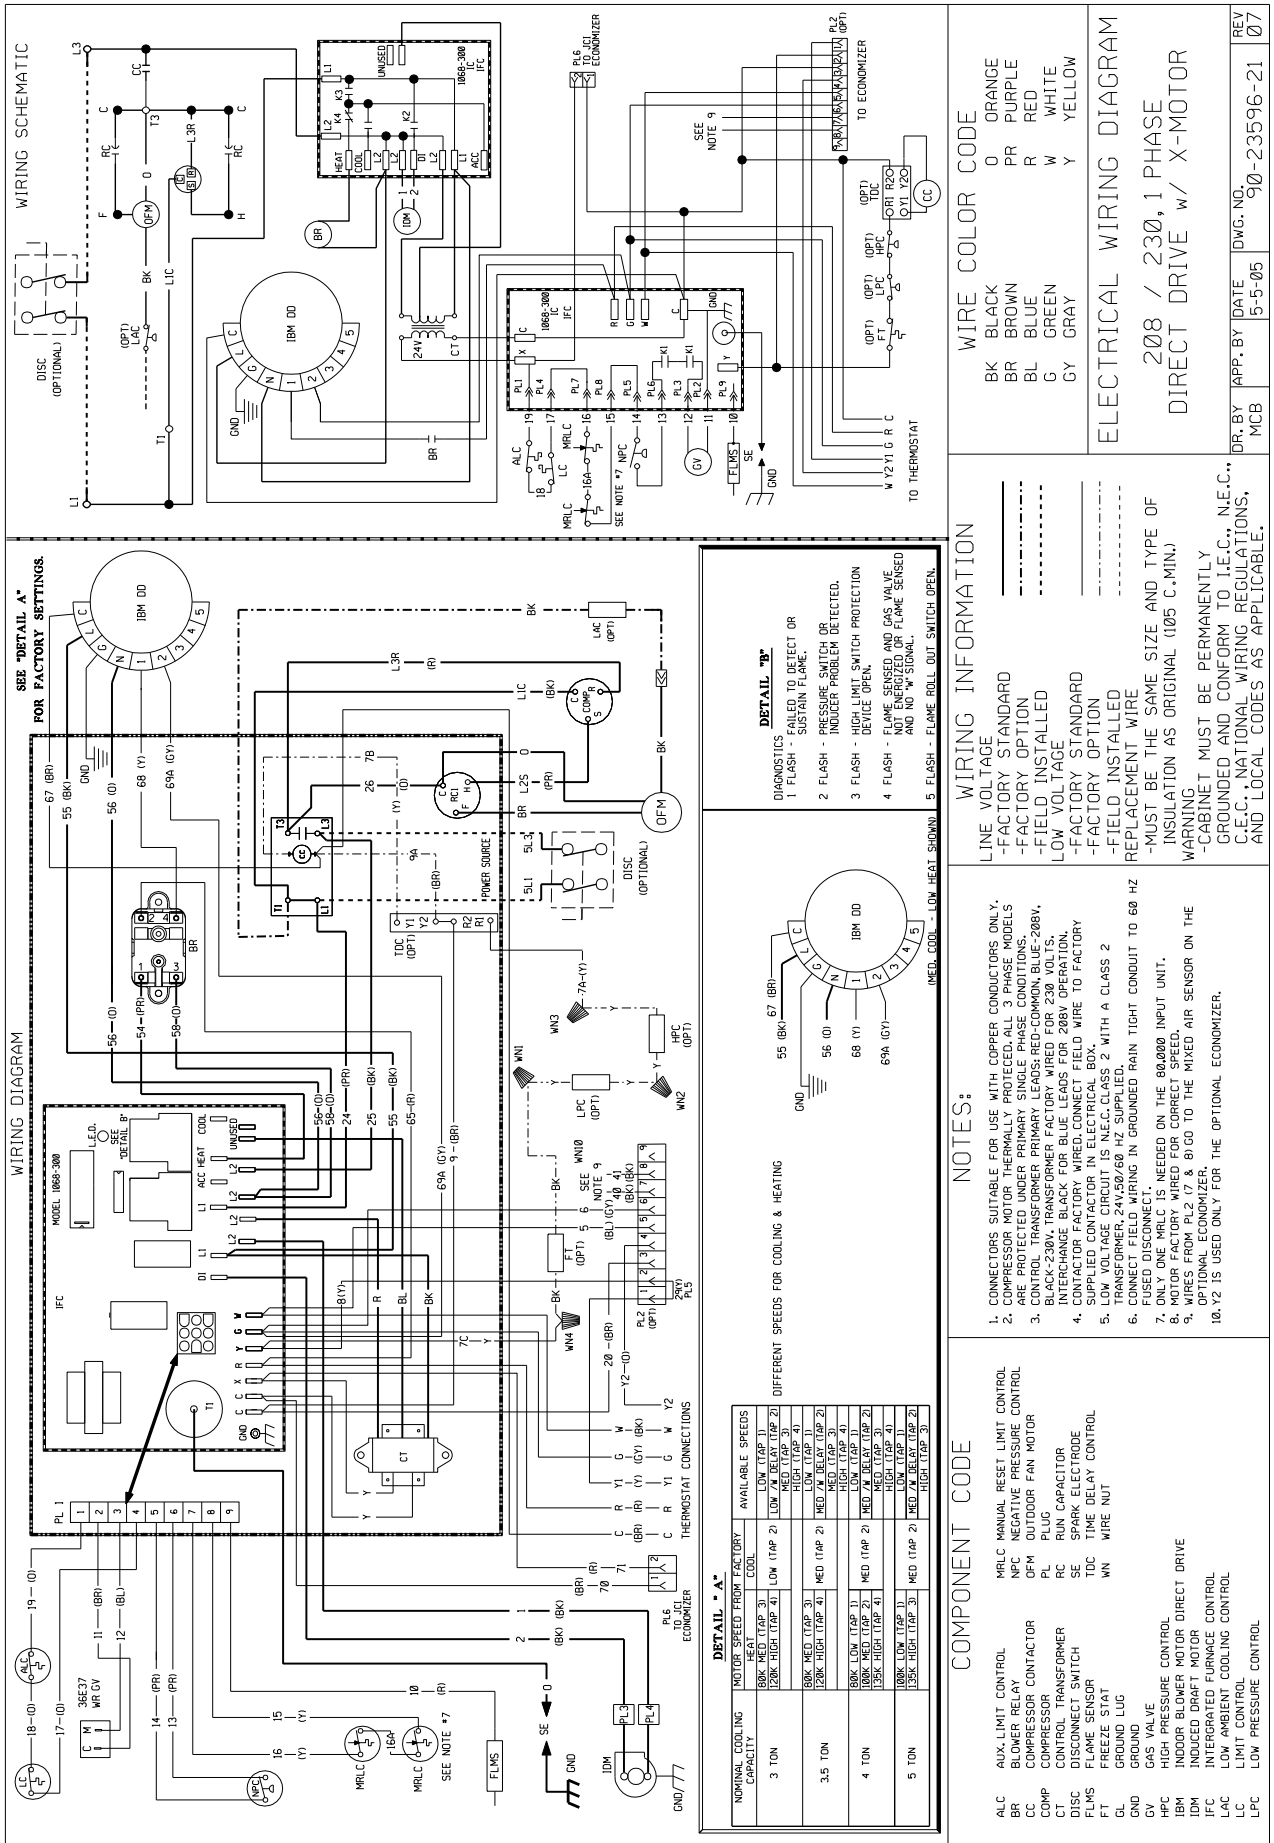

WIRING SCHEMATIC

SEE "DETAIL A" FOR FACTORY SETTINGS

WIRING DIAGRAM

DETAIL "B"

DIFFERENT SPEEDS FOR COOLING & HEATING

COMPONENT CODE

WIRE COLOR CODE

ELECTRICAL WIRING DIAGRAM

NOMINAL COOLING CAPACITY	MOTOR SPEED THROT FACTORY COOL	AVAILABLE SPEEDS
3 TON	80K MED (TAP 3)	LOW (TAP 1)
	120K HIGH (TAP 4)	LOW / 7A DELAY (TAP 2)
		HIGH (TAP 4)
3.5 TON	80K MED (TAP 3)	LOW (TAP 1)
	120K HIGH (TAP 4)	MED (TAP 2)
		HIGH (TAP 4)
4 TON	80K LOW (TAP 3)	LOW (TAP 1)
	120K HIGH (TAP 4)	MED / 7A DELAY (TAP 2)
		HIGH (TAP 4)
5 TON	100K LOW (TAP 3)	LOW (TAP 1)
	150K HIGH (TAP 4)	MED (TAP 2)
		HIGH (TAP 4)

COMPONENT	CODE
AUX. LIMIT CONTROL	MRLC
BLOWER RELAY	NPC
COMPRESSOR	DFM
CONTROL TRANSFORMER	PL
DISCONNECT SWITCH	RC
FLAME SENSOR	SE
FREZE START	TDC
GAS VALVE	WN
GND	WIRE NOT
GROUND LUG	
INDOOR BLOWER MOTOR	
INDUCED DRAFT MOTOR	
INTERGRATED FURNACE CONTROL	
LOW AMBIENT COOLING CONTROL	
LIMIT CONTROL	
LOW PRESSURE CONTROL	

NOTES:

- CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
- ARE PROTECTED UNDER PRIMARY SINGLE PHASE CONDITIONS.
- CONTROL TRANSFORMER PRIMARY LEADS: RED-COMMON, BLUE-208V, BLACK-230V, TRANSFORMER FACTORY WIRE FOR 230 VOLTS.
- INTERCHANGE BLACK FOR BLUE LEADS FOR 208V OPERATION.
- SUPPLIED FACTORY WIRE, CONNECT FIELD WIRE TO FACTORY CONTROL FACTORY IN ELECTRICAL BOX.
- LOW VOLTAGE CIRCUIT IS NEARLY CLASS 2 WITH A CLASS 2 WIRE WIRING IN GROUNDING RAIN TIGHT CONDUIT TO 60 HZ FUSED DISCONNECT.
- ONLY ONE MRLC IS NEEDED ON THE 80,000 INPUT UNIT.
- MOTOR FACTORY WIRE FOR CORRECT SPEED.
- WIRES FROM PL2 (7 & 8) TO THE MIXED AIR SENSOR ON THE OPTIONAL ECONOMIZER.
- 10, 12 IS USED ONLY FOR THE OPTIONAL ECONOMIZER.

WIRING INFORMATION

LINE VOLTAGE

- FACTORY STANDARD
- FACTORY OPTION
- FIELD INSTALLED
- FACTORY STANDARD
- FACTORY OPTION
- FIELD INSTALLED
- REPLACEMENT WIRE

MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C.MIN.)

WARNING

- CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C. N.E.C. C.E.C. NATIONAL WIRING REGULATIONS, AND LOCAL CODES AS APPLICABLE.

WIRE COLOR CODE

BK	BLACK	O	ORANGE
BR	BROWN	PR	PURPLE
BL	BLUE	R	RED
G	GREEN	W	WHITE
GY	GRAY	Y	YELLOW


ELECTRICAL WIRING DIAGRAM

208 / 230, 1 PHASE
DIRECT DRIVE w/ X-MOTOR

DR. BY MCB APP. BY DATE 5-5-05 DWG. NO. 910-23596-21 REV 07



Air

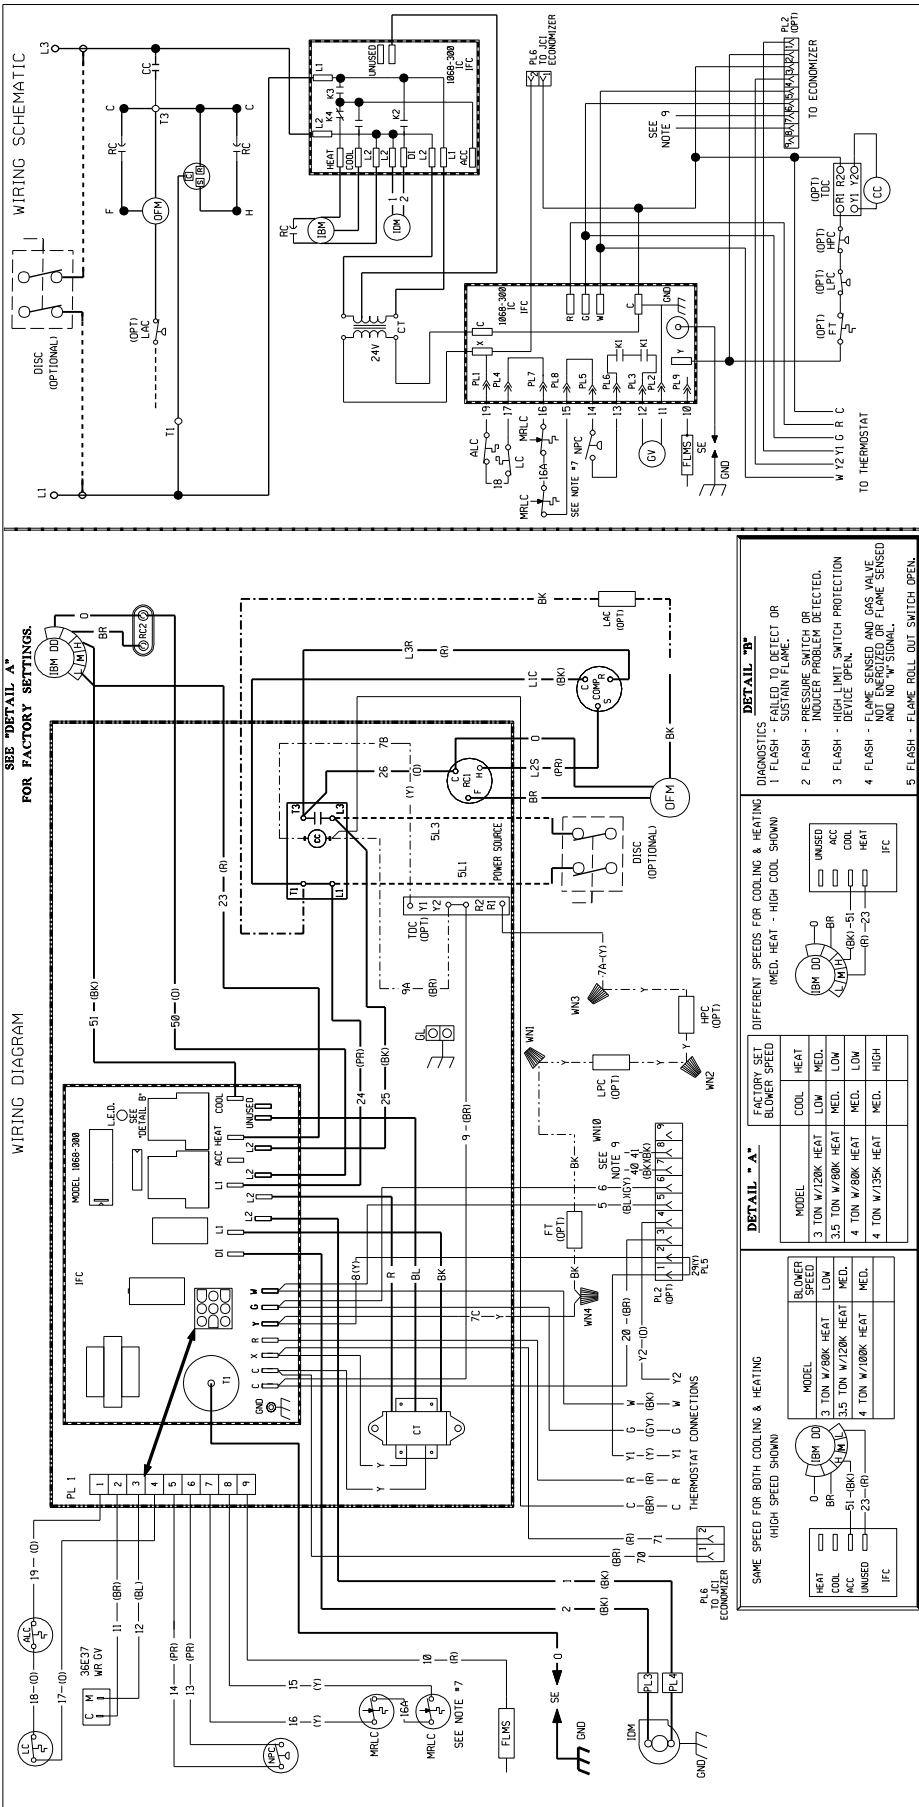

COMPONENT CODE

AUX LIMIT CONTROL
CC COMPRESSOR CONTACTOR
CDMP COMPRESSOR
CT CONTROL TRANSFORMER
DISC DISCONNECT SWITCH
FLMS FLEAZE STAT
FT FUSE
GL GROUND LUG
GV GAS VALVE
HPC HIGH PRESSURE CONTROL
IBK INDOOR BLOWER MOTOR DIRECT DRIVE
IBK INDOOR BLOWER MOTOR
IFC INTEGRATED FURNACE CONTROL
LAC LOW AMBIENT COOLING CONTROL
LC LIMIT CONTROL
LPC LOW PRESSURE CONTROL
MLRC MANUAL RESET LIMIT CONTROL

WIRE COLOR CODE

O --- BLACK
BK --- BLACK
BR --- BROWN
BL --- BLUE
G --- GREEN
GY --- GRAY
OR --- ORANGE
PR --- PURPLE
R --- RED
W --- WHITE
Y --- YELLOW

WIRING INFORMATION

LINE VOLTAGE
-FACTORY STANDARD
-FACTORY OPTION
-FIELD INSTALLED
LOW VOLTAGE
-FACTORY STANDARD
-FACTORY OPTION
-FIELD INSTALLED
REPLACE WIRE
-MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C.MIN.)
WARNING
-CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C., NATIONAL WIRING REGULATIONS, AND LOCAL CODES AS APPLICABLE.

NOTES:



- CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
- COMPRESSOR MOTOR THERMALLY PROTECTED. ALL 3 PHASE MODELS ARE PROTECTED UNDER PRIMARY SINGLE PHASE CONDITIONS.
- INDOOR BLOWER MOTOR CAPACITORS - COOL - BLUE-288V, HEAT - BROWN-288V, W/15K HEAT - 200V.
- INTERCHANGE BLACK FOR BLUE LEADS FOR 288V OPERATION.
- CONTACTOR FACTORY WIRE. CONNECT FIELD WIRE TO FACTORY SUPPLIED CONTACTOR IN ELECTRICAL BOX.
- LOW VOLTAGE CIRCUIT IS N.E.C. CLASS 2 WITH A CLASS 2 TRANSFORMER, 24V/50/60 HZ SUPPLIED.
- FUSED DISCONNECT SWITCHING IN GROUNDED RAIN TIGHT CONDUIT TO 60 HZ.
- ONLY ONE MLRC IS NEEDED ON THE 80/8000 INPUT UNIT.
- MOTOR FACTORY WIRE FOR CORRECT SPEED.
- WIRES FROM PL2 (7 & 8) GO TO THE MIXED AIR SENSOR ON THE OPTIONAL ECONOMIZER.
- 10, Y2 IS USED ONLY FOR THE OPTIONAL ECONOMIZER.

ELECTRICAL WIRING DIAGRAM

208 / 230, 1 PHASE
DIRECT DRIVE

DR. BY MCB APP. BY DATE DWG. NO. REV

5-23-05 90-23596-23 02

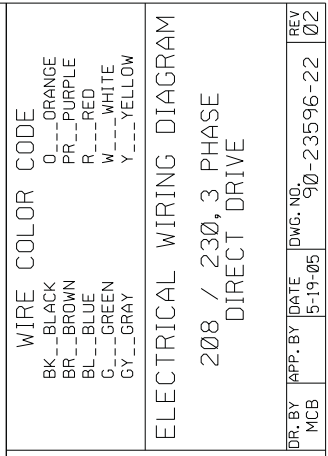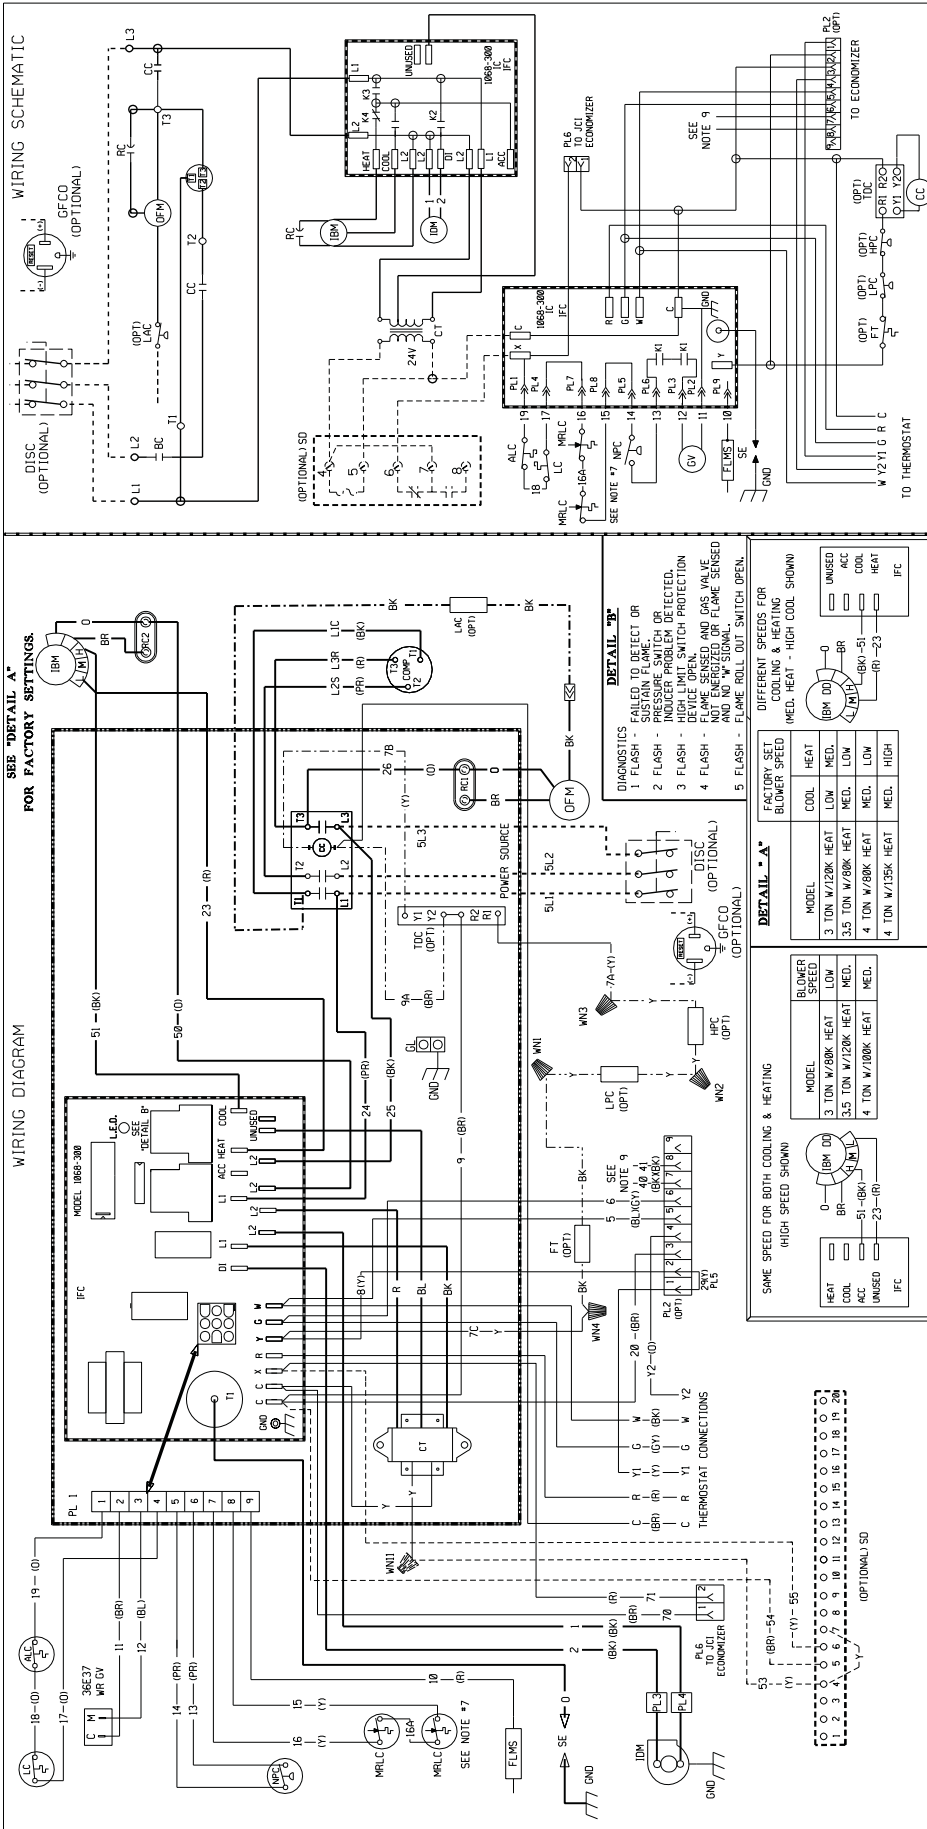

WIRING INFORMATION

LINE VOLTAGE STANDARD

- FACTORY STANDARD
- FACTORY OPTION
- FIELD INSTALLED
- LOW VOLTAGE
- FACTORY STANDARD
- FACTORY OPTION
- FIELD INSTALLED
- REPLACEMENT WIRE

MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C.MIN.)

WARNING

-CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C. NATIONAL WIRING REGULATIONS, AND LOCAL CODES AS APPLICABLE.

NOTES:

- CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
- COMPRESSOR MOTOR THERMALLY PROTECTED. ALL 3 PHASE MODELS ARE PROTECTED UNDER PRIMARY SINGLE PHASE CONDITIONS.
- CONTROL TRANSFORMER PRIMARY LEADS: RED-COMMON, BLUE-208V, BLACK-230V. TRANSFORMER FACTORY WIRED FOR 230 VOLTS. INTERCHANGE BLACK FOR BLUE LEADS FOR 208V OPERATION.
- CONTACTOR FACTORY WIRED. CONNECT FIELD WIRE TO FACTORY SUPPLIED CONTACTOR IN ELECTRICAL BOX.
- LOW VOLTAGE CIRCUIT IS N.E.C. CLASS 2 WITH A CLASS 2 TRANSFORMER, 24V, 50/60 HZ SUPPLIED.
- CONNECT FIELD WIRING IN GROUNDED RAIN TIGHT CONDUIT TO 60 HZ FUSED DISCONNECT.
- ONLY ONE MRLC IS NEEDED ON THE 80,000 INPUT UNIT.
- MOTOR FACTORY WIRED FOR CORRECT SPEED.
- WIRES FROM PL 2 (7 & 8) GO TO THE MIXED AIR SENSOR ON THE OPTIONAL ECONOMIZER.
- Y2 IS USED ONLY FOR THE OPTIONAL ECONOMIZER.



COMPONENT CODE

ALC	AUX LIMIT CONTROL	MRLC	MANUAL RESET LIMIT CONTROL
CC	COMPRESSOR CONTACTOR	NPC	NEGATIVE PRESSURE CONTROL
COMP	COMPRESSOR	OFM	OUTDOOR FAN MOTOR
CT	CONTROL TRANSFORMER	PL	PLUG
DISC	DISCONNECT SWITCH	RC	RUN CAPACITOR
FLMS	FLAME SENSOR	SE	SPARK DETECTOR
FT	FREEZE STAT	SO	SPOKE ELECTRODE
GFCO	GROUND FAULT CONVENIENCE OUTLET	TD	TIME DELAY CONTROL
GL	GROUND LUG	WN	WIRE NUT
GN	GROUND		
GV	GAS VALVE		
HPC	HIGH PRESSURE CONTROL		
IBM	INDOOR BLOWER MOTOR DIRECT DRIVE		
IBM	INDOOR BLOWER MOTOR		
IFC	INDUCED DRAFT FURNACE CONTROL		
LAC	LOW AMBIENT COOLING CONTROL		
LC	LIMIT CONTROL		
LPC	LOW PRESSURE CONTROL		

ELECTRICAL WIRING DIAGRAM

208 / 230, 3 PHASE DIRECT DRIVE

DR. BY: MCB
APP. BY: DATE: 5-19-05
DWG. NO.: 90-23596-22
REV: 02

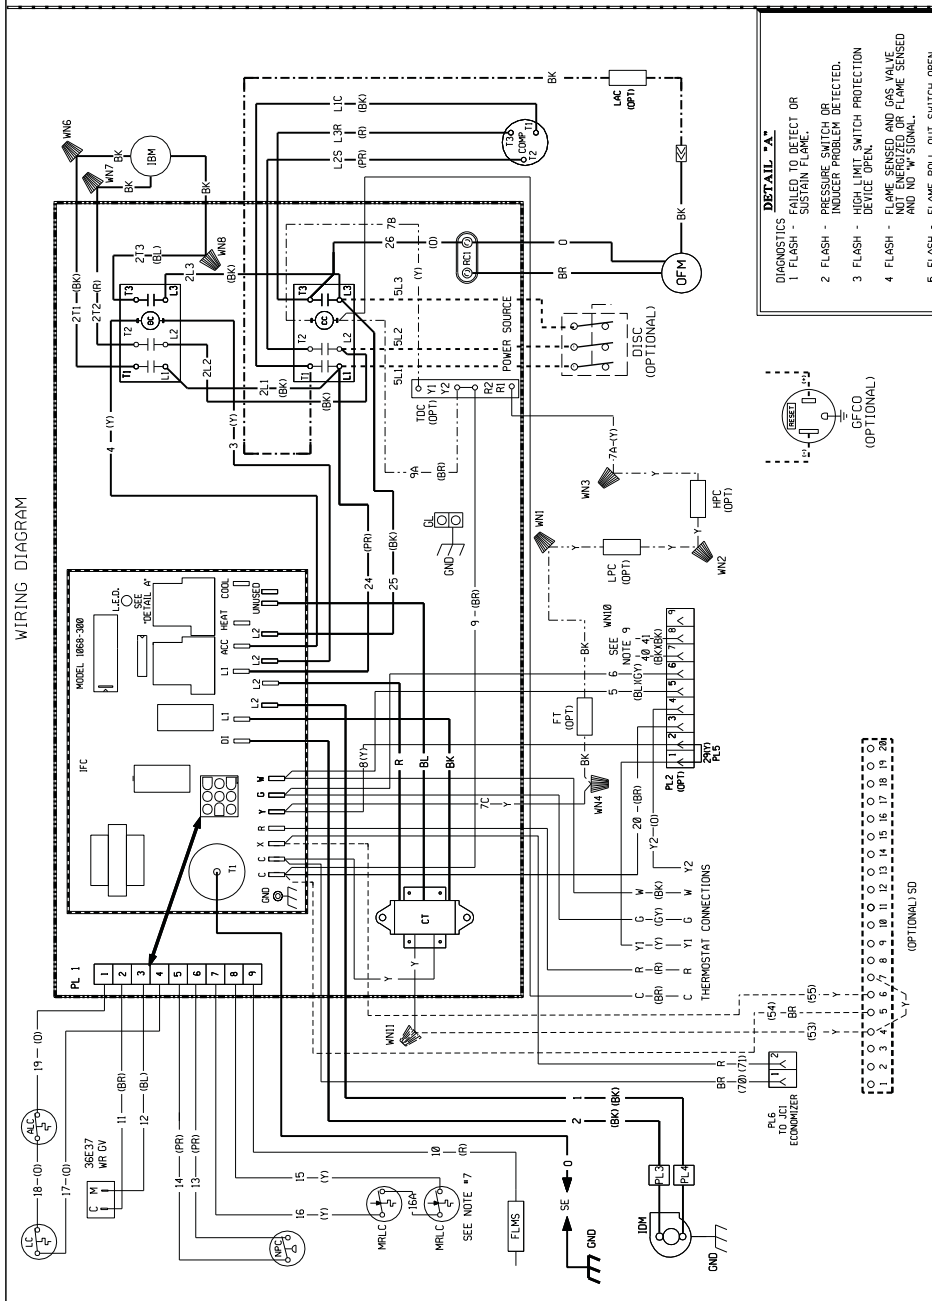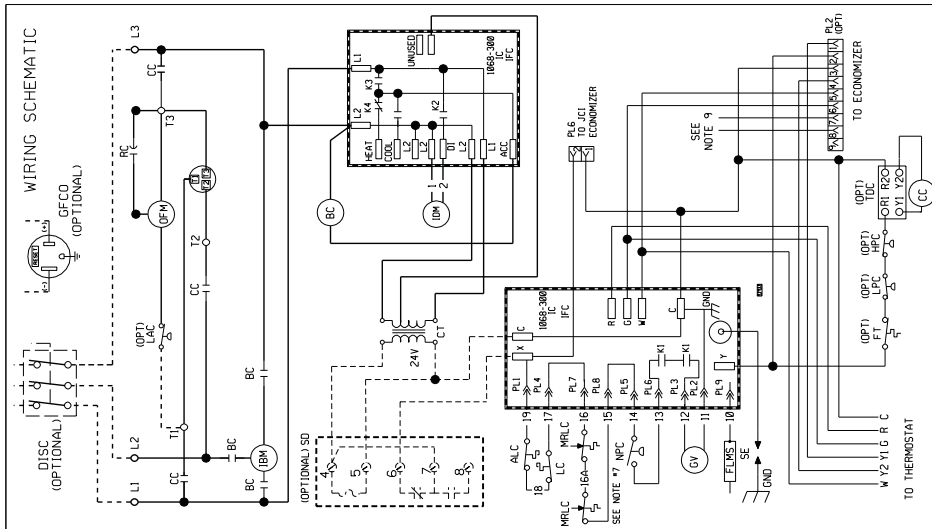

DETAIL 'A'
 DIAGNOSTICS FAILED TO DETECT OR SUSTAIN FLAME.
 1 FLASH - PRESSURE SWITCH OR INDUCER PROBLEM DETECTED.
 2 FLASH - HIGH LIMIT SWITCH PROTECTION DEVICE OPEN.
 3 FLASH - FLAME SENSED AND GAS VALVE AND NO. 1 SIGNAL.
 4 FLASH - FLAME ROLL OUT SWITCH OPEN.
 5 FLASH - FLAME ROLL OUT SWITCH OPEN.

WIRE COLOR CODE

BK	BLACK
BR	BROWN
BL	BLUE
G	GREEN
GY	GRAY
O	ORANGE
PR	PURPLE
R	RED
W	WHITE
Y	YELLOW

ELECTRICAL WIRING DIAGRAM
 208 / 230, 3 PHASE, 60 HZ
 BELT DRIVE

WIRING INFORMATION

LINE VOLTAGE
 -FACTORY STANDARD
 -FACTORY OPTION
 -FIELD INSTALLED
 -LOW VOLTAGE
 -FACTORY STANDARD
 -FACTORY OPTION
 -FIELD INSTALLED

MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C. MIN.)

WARNING
 -CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C., NATIONAL WIRING REGULATIONS, AND LOCAL CODES AS APPLICABLE.







NOTES:

- CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
- COMPRESSOR MOTOR THERMALLY PROTECTED. ALL 3 PHASE MODELS ARE PROTECTED UNDER PRIMARY SINGLE PHASE CONDITIONS.
- CONTROL TRANSFORMER PRIMARY LEADS: RED-COMMON, BLUE-208V, BLACK-230V, TRANSFORMER FACTORY WIRE FOR 230 VOLTS. INTERCHANGE BLACK FOR BLUE LEADS FOR 208V OPERATION.
- CONTACTOR FACTORY WIRE, CONNECT FIELD WIRE TO FACTORY SUPPLIED CONTACTOR IN ELECTRICAL BOX.
- LOW VOLTAGE CIRCUIT IS N.E.C. CLASS 2 WITH A CLASS 2 TRANSFORMER, 24V/50/60 HZ SUPPLIED.
- CONNECT FIELD WIRING IN GROUNDED RAIN TIGHT CONDUIT TO 60 HZ FUSED DISCONNECT.
- ONLY ONE MRLC IS NEEDED ON THE 80/000 INPUT UNIT.
- MOTOR FACTORY WIRE FOR CORRECT SPEED.
- WIRES FROM PL.2 (7 & 8) TO THE MIXED AIR SENSOR ON THE OPTIONAL ECONOMIZER.
- Y.2 IS USED ONLY FOR THE OPTIONAL ECONOMIZER.

COMPONENT CODE

ALC	AUX. LIMIT CONTROL
BLC	BLU-LED CONTROL
CC	COMPRESSOR CONTACTOR
CDMP	COMPRESSOR MANUAL PRESSURE LIMIT CONTROL
CT	CONTROL TRANSFORMER
DISC	DISCONNECT SWITCH
FLMS	FLAME SENSOR
FT	FREEZE STAT
GF	GROUND FAULT
GFCC	GROUND FAULT CONTROL
GL	GROUND LUG
GN	GROUND
GV	GAS VALVE
HPC	HIGH PRESSURE CONTROL
IBM	INDUCER BLOWER MOTOR DIRECT DRIVE
IBK	INDUCER BLOWER MOTOR CONTROL
ILC	INDUCER LIMIT CONTROL
LAC	LOW AMBIENT COOLING CONTROL

DR. BY: MCB
 APP. BY: MCB
 DATE: 5-23-05
 DWG. NO.: 90-23596-26
 REV: 04

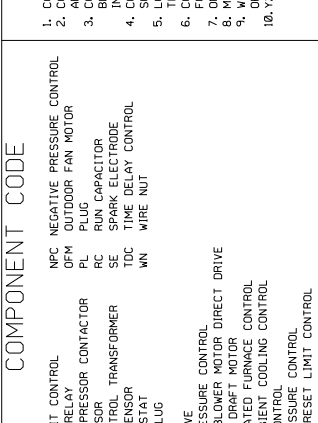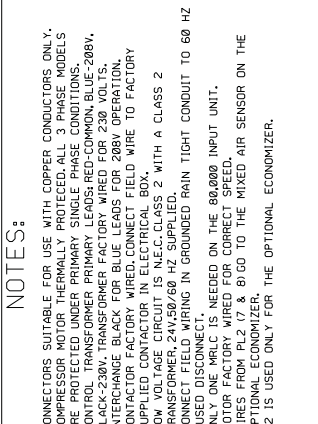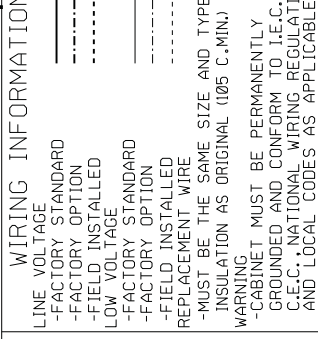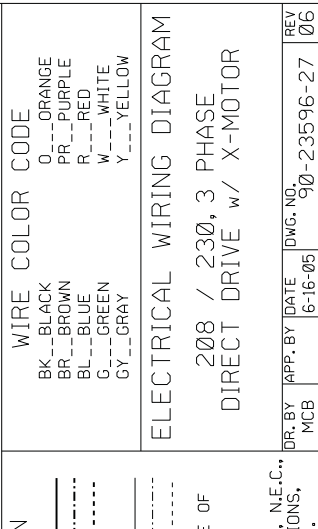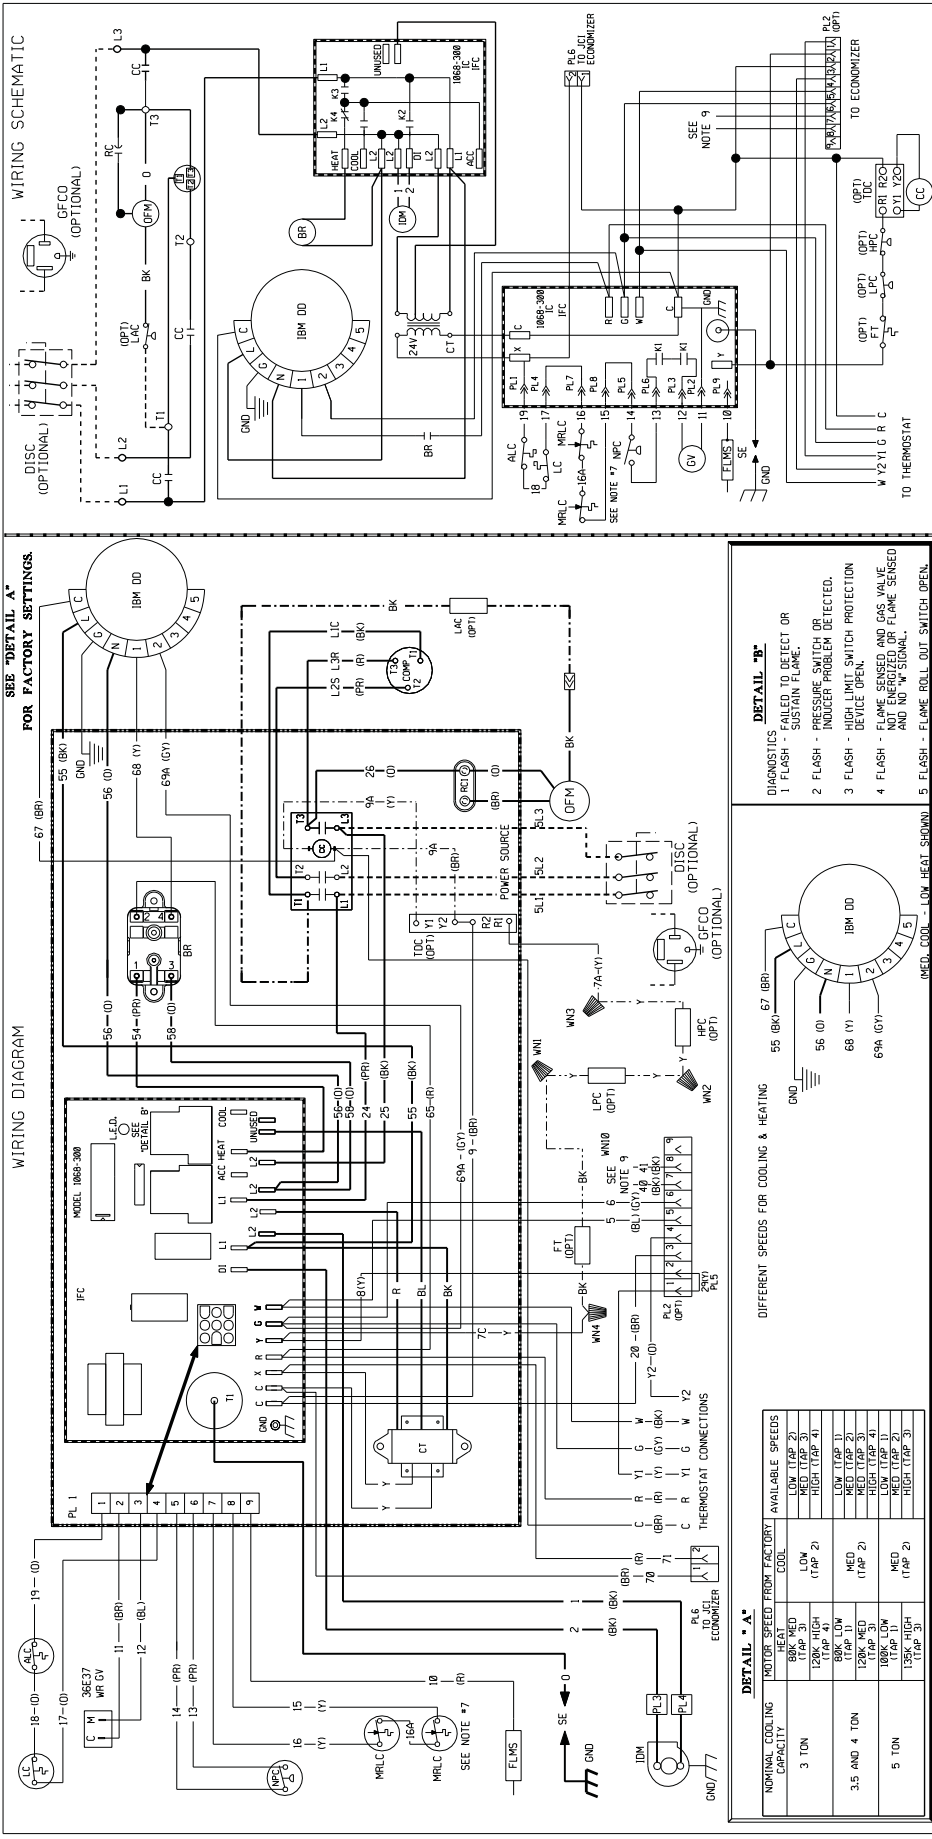

COMPONENT CODE

ALC	AUX. LIMIT CONTROL
BR	BLOWER RELAY
COMP	COMPRESSOR CONTACTOR
CT	CONTROL TRANSFORMER
FLMS	FLAME SENSOR
GL	GROUND LUG
GND	GROUND
GV	GAS VALVE
IBM	HIGH PRESSURE CONTROL
IDM	INDOOR BLOWER MOTOR DIRECT DRIVE
IFC	INDUCED DRAFT MOTOR
LAC	INTEGRATED FURNACE CONTROL
L2C	LOW AMBIENT COOLING CONTROL
L3C	LIMIT CONTROL
LPC	LOW PRESSURE CONTROL
MRLC	MANUAL RESET LIMIT CONTROL

WIRING INFORMATION

LINE VOLTAGE
-FACTORY STANDARD
-FACTORY OPTION
-FIELD INSTALLED
LOW VOLTAGE
-FACTORY STANDARD
-FACTORY OPTION
-FIELD INSTALLED

REPLACEMENT WIRE
-MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C.MIN.)
-WARNING
-CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C., NATIONAL WIRING REGULATIONS, AND LOCAL CODES AS APPLICABLE.

NOTES:

- CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
- COMPRESSOR MOTOR THERMALLY PROTECTED. ALL 3 PHASE MODELS ARE PROTECTED UNDER PRIMARY SINGLE PHASE CONDITIONS.
- CONTROL TRANSFORMER PRIMARY LEADS: RED-COMMON, BLUE-208V, BLACK-230V. TRANSFORMER FACTORY WIRED FOR 230 VOLTS. (BLACK-208V, BLUE-COMMON, RED-230V OPERATIONAL)
- CONTRACTOR FACTORY WIRING CONNECTIONS: FIELD WIRE TO FACTORY SUPPLIED CONTACTOR IN ELECTRICAL BOX.
- LOW VOLTAGE CIRCUIT IS N.E.C. CLASS 2 WITH A CLASS 2 TRANSFORMER, 24V, 50/60 HZ SUPPLIED.
- FUSED DISCONNECT.
- ONLY ONE MRLC IS WEEDED ON THE 80,000 INPUT UNIT.
- WIRING FROM PL2 (7 & 8) TO THE MIXED AIR SENSOR ON THE OPTIONAL ECONOMIZER.
- WIRING FROM PL2 (7 & 8) TO THE MIXED AIR SENSOR ON THE OPTIONAL ECONOMIZER.
- Y2 IS USED ONLY FOR THE OPTIONAL ECONOMIZER.

DIAGNOSTICS

- FLASH - SILENTER TO DETECT OR SUSPECT SYSTEM FLAME.
- FLASH - INDICATOR WHEN FLAME PROTECTION INDICATOR PROBLEM IS DETECTED.
- FLASH - SERVICE PANEL.
- FLASH - NOT ENERGIZED OR FLAME SENSED AND NO "M" SIGNAL.
- FLASH - FLAME ROLL OUT SWITCH OPEN.


WIRE COLOR CODE

BK	BLACK	O	ORANGE
BR	BROWN	PR	PURPLE
BL	BLUE	R	RED
G	GREEN	W	WHITE
GY	GRAY	Y	YELLOW

ELECTRICAL WIRING DIAGRAM

208 / 230V, 3 PHASE
DIRECT DRIVE w/ X-MOTOR

DR. BY	APP. BY	DATE	DWG. NO.	REV
MCB	MCB	6-16-05	90-23596-27	06

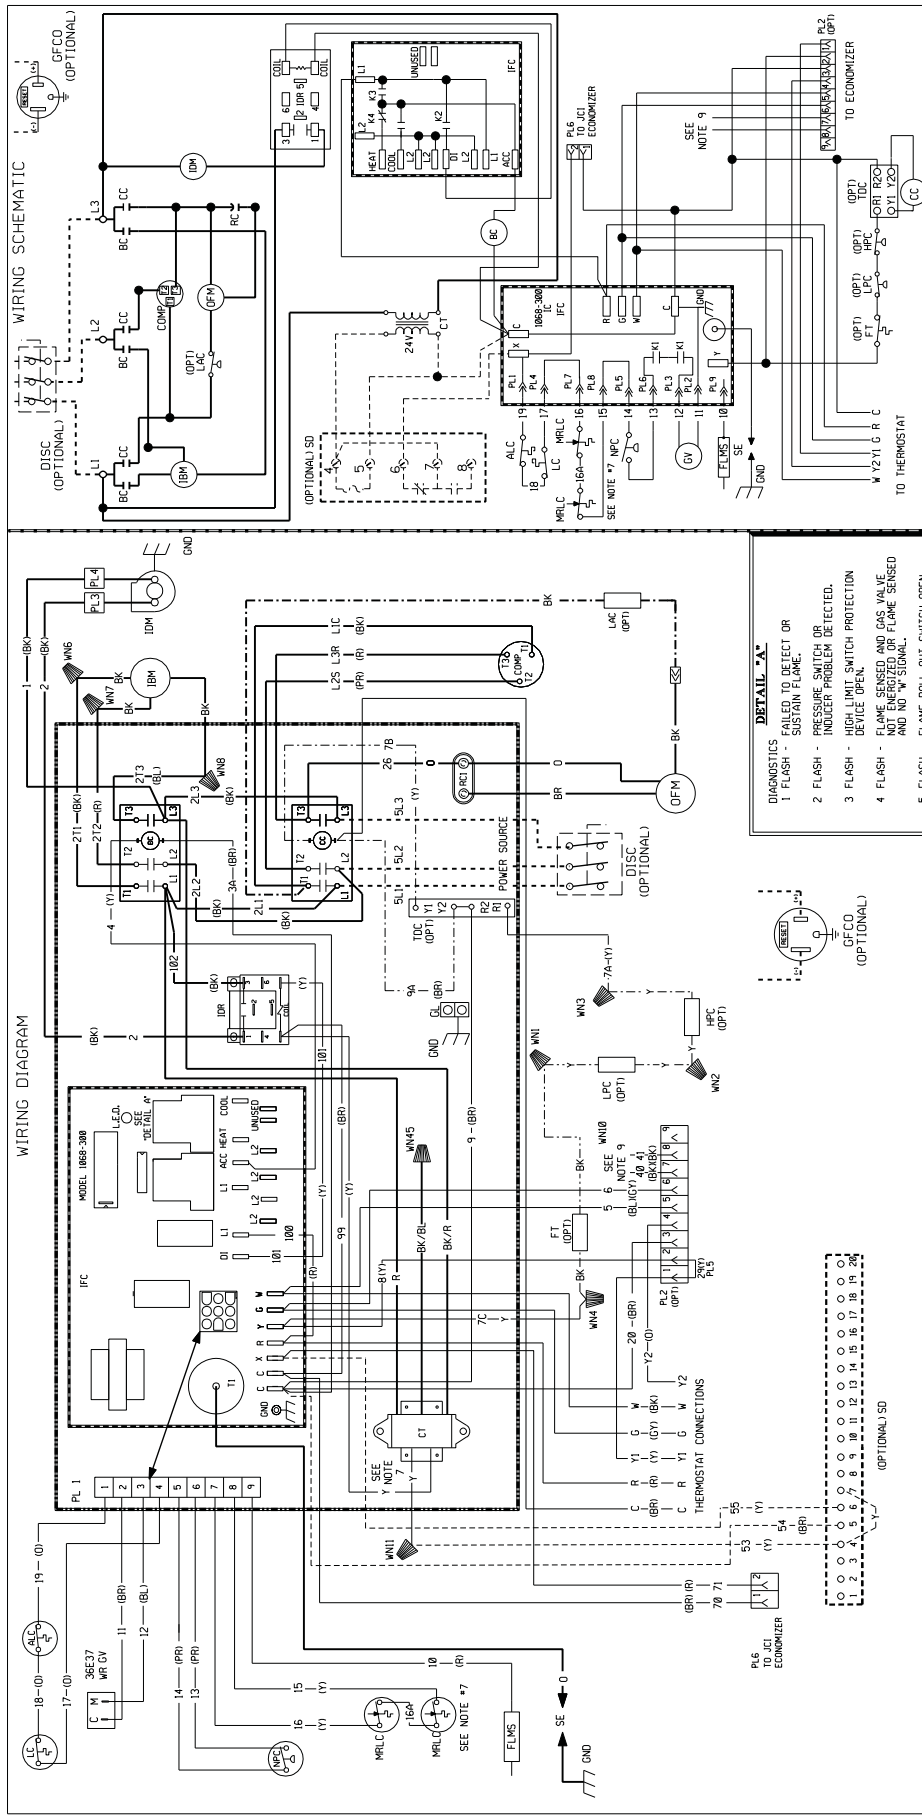

WIRE COLOR CODE

BK	BLACK
BR	BROWN
BL	BLUE
G	GREEN
GY	GRAY
O	ORANGE
PR	PURPLE
RED	RED
R	WHITE
W	WHITE
Y	YELLOW

ELECTRICAL WIRING DIAGRAM

460 3 PHASE, 60 HZ
BELT DRIVE

WIRING INFORMATION

LINE VOLTAGE
-FACTORY STANDARD
-FACTORY OPTION
-FIELD INSTALLED
-LOW VOLTAGE
-FACTORY STANDARD
-FACTORY OPTION
-FIELD INSTALLED
-REPLACEMENT WIRE
-MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C.MIN.)
-CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C., NATIONAL WIRING REGULATIONS, AND LOCAL CODES AS APPLICABLE.

NOTES:

- CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
- COMPRESSOR MOTOR THERMALLY PROTECTED. ALL 3 PHASE MODELS ARE PROTECTED UNDER PRIMARY SINGLE PHASE CONDITIONS.
- CONTRACTOR FACTORY WIRE. CONNECT FIELD WIRE TO FACTORY SUPPLIED CONTACTOR IN ELECTRICAL BOX.
- LOW VOLTAGE CIRCUIT IS N.E.C. CLASS 2 WITH A CLASS 2 TRANSFORMER, 24V, 50/60 HZ SUPPLIED.
- CONNECT FIELD WIRING IN GROUNDED RAIN TIGHT CONDUIT TO 60 HZ FUSED DISCONNECT.
- ONLY ONE MRLC IS NEEDED ON THE 060,000 INPUT UNIT.
- POWER TRANSFORMER PRIMARY LEADS: BLUE-COMMON; BK/RED-460V, 60 HZ.; 380V, 50 HZ.; RED-575V, 60 HZ.; 415V, 50 HZ..
- WIRES FROM PL2 (7 & 8) GO TO THE MIXED AIR SENSOR ON THE OPTIONAL ECONOMIZER.
- Y2 IS USED ONLY FOR THE OPTIONAL ECONOMIZER.

COMPONENT CODE


ALC	AUX. LIMIT CONTROL
BC	BLOWER CONTACTOR
CC	COMPRESSOR CONTACTOR
COMP	COMPRESSOR MOTOR
CLCS	CONTROL TRANSFORMER
CLSW	CONTROL SWITCH
FLMS	FLAME SENSOR
FT	FREEZE STAT.
GFCC	GROUND FAULT CONVENIENCE OUTLET
GL	GROUND LUG
GND	GROUND
GV	GAS VALVE
HFC	HIGH PRESSURE CONTROL
IBM	INDOOR BLOWER MOTOR DIRECT DRIVE
IDR	INDUCED DRAFT RELAY
IFC	INDUCED DRAFT RELAY
LAC	LOW AMBIENT COOLING CONTROL
LC	LIMIT CONTROL
LPC	LOW PRESSURE CONTROL
MRLC	MANUAL RESET LIMIT CONTROL
NPC	NEGATIVE PRESSURE CONTROL
PL	INDOOR FAN MOTOR
PLC	POWER TRANSFORMER
PT	POWER TRANSFORMER
RC	RUN CAPACITOR
SD	SMOKE DETECTOR
SE	SPARK ELECTRODE
TDC	TIME DELAY CONTROL
W	WIRE NUT
IDR	INDUCED DRAFT RELAY

REV	DATE	DWG. NO.
04	5-23-05	910-23596-24

DR. BY: MCB
APP. BY: DATE

APP. BY: DATE

APP. BY: DATE

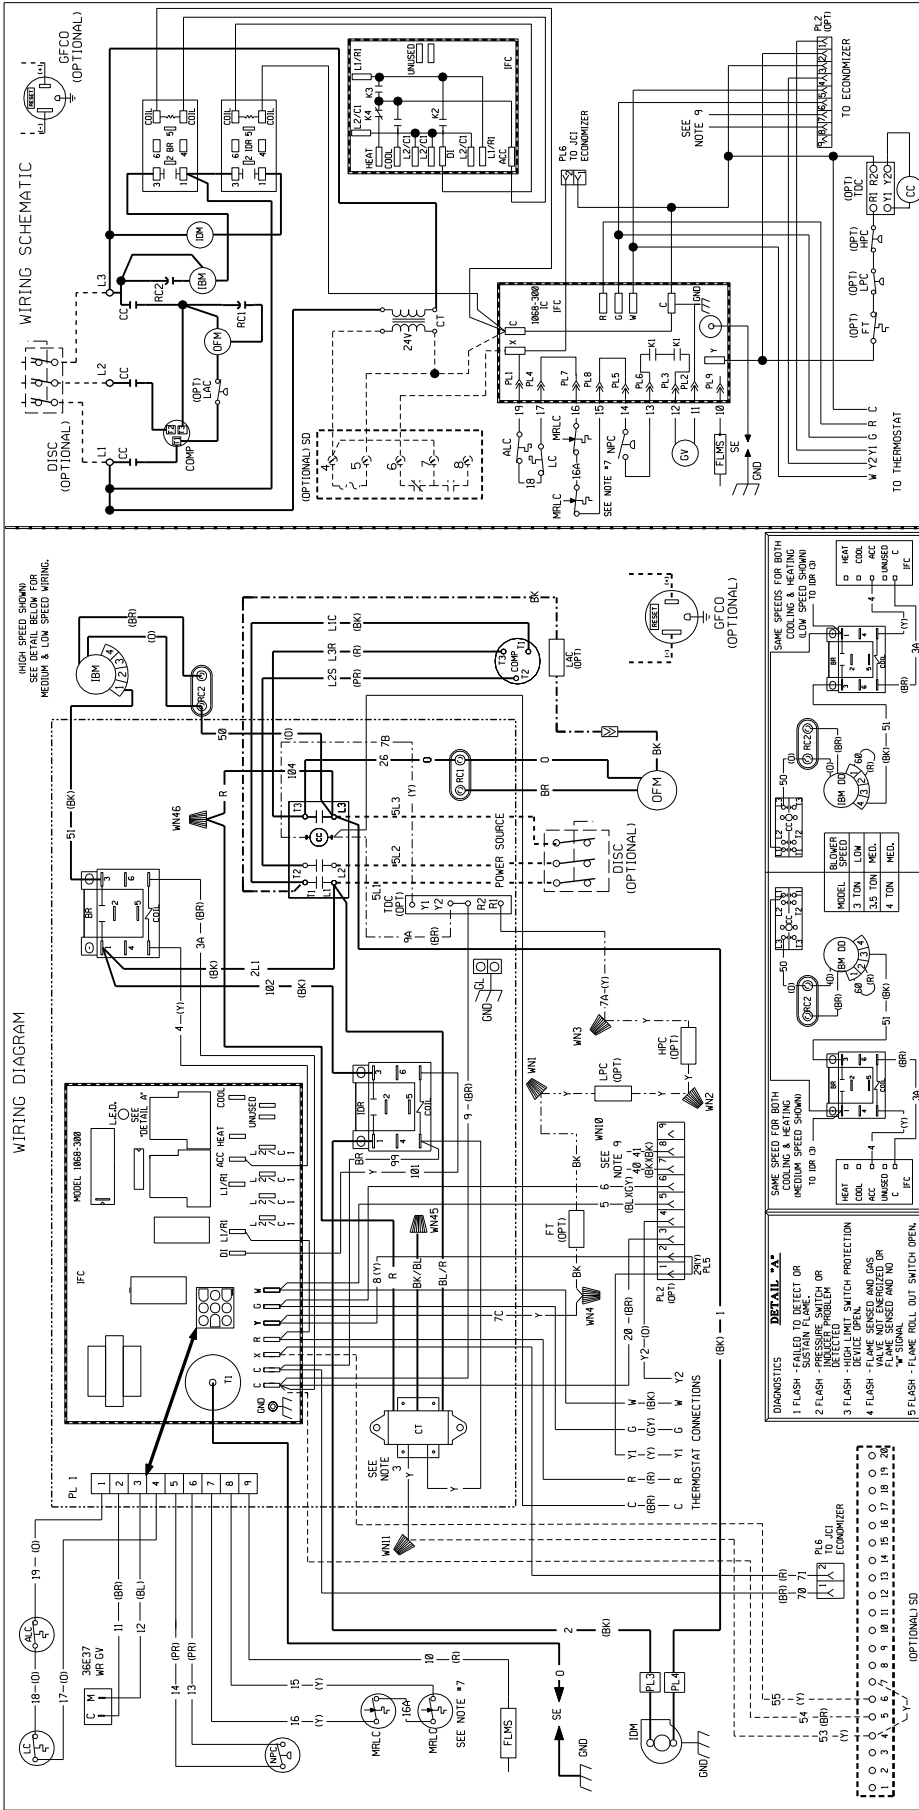

WIRE COLOR CODE

BK	BLACK
BR	BROWN
BL	BLUE
G	GREEN
GY	GRAY
OR	ORANGE
PR	PURPLE
R	RED
W	WHITE
Y	YELLOW

ELECTRICAL WIRING DIAGRAM
460, 3 PHASE, 60 HZ
DIRECT DRIVE
ROOFTOP

DR. BY	APP. BY	DATE	DWG. NO.	REV
MCB	MCB	5-23-05	90-23596-25	04

WIRING INFORMATION

LINE VOLTAGE
-FACTORY STANDARD
-FACTORY OPTION
-FIELD INSTALLED
LOW VOLTAGE
-FACTORY STANDARD
-FACTORY OPTION
-FIELD INSTALLED
REPLACE WIRE
-MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C.M.I.)
-CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C., NATIONAL WIRING REGULATIONS, AND LOCAL CODES AS APPLICABLE.


- NOTES:**
- CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
 - COMPRESSOR MOTOR THERMALLY PROTECTED. ALL 3 PHASE MODELS ARE PROTECTED UNDER PRIMARY SINGLE PHASE CONDITIONS.
 - POWER TRANSFORMER PRIMARY LEADS: BLUE-COMMON BK/RED-480V, 60 HZ / 380V, 50 HZ; RED-375V, 60 HZ / 415V, 50 HZ.
 - CONFIRM FACTORY WIRE CONNECTIONS TO FACTORY SUPPLIED CONTROL PANEL IN ELECTRICAL BOX.
 - LOW VOLTAGE SUPPLY (90V/208V) SUPPLIED.
 - CONNECT WIRING IN GROUNDED RAIN TIGHT CONDUIT TO 60 HZ WIRE FROM PL2 (7 & 8) TO THE MIXED AIR SENSOR ON THE OPTIONAL ECONOMIZER.
 - Y2 IS USED ONLY FOR THE OPTIONAL ECONOMIZER.

DIAGNOSTICS

- FLASH - FAILURE TO DETECT OR
- FLASH - PRESSURE SWITCH OR
- FLASH - HIGH LIMIT SWITCH PROTECTION DETECTED
- FLASH - FLAME SENSED AND GAS VALVE NOT ENERGIZED OR "X" SIGNAL
- FLASH - FLAME ROLL OUT SWITCH OPEN

COMPONENT CODE

ALC	AUX LIMIT CONTROL
BC	BLOWER CONTACTOR
CC	COMPRESSOR CONTACTOR
COMP	COMPRESSOR MOTOR
CT	CONTROL TRANSFORMER
DISC	DISCONNECT SWITCH
FLMS	FLAME SENSING
FT	FREEZE STAT
GFCO	GROUND FAULT CONVENIENCE OUTLET
GL	GROUND LUG
GND	GROUND
HPC	HIGH PRESSURE CONTROL
IBM	INDOOR BLOWER MOTOR
IDM	INDOOR DRAFT MOTOR
IDR	INDUCED DRAFT RELAY
IFC	INTERGRATED FURNACE CONTROL
LAC	LOW AMBIENT COOLING CONTROL
LPC	LIMIT CONTROL
MRLC	MANUAL RESET LIMIT CONTROL
NPC	NEGATIVE PRESSURE CONTROL
OFM	OUTDOOR FAN MOTOR
PL	PLUG
PT	PAIN CAPTOR
RC	RUN TRANSFORMER
SD	SHOCK DETECTOR
SE	SPARK ELECTRODE
TOC	TIME DELAY CONTROL
WN	WIRE NUT

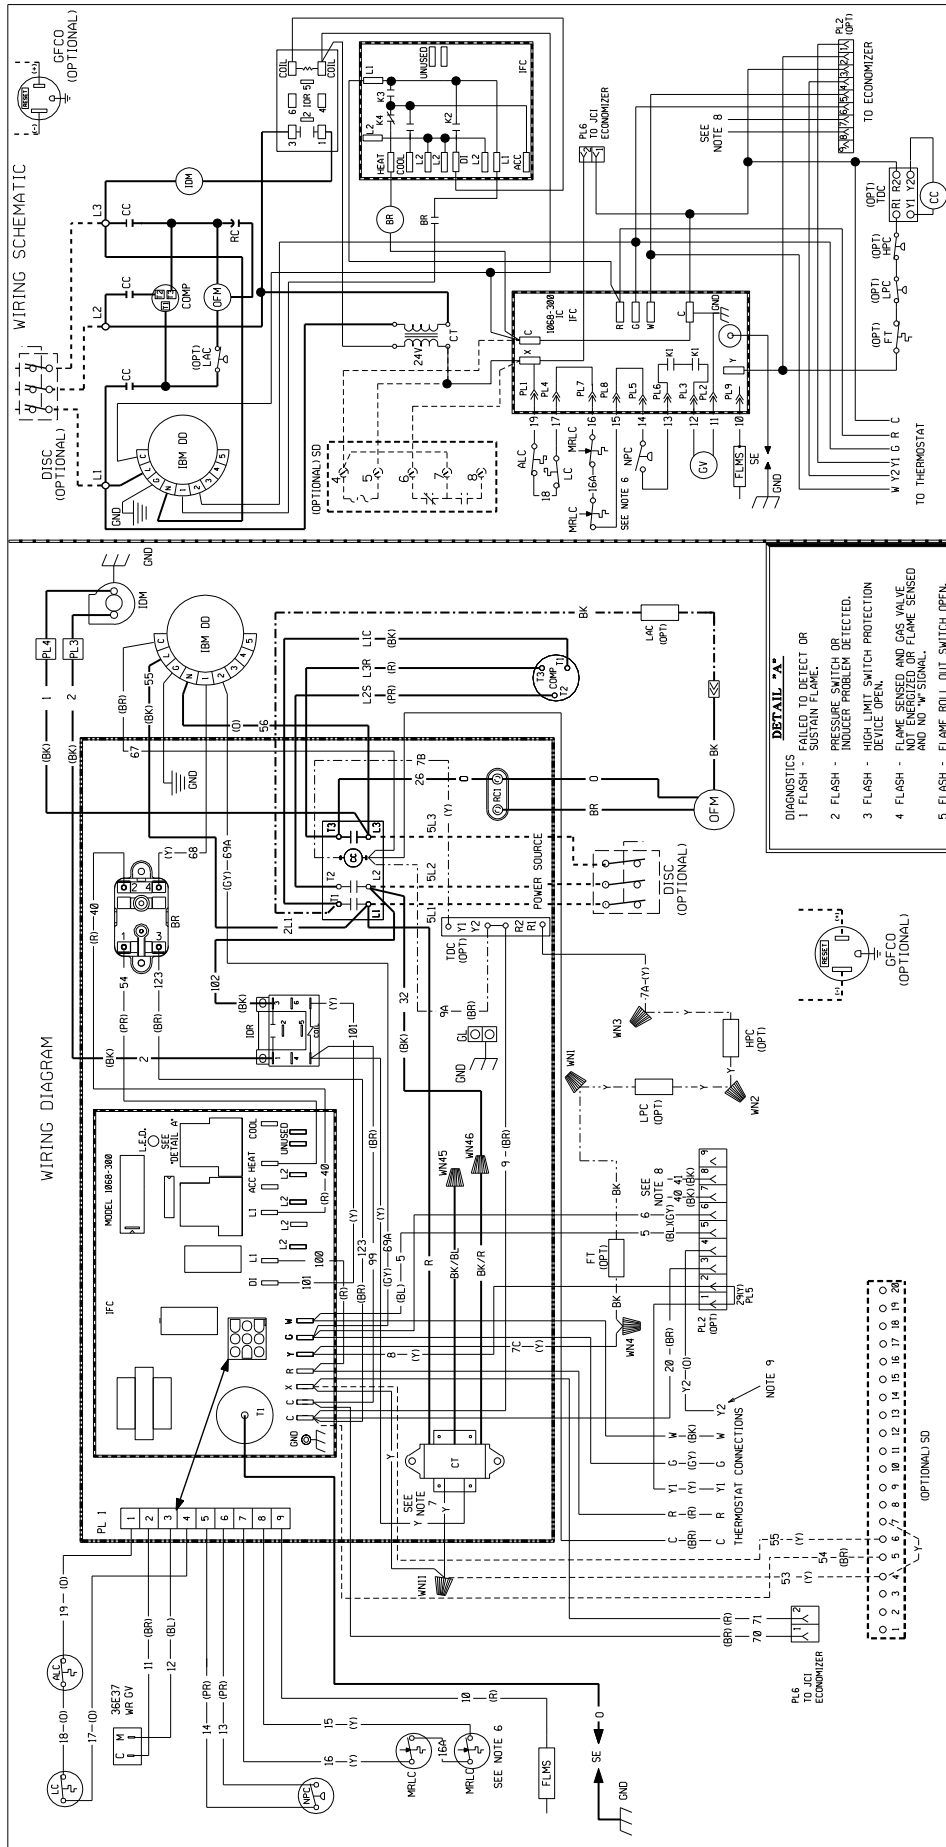

COMPONENT CODE		WIRE COLOR CODE	
ALC	AUX. LIMIT CONTROL	BK	BLACK
BC	BLOWER CONTACTOR	BR	BROWN
CC	COMPRESSOR CONTACTOR	BL	BLUE
COMP	COMPRESSOR	GR	GREEN
CT	CONTROL TRANSFORMER	GY	GRAY
DISC	DISCONNECT SWITCH	OR	ORANGE
FLMS	FLAME SENSOR	PR	PURPLE
FT	FREEZE STAT	RD	RED
GFCC	GROUND FAULT CONVENIENCE OUTLET	R	WHITE
GL	GROUND LUG	W	YELLOW
GRD	GROUND		
HPS	HIGH PRESSURE CONTROL		
IDR	INDUCED DRAFT MOTOR		
IBM	INDOOR BLOWER MOTOR		
IFC	INTERGRADED FURNACE CONTROL		
LAC	LOW AMBIENT COOLING CONTROL		

WIRING INFORMATION	
LINE VOLTAGE	-FACTORY STANDARD
	-FACTORY OPTION
	-FIELD INSTALLED
LOW VOLTAGE	-FACTORY STANDARD
	-FACTORY OPTION
	-FIELD INSTALLED
REPLACEMENT WIRE	-MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C.MIN.)
	-CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C., NATIONAL WIRING REGULATIONS, AND LOCAL CODES AS APPLICABLE.

NOTES:	
1.	CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
2.	COMPRESSOR MOTOR THERMALLY PROTECTED, ALL 3 PHASE MODELS ARE PROTECTED UNDER PRIMARY SINGLE PHASE CONDITIONS.
3.	CONTACTOR FACTORY WIRED, CONNECT FIELD WIRE TO FACTORY SUPPLIED CONTACTOR IN ELECTRICAL BOX.
4.	LOW VOLTAGE CIRCUIT IS N.E.C. CLASS 2 WITH A CLASS 2 TRANSFORMER 24V/50/60 HZ SUPPLIED.
5.	CONNECT FIELD WIRING IN GROUNDED RAIN TIGHT CONDUIT TO 60 HZ FUSED DISCONNECT.
6.	ONLY ONE WMLC IS NEEDED ON THE 80,000 INRUT UNIT.
7.	CONTROL TRANSFORMER PRIMARY LEADS BLUE-COMMON, BK/RED-460V, 50 HZ, 380V, 50 HZ, RED-575V, 50 HZ, 415V, 50 HZ.
8.	WIRES FROM PL 2 & 8 GO TO THE MIXED AIR SENSOR ON THE OPTIONAL ECONOMIZER.
9.	Y 2 IS USED ONLY FOR THE OPTIONAL ECONOMIZER.

ELECTRICAL WIRING DIAGRAM	
460V	X-DRIVE MOTOR
	DIRECT DRIVE BLOWER

DR. BY	APP. BY	DATE	DWG. NO.
MGR		4-11-10	90-23596-37

REV	DATE	DESCRIPTION
01	4-11-10	

BEFORE PURCHASING THIS APPLIANCE, READ IMPORTANT ENERGY COST AND EFFICIENCY INFORMATION AVAILABLE FROM YOUR RETAILER.

GENERAL TERMS OF LIMITED WARRANTY*

Rheem will furnish a replacement for any part of this product which fails in normal use and service within the applicable periods stated, in accordance with the terms of the limited warranty.

***For complete details of the Limited and Conditional Warranties, including applicable terms and conditions, contact your local contractor or the Manufacturer for a copy of the product warranty certificate.**

Compressor	
3-Phase, Commercial Applications	Five (5) Years
Parts	
3-Phase, Commercial Applications	One (1) Year
Factory Standard Heat Exchanger	
3-Phase, Commercial Applications	Ten (10) Years
Stainless Steel Heat Exchanger	
3-Phase, Commercial Applications	Twenty (20) Years



Air





The new degree of comfort.™

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Heating, Cooling & Water Heating • P.O. Box 17010
Fort Smith, Arkansas 72917 • www.rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario • L6Y 0P5



INTEGRATED AIR & WATER

PRINTED IN U.S.A 03/12 QG FORM NO. R11-852