

INSTALLATION INSTRUCTIONS


Package Air Conditioners Featuring

Industry Standard R-410A Refrigerant ~~R-410A~~

RLNL 13 SEER (3-5 TONS) SERIES

RLPL 14 SEER (3-5 TONS) SERIES

PRELIMINARY

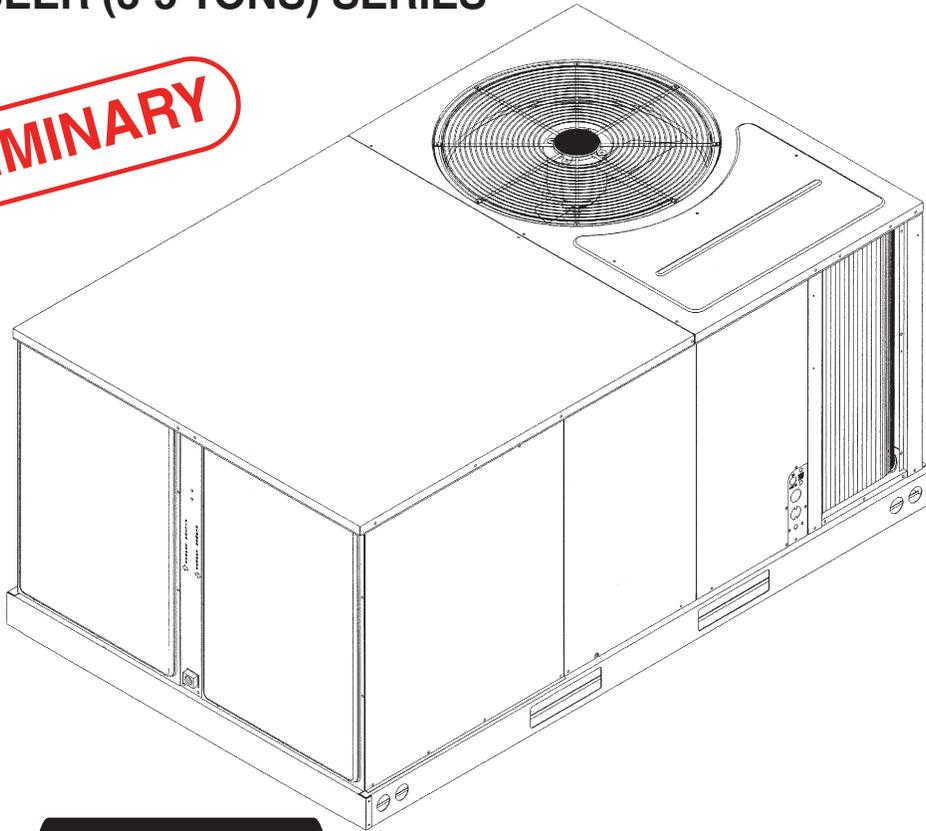

ENERGY STAR

(14 SEER ONLY)



RECOGNIZE THIS SYMBOL AS AN INDICATION OF IMPORTANT SAFETY INFORMATION!

WARNING

THESE INSTRUCTIONS ARE INTENDED AS AN AID TO QUALIFIED, LICENSED SERVICE PERSONNEL FOR PROPER INSTALLATION, ADJUSTMENT AND OPERATION OF THIS UNIT. READ THESE INSTRUCTIONS THOROUGHLY BEFORE ATTEMPTING INSTALLATION OR OPERATION. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN IMPROPER INSTALLATION, ADJUSTMENT, SERVICE OR MAINTENANCE POSSIBLY RESULTING IN FIRE, ELECTRICAL SHOCK, PROPERTY DAMAGE, PERSONAL INJURY OR DEATH.



ISO 9001:2008

Certificate Number: 30164

DO NOT DESTROY THIS MANUAL

PLEASE READ CAREFULLY AND KEEP IN A SAFE PLACE FOR FUTURE REFERENCE BY A SERVICEMAN

I. TABLE OF CONTENTS

I. Table of Contents	2
II. Introduction.....	3
III. Checking Product Received	3
IV. Specifications	3
V. Equipment Protection	4
VI. Installation	7
A. General	7
1. Pre-Installation Check Points	7
2. Location	7
B. Outside Slab Installation	7
C. Clearances.....	8
D. Rooftop Installation	8
VII. Ductwork	9
VIII. Filters.....	10
IX. Conversion Procedure.....	10
X. Condensate Drain	10
XI. Electrical Wiring	11
A. Power Wiring	11
B. Special Instructions for Power Wiring with Aluminum Conductors	11
C. Control Wiring	12
D. Internal Wiring.....	13
E. Grounding	13
F. Thermostat.....	13
XII. Indoor Air Flow Data.....	14
XIII. Crankcase Heat.....	14
XIV. Pre-Start Check.....	14
XV. Startup.....	14
XVI. Operation.....	15
XVII. Auxiliary Heat	15
XVIII. General Data.....	16-41
XIX. Miscellaneous.....	42
Electrical & Physical Data	42-47
Airflow Performance.....	48-53
Heater Kit Characteristics	54-67
Wiring Diagrams.....	68-73
Charge Charts.....	74-78
Troubleshooting.....	79



Recognize this symbol as an indication of Important Safety Information!



WARNING

PROPOSITION 65: THIS APPLIANCE CONTAINS FIBERGLASS INSULATION. RESPIRABLE PARTICLES OF FIBERGLASS ARE KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER..



WARNING

THE MANUFACTURER'S WARRANTY DOES NOT COVER ANY DAMAGE OR DEFECT TO THE AIR CONDITIONER CAUSED BY THE ATTACHMENT OR USE OF ANY COMPONENTS, ACCESSORIES OR DEVICES (OTHER THAN THOSE AUTHORIZED BY THE MANUFACTURER) INTO, ONTO OR IN CONJUNCTION WITH THE AIR CONDITIONER. YOU SHOULD BE AWARE THAT THE USE OF UNAUTHORIZED COMPONENTS, ACCESSORIES OR DEVICES MAY ADVERSELY AFFECT THE OPERATION OF THE AIR CONDITIONER AND MAY ALSO ENDANGER LIFE AND PROPERTY. THE MANUFACTURER DISCLAIMS ANY RESPONSIBILITY FOR SUCH LOSS OR INJURY RESULTING FROM THE USE OF SUCH UNAUTHORIZED COMPONENTS, ACCESSORIES OR DEVICES.

II. INTRODUCTION

This booklet contains the installation and operating instructions for your package air conditioner. There are a few precautions that should be taken to derive maximum satisfaction from it. Improper installation can result in unsatisfactory operation or dangerous conditions.

Read this booklet and any instructions packaged with separate equipment required to make up the system prior to installation. Give this booklet to the owner and explain its provisions. The owner should retain this booklet for future reference.

III. CHECKING PRODUCT RECEIVED

Upon receiving the unit, inspect it for any damage from shipment. Claims for damage, either shipping or concealed, should be filed immediately with the shipping company. Check the unit model number, electrical characteristics, and accessories to determine if they are correct.

IV. SPECIFICATIONS

A. GENERAL

The Packaged Air Conditioner is available without heat or with 6, 10, 12, 15, 20 or 24 kW electric heat. Cooling capacities of 3, 3½, 4 and 5 nominal tons of cooling are available. Units are convertible from end supply and return to bottom supply and return by relocation of supply and return air access panels. See cover installation detail.

The units are weatherized for mounting outside of the building.

The information on the rating plate is in compliance with the FTC and DOE rating for single phase units. The following information is for three phase units which **are not** covered under the DOE certification program.

1. The efficiency rating of this unit is a product thermal efficiency rating determined under continuous operating conditions independent of any installed system.

B. MAJOR COMPONENTS

The unit includes a hermetically-sealed refrigerating system (consisting of a compressor, condenser coil, evaporator coil with thermal expansion valve), a circulation air blower, a condenser fan, and all necessary internal electrical wiring. The cooling system of these units is factory-evacuated, charged and performance tested. Refrigerant amount and type are indicated on rating plate.

C. R-410A REFRIGERANT

All units are factory charged with R-410A refrigerant.

1. Specification of R-410A:

Application: **R-410A is not a drop-in replacement for R-22;** equipment designs must accommodate its higher pressures. It cannot be retrofitted into R-22 units.

Pressure: **The pressure of R-410A is approximately 60% (1.6 times) greater than R-22.** Recovery and recycle equipment, pumps, hoses and the like need to have design pressure ratings appropriate for R-410A. *Manifold sets need to range up to 800 psig high-side and 250 psig low-side with a 550 psig low-side retard. Hoses need to have a service pressure rating of 800 psig. Recovery cylinders need to have a 400 psig service pressure rating. DOT 4BA400 or DOT BW400.*

Combustibility: At pressures above 1 atmosphere, mixture of R-410A and air can become combustible. **R-410A and air should never be mixed in tanks or supply lines, or be allowed to accumulate in storage tanks. Leak checking should never be done with a mixture of R-410A and air.** Leak checking can be performed safely with nitrogen or a mixture of R-410A and nitrogen.

2. Quick Reference Guide For R-410A

- R-410A refrigerant operates at approximately 60% higher pressure (1.6 times) than R-22. Ensure that servicing equipment is designed to operate with R-410A.
- R-410A refrigerant cylinders are pink.
- R-410A, as with other HFC's is only compatible with POE oils.
- Vacuum pumps will not remove moisture from POE oil.

- R-410A systems are to be charged with liquid refrigerants. Prior to March 1999, R-410A refrigerant cylinders had a dip tube. These cylinders should be kept upright for equipment charging. Post March 1999 cylinders do not have a dip tube and should be inverted to ensure liquid charging of the equipment.
- Do not install a suction line filter drier in the liquid line.
- A liquid line filter drier is standard on every unit.
- Desiccant (drying agent) must be compatible for POE oils and R-410A.

3. Evaporator Coil / TXV

The thermostatic expansion valve is specifically designed to operate with R-410A. **DO NOT use an R-22 TXV. The existing evaporator must be replaced with the factory specified TXV evaporator specifically designed for R-410A.**

4. Tools Required For Installing & Servicing R-410A Models

Manifold Sets:

- Up to 800 PSIG High side
- Up to 250 PSIG Low Side
- 550 PSIG Low Side Retard

Manifold Hoses:

- Service Pressure Rating of 800 PSIG

Recovery Cylinders:

- 400 PSIG Pressure Rating
- Dept. of Transportation 4BA400 or BW400

⚠ CAUTION

R-410A systems operate at higher pressures than R-22 systems. Do not use R-22 service equipment or components on R-410A equipment.

V. EQUIPMENT PROTECTION FROM THE ENVIRONMENT

The metal parts of this unit may be subject to rust or deterioration in adverse environmental conditions. This oxidation could shorten the equipment's useful life. Salt spray, fog or mist in seacoast areas, sulphur or chlorine from lawn watering systems, and various chemical contaminants from industries such as paper mills and petroleum refineries are especially corrosive.

If the unit is to be installed in an area where contaminants are likely to be a problem, special attention should be given to the equipment location and exposure.

1. Avoid having lawn sprinkler heads spray direction on the unit cabinet.
2. In coastal areas, locate the unit on the side of the building away from the waterfront.
3. Shielding provided by a fence or shrubs may give some protection.

Regular maintenance will reduce the buildup of contaminants and help to protect the unit's finish.

⚠ WARNING


DISCONNECT ALL POWER TO THE UNIT BEFORE STARTING MAINTENANCE. FAILURE TO DO SO CAN RESULT IN SEVERE ELECTRICAL SHOCK OR DEATH.

1. Frequent washing of the cabinet, fan blade and coil with fresh water will remove most of the salt or other contaminants that build up on the unit.
2. Regular cleaning and waxing of the cabinet with a good automobile polish will provide some protection.
3. A good liquid cleaner may be used several times a year to remove matter that will not wash off with water.

Several different types of protective coatings are offered in some areas. These coatings may provide some benefit, but the effectiveness of such coating materials cannot be verified by the equipment manufacturer.


The best protection is frequent cleaning, maintenance and minimal exposure to contaminants.

FIGURE 1
UNIT DIMENSIONS

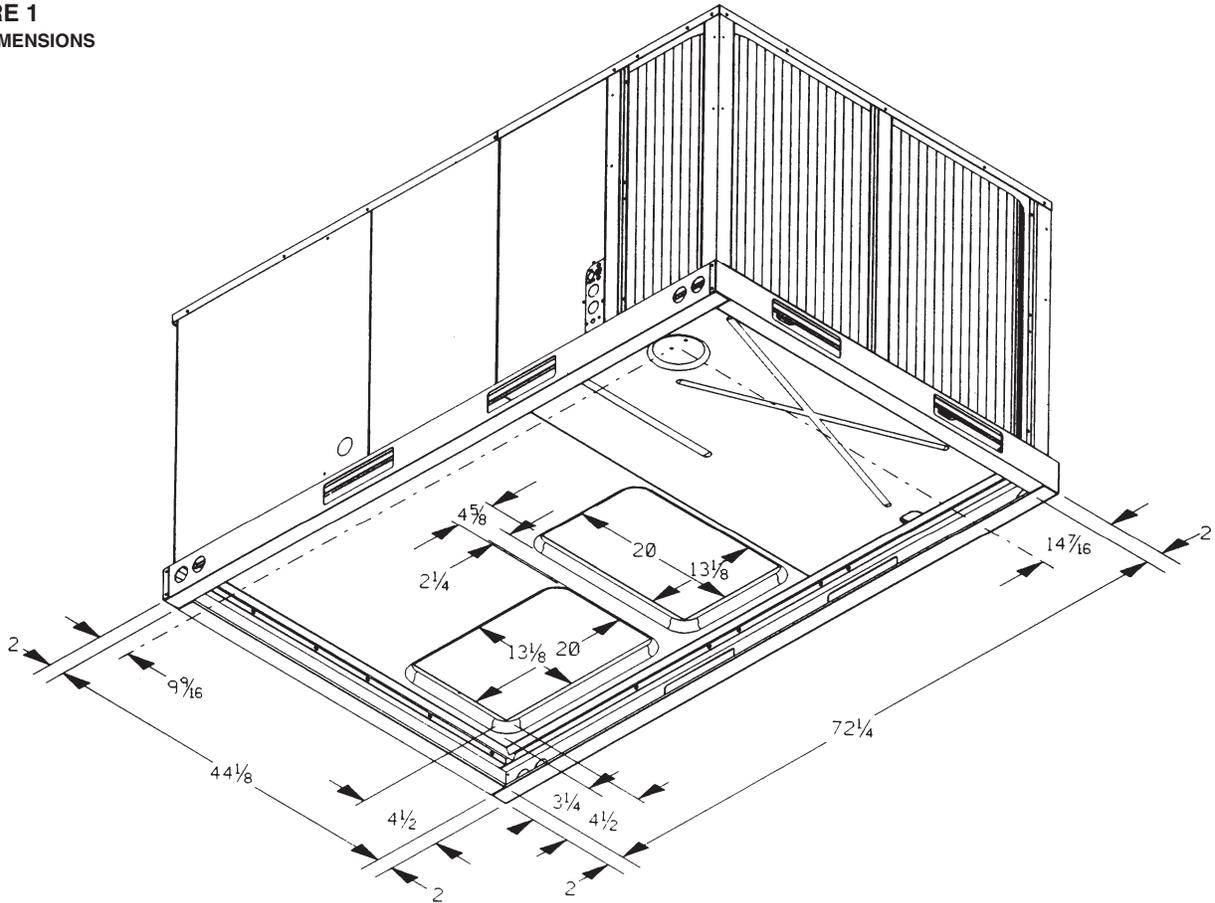


ILL 1316

FIGURE 2
UNIT DIMENSIONS

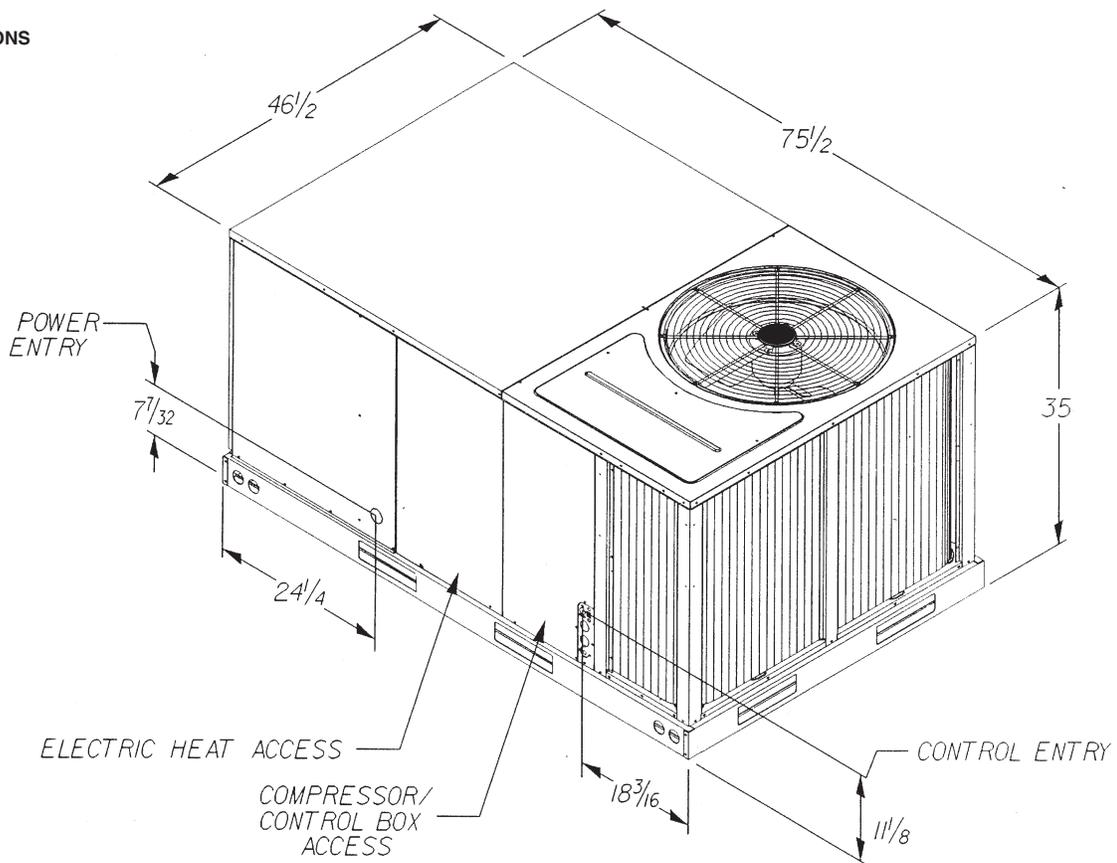


ILL1305

FIGURE 3
UNIT DIMENSIONS

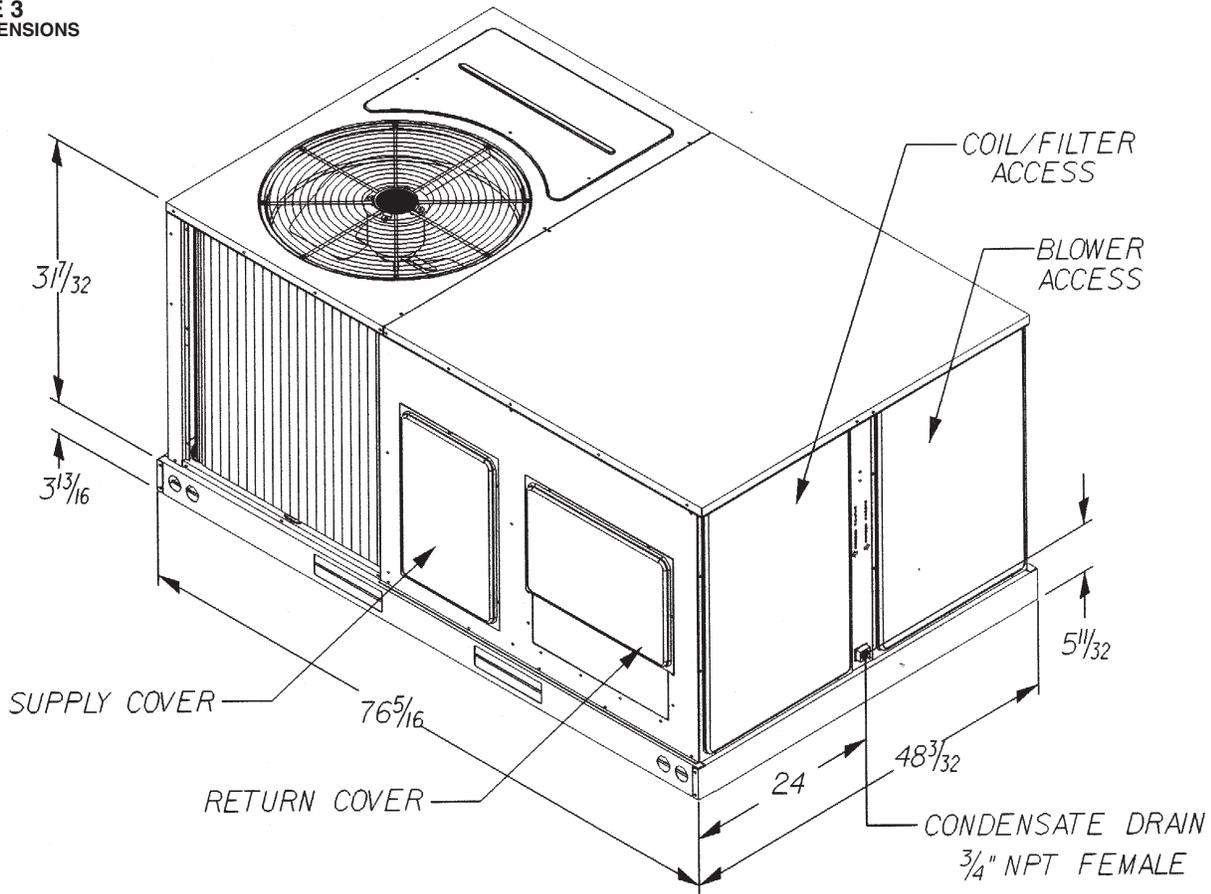

ILL 1304

FIGURE 4
UNIT DIMENSIONS

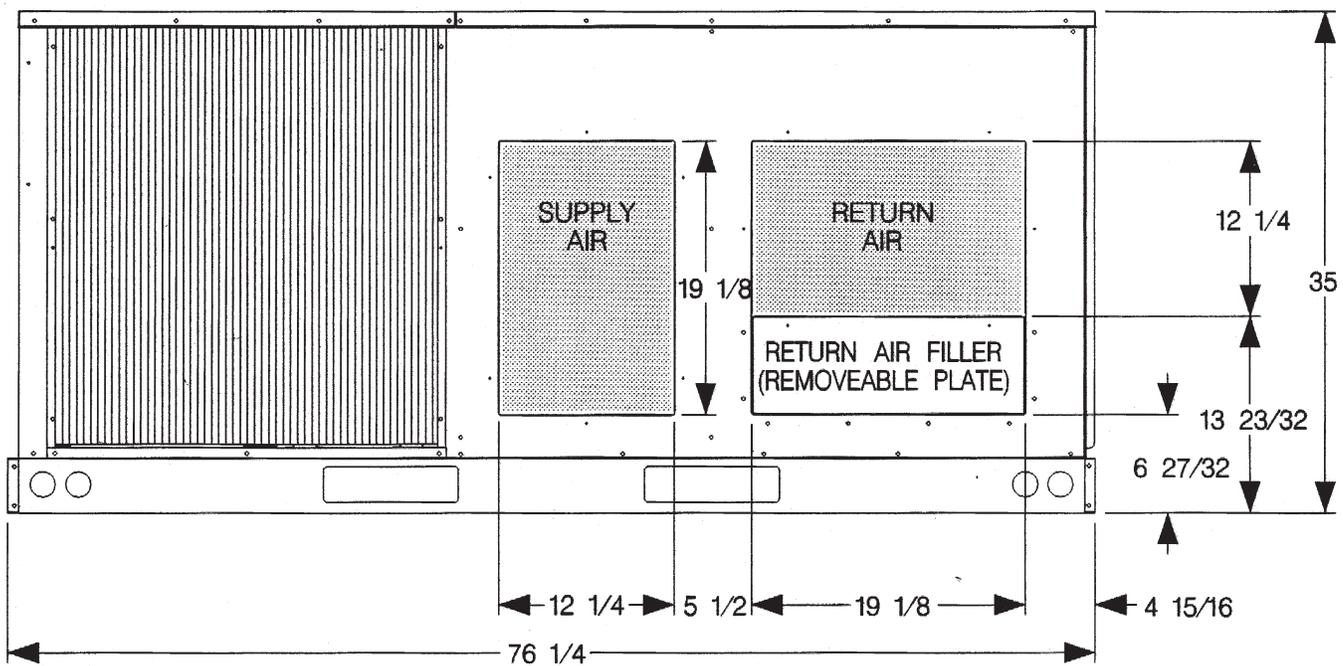

ILL 1288

FIGURE 5
PACKAGE AIR CONDITIONER – OUTSIDE SLAB INSTALLATION,
BASEMENT OR CRAWL SPACE DISTRIBUTION SYSTEM


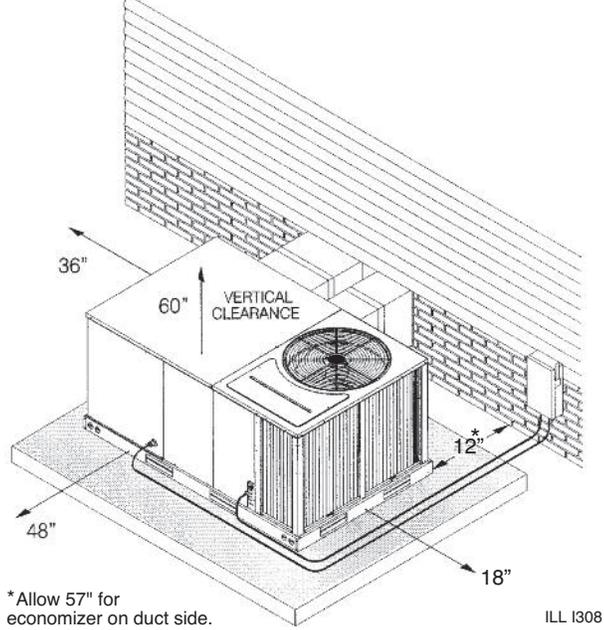


FIGURE 6
PACKAGE AIR CONDITIONER – OUTSIDE SLAB INSTALLATION, CLOSET
DISTRIBUTION SYSTEM. SLAB FLOOR CONSTRUCTION

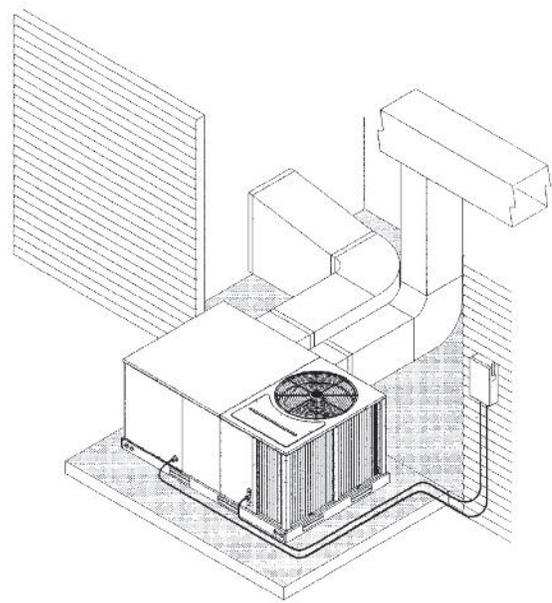

VI. INSTALLATION

A. GENERAL

1. PRE-INSTALLATION CHECK-POINTS

Before attempting any installation, the following points should be carefully considered:

- a. Structural strength of supporting members.
(rooftop installation)
- b. Clearances and provision for servicing.
- c. Power supply and wiring.
- d. Air duct connections.
- e. Drain facilities and connections.
- f. Location for minimum noise.

2. LOCATION


These units are designed for outdoor installations. They can be mounted on a slab or rooftop. They are not to be installed within any part of a structure such as an attic, crawl space, closet, or any other place where condenser air flow is restricted or other than outdoor ambient conditions prevail. Since the application of the units is of the outdoor type, it is important to consult your local code authorities at the time the first installation is made.

B. OUTSIDE SLAB INSTALLATION

(Typical outdoor slab installations are shown in Figures 5 and 6.)

1. Select a location where external water drainage cannot collect around the unit.
2. Provide a level concrete slab extending 3" beyond all four sides of the unit. The slab should be sufficient above grade to prevent ground water from entering the unit. **IMPORTANT:** To prevent transmission of noise or vibration, slab should not be connected to building structure.
3. The location of the unit should be such as to provide proper access for inspection and servicing.
4. Locate unit where operating sounds will not disturb owner or neighbors.
5. Locate unit so roof runoff water does not pour directly on the unit. Provide gutter or other shielding at roof level. Do not locate unit in an area where excessive snow drifting may occur or accumulate.
6. Remove compressor shipping supports (if so equipped) after installation.

FIGURE 7
PACKAGE AIR CONDITIONER – RIGGING FOR LIFTING

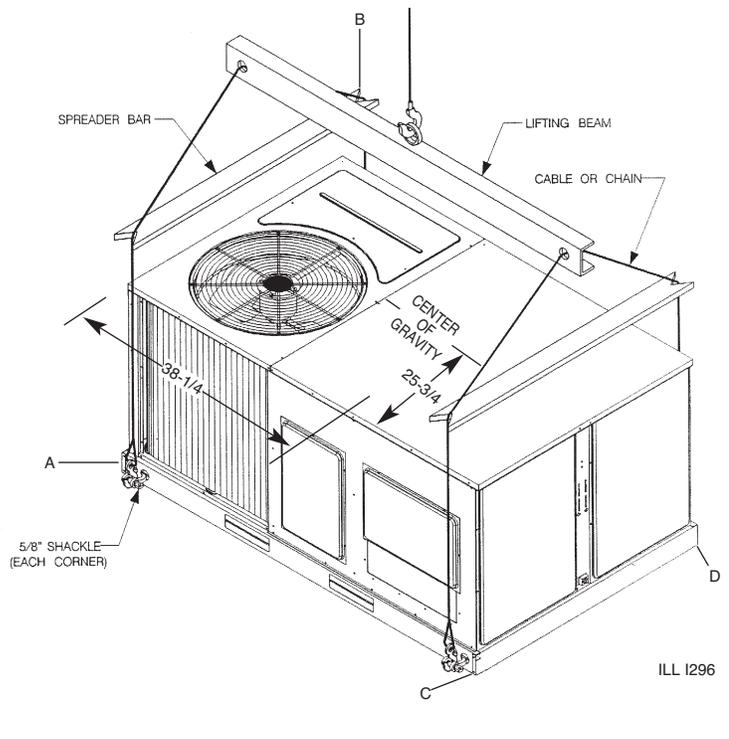

CORNER WEIGHTS BY PERCENTAGE			
A	B	C	D
23%	27%	23%	27%

C. CLEARANCES

The following minimum clearances must be observed for proper unit performance and serviceability.


1. Provide 48" minimum clearance at the front of the unit. Provide 36" minimum clearance at the left and right side of the unit for service access.
2. Provide 60" minimum clearance between top of unit and maximum 3 foot overhang.
3. Unit is design certified for application on combustible flooring with 0" minimum clearance.
4. See Figure 5 for illustration of minimum installation-service clearances.

D. ROOFTOP INSTALLATION

1. Before locating the unit on the roof, make sure that the strength of the roof and beams is adequate at that point to support the weight involved. (See specification sheet for weight of unit.) This is very important and user's responsibility.
2. For rigging and roofcurb details, see Figures 7 and 8. Use field-furnished spreaders.
3. For roofcurb assembly, see Roofcurb Installation Instructions.
4. If the roofcurb is not used, provisions for disposing of condensate water runoff must be provided.
5. The unit should be placed on a solid and level roofcurb or platform of adequate strength. See Figure 9.
6. The location of the unit on the roof should be such as to provide proper access for inspection and servicing.
7. Remove compressor shipping supports (if so equipped) after installation.

IMPORTANT: *If unit will not be put into service immediately, cover supply and return openings to prevent excessive condensation.*

FIGURE 8
PACKAGE AIR CONDITIONER – ROOFCURB INSTALLATION

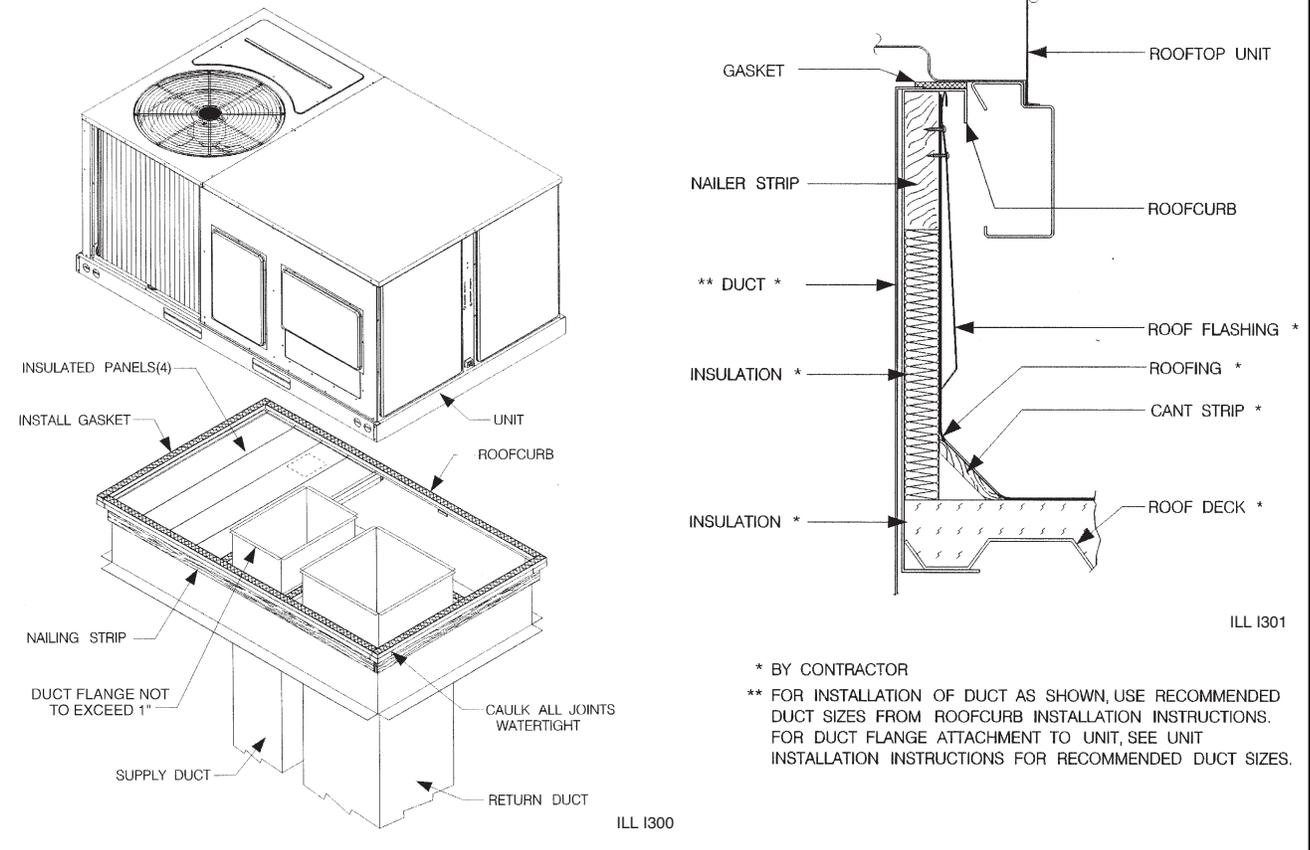

⚠ WARNING

DO NOT, UNDER ANY CIRCUMSTANCES, CONNECT RETURN DUCTWORK TO ANY OTHER HEAT PRODUCING DEVICE SUCH AS A FIREPLACE INSERT, STOVE, ETC. UNAUTHORIZED USE OF SUCH DEVICES MAY RESULT IN FIRE, CARBON MONOXIDE POISONING, EXPLOSION, PROPERTY DAMAGE, SEVERE PERSONAL INJURY OR DEATH.

VII. DUCTWORK

Ductwork should be fabricated by the installing contractor in accordance with local codes and NFPA90A. Industry manuals may be used as a guide when sizing and designing the duct system - contact Air Conditioning Contractors of America, 2800 Shirlington Road, Suite 300, Arlington, VA 22206, <http://www.acca.org>.

The unit should be placed as close to the space to be air conditioned as possible allowing clearance dimensions as indicated. Ducts should be run as directly as possible to supply and return outlets. Use of non-flammable waterproof flexible connectors on both supply and return connections at the unit to reduce noise transmission is recommended.

It is preferable to install the unit on the roof of the structure if the registers or diffusers are located on the wall or in the ceiling. A slab installation could be considered when the registers are low on a wall or in the floor.

On ductwork exposed to outside air conditions of temperature and humidity, use a minimum of 2" of insulation and a vapor barrier. Distribution system in attic, furred space or crawl space should be insulated with at least 2" of insulation with vapor barrier. One-half to 1" thickness of insulation is usually sufficient for ductwork inside the air conditioned space.

Balancing dampers should be provided for each branch duct in the supply system. Ductwork should be properly supported from the structure.

When installing ductwork, consider the following items:

1. Noncombustible flexible connectors should be used between ductwork and unit to reduce noise and vibration transmission into the ductwork.
2. When auxiliary heaters are installed, use noncombustible flexible connectors and clearance to combustible material of 0" for the first 3 feet of discharge duct. Clearance to unit top and side is 0".

FIGURE 9
PACKAGE AIR CONDITIONER – FLAT ROOFTOP INSTALLATION, ATTIC OR DROP CEILING DISTRIBUTION SYSTEM. MOUNTED ON ROOFCURB. CURB MUST BE LEVEL


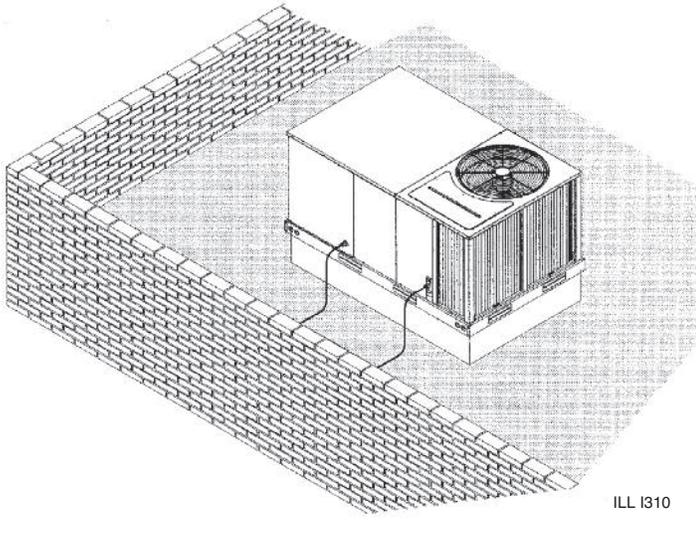


FIGURE 10
COVER GASKET DETAIL

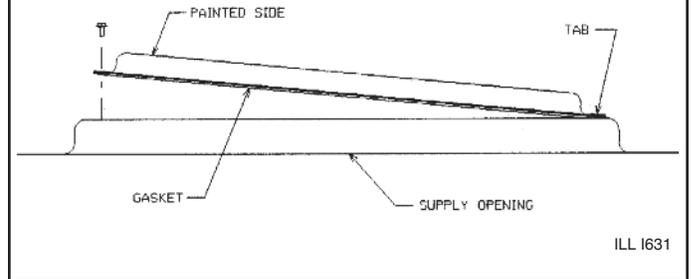

VIII. FILTERS

This unit is provided with 2 - 25" x 16" x 1" disposable filters. When replacing filters, ensure they are inserted fully to the back to prevent bypass.

IX. CONVERSION PROCEDURE


DOWNFLOW TO HORIZONTAL

1. Remove the screws and covers from the outside of the supply and return sections.
2. Install the covers in the bottom supply and return openings with the painted side up. See Figure 10. Use the existing gasket to seal the covers.
3. Secure the supply cover to the base of the unit with 1 screw, engaging prepunched tab in unit base.
4. Secure the return cover to the base of the unit with screws, engaging prepunched holes in the unit base.

X. CONDENSATE DRAIN

The condensate drain connection of the evaporator is 3/4" nominal female pipe thread. **IMPORTANT:** Install a condensate trap to ensure proper condensate drainage. See Figure 11.

FIGURE 11
CONDENSATE DRAIN

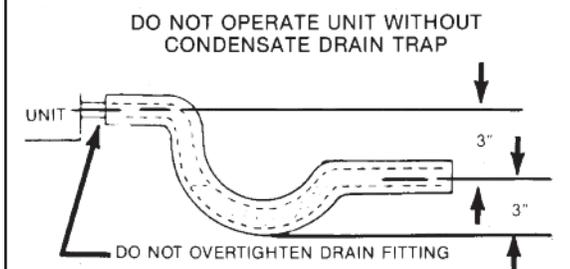

XI. ELECTRICAL WIRING

Field wiring must comply with the National Electrical Code* and local ordinances that may apply.

*C.E.C. in Canada

A. POWER WIRING

1. It is important that proper electrical power is available at the unit. Voltage should not vary more than 10% from that stamped on the unit rating plate. On three phase units, phases must be balanced within 3%.
2. Install a branch circuit disconnect within sight of the unit and of adequate size to handle the starting current. A bracket is shipped with the unit for mounting the disconnect. Reference Figure 12 for proper location.
3. For branch circuit wiring (main power supply to unit disconnect), the minimum wire size can be determined from Table A using the circuit ampacity found on the unit nameplate.

TABLE A COPPER WIRE SIZE — AWG (1% VOLTAGE DROP)

	300	4	3	2	2	1	1/0	1/0	2/0	2/0	3/0	3/0	3/0	4/0	4/0	4/0	4/0	250	250	250	250	300	300	300	300	350	350	350	350	
Supply	250	4	4	3	3	2	1	1	1/0	1/0	2/0	2/0	2/0	3/0	3/0	3/0	4/0	4/0	4/0	4/0	4/0	250	250	250	250	250	350	350	350	350
Wire	200	6	4	4	4	3	2	2	1	1	1/0	1/0	1/0	2/0	2/0	2/0	3/0	3/0	3/0	3/0	4/0	4/0	4/0	4/0	4/0	300	300	300	300	
Length	150	8	6	6	4	4	4	3	3	2	2	1	1	1/0	1/0	1/0	1/0	2/0	2/0	2/0	2/0	2/0	3/0	3/0	3/0	4/0	4/0	4/0	4/0	
Feet	100	10	8	8	6	6	6	4	4	3	3	2	2	2	1	1	1	1	1	1	1/0	1/0	1/0	1/0	1/0	1/0	2/0	2/0	2/0	
	50	14	12	10	10	8	8	6	6	6	4	4	4	3	3	3	2	2	2	2	2	1	1	1	1	1/0	1/0	1/0	2/0	
		15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115	120	125	130	135	140	145	150	155

NOTE: 1. Wire size based on 60°C type copper conductors below 100 ampacity. 2. Wire size based on 75°C type copper conductors for 100 ampacity and above.

4. This unit incorporates single point electrical connection for unit and electric heat accessory.
5. Power wiring must be run in grounded rain-tight conduit. Connect the power field wiring as follows:
 - a. NO ELECTRIC HEAT - Connect the field wires directly to the contactor pigtail in the electric heat access area. Connect ground wire to ground lug.
 - b. WITH ELECTRIC HEAT - Connect the field wires to the terminal block on the electric heater kit in the electric heat access area. Connect the ground wire to the ground lug on the heater kit.

NOTE: For field installation of a heater kit, follow the instructions provided with the heater kit.

6. The pigtail wires in the electric heat access area are factory wired to the contactor in the control box.
7. DO NOT connect aluminum field wires to electric heat kit power input terminals.


B. SPECIAL INSTRUCTIONS FOR POWER WIRING WITH ALUMINUM CONDUCTORS

1. Select the equivalent aluminum wire size from the tabulation below:

TABLE B. WIRE SIZES			
AWG Copper Wire Size	AWG Aluminum Wire Size	Connector Type and Size (or equivalent)	
#12	#10	T&B Wire Nut	PT2
#10	#8	T&B Wire Nut	PT3
#8	#6	IlSCO Split Bolt	AK-6
#6	#4	IlSCO Split Bolt	AK-4
#4	#2	IlSCO Split Bolt	AK-2
#3	#1	IlSCO Split Bolt	AK-1/0
#2	#0	IlSCO Split Bolt	AK-1/0
#1	#00	IlSCO Split Bolt	AK-2/0
#0	#000	IlSCO Split Bolt	AK-4/0

2. Attach a length (6" or more) of recommended size copper wire to the unit terminals L1 and L3 for single phase, L1, L2, L3 for three phase.

FIGURE 12
RECOMMENDED LOCATION OF BRANCH CIRCUIT DISCONNECT

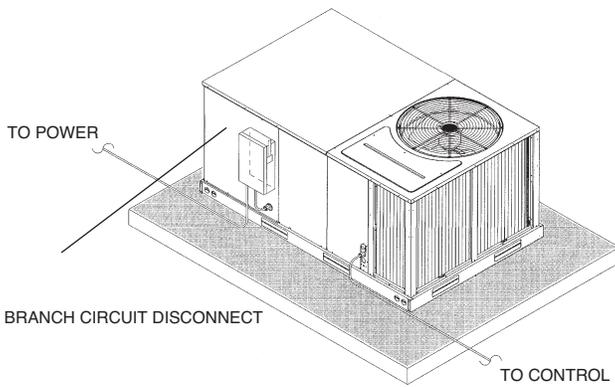


3. Splice copper wire pigtails to aluminum wire with U.L. recognized connectors for copper-aluminum splices. Follow these instructions very carefully to make a positive and lasting connection;
 - a. Strip insulation from aluminum conductor.
 - b. Coat the stripped end of the aluminum wire with the recommended inhibitor and wire brush aluminum surface through inhibitor. Inhibitors: Brundy, Pentex "A"; Alcoa, No. 2EJC; T&B KPOR Shield.
 - c. Clean and recoat aluminum conductor with inhibitor.
 - d. Make the splice using the above listed wire nuts or split bolt connectors.
 - e. Coat the entire connection with inhibitor and wrap with electrical insulating tape.

WARRANTY MAY NOT APPLY IF CONNECTIONS ARE NOT MADE PER INSTRUCTIONS

C. CONTROL WIRING (Class II)

1. Low voltage wiring should not be run in conduit with power wiring.
2. Control wiring is routed through the 7/8" hole adjacent to the compressor access panel. See Figure 2. Use a minimum #18 AWG thermostat wire. For wire lengths exceeding 50', use #16 AWG thermostat wire. The low voltage wires are connected to the unit pigtails which are supplied with the unit in the low voltage connection box located below the unit control box.


FIGURE 13
HEATER KIT INSTALLATION

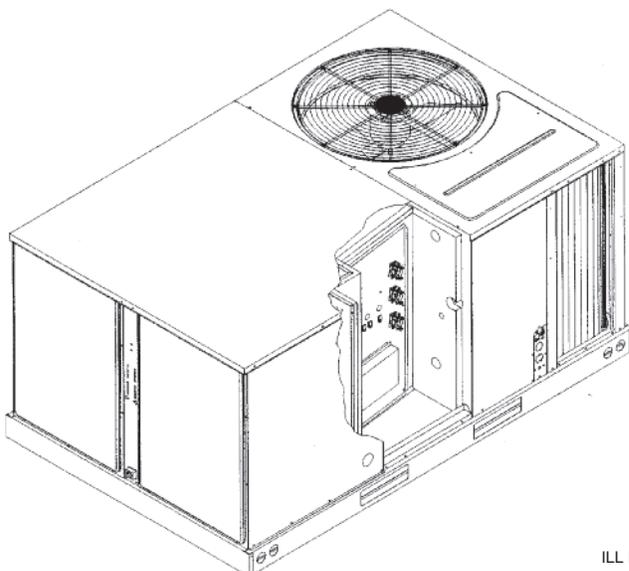

ILL I312

FIGURE 14
LOW VOLTAGE CONNECTIONS DIAGRAMS

STANDARD CONTROL WIRING

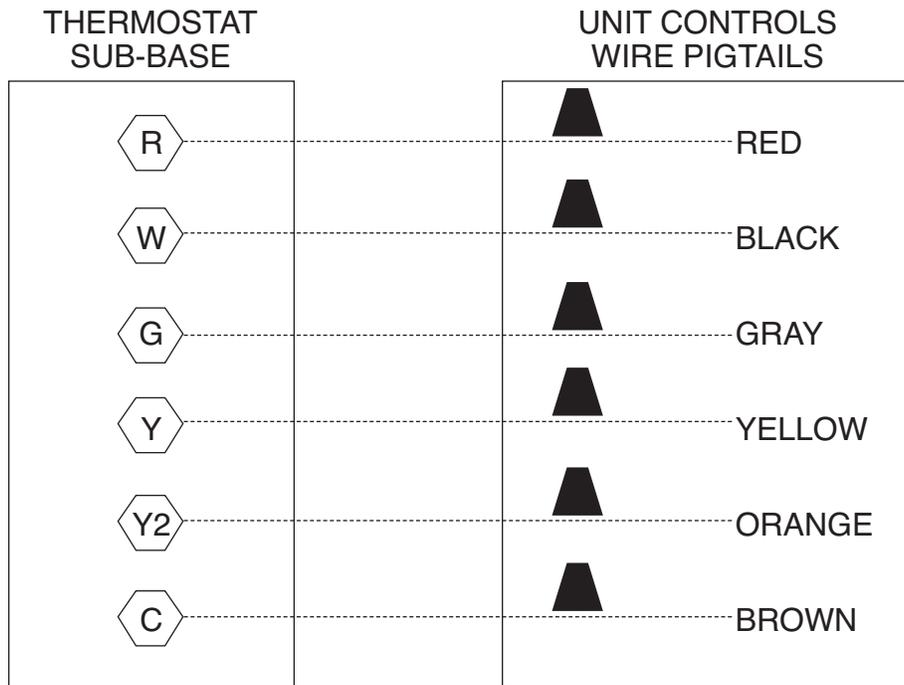

NOTE: Y2 IS ONLY USED WITH OPTIONAL ECONOMIZER.

3. Figure 14 shows representative low voltage connection diagrams. Read your thermostat installation instructions for any special requirements for your specific thermostat.

NOTE — Units installed in Canada require that an outdoor thermostat (30,000 min. cycles of endurance) be installed and be wired with C.E.C. Class I wiring.

D. INTERNAL WIRING

IMPORTANT: Some single phase models are equipped with a single pole contactor. Caution must be exercised when servicing as only one leg of the power supply is broken with the contactor.

Some models are equipped with electronically commutated blower motors which are constantly energized unless the main unit disconnect is in the off position.

1. A diagram of the internal wiring of this unit is located on the inside of the compressor access panel. If any of the original wire as supplied with the appliance must be replaced, the wire gauge and insulation must be the same as original wiring.

E. GROUNDING

WARNING

THE UNIT MUST BE PERMANENTLY GROUNDED. A GROUNDING LUG IS PROVIDED IN THE ELECTRIC HEAT KIT ACCESS AREA FOR A GROUND WIRE. FAILURE TO GROUND THIS UNIT CAN RESULT IN FIRE OR ELECTRICAL SHOCK CAUSING PROPERTY DAMAGE, SEVERE PERSONAL INJURY OR DEATH.

F. THERMOSTAT

The thermostat should be mounted on an inside wall about five feet above the floor in a location where it will not be affected by unconditioned air, sun, or drafts from open doors or other sources. READ installation instructions in thermostat package CAREFULLY because each has some different wiring requirements.

XII. INDOOR AIR FLOW DATA

Direct-drive blower models are shipped factory wired for the proper speed at a typical external static. See Blower Performance Data. Belt-drive blower models have motor sheaves set for proper CFM at a typical external static.

XIII. CRANKCASE HEAT (OPTIONAL)

Crankcase heat is not required on scroll type compressors, but may be necessary for difficult starting situations.

XIV. PRE-START CHECK

1. Is unit properly located and slightly slanted toward indoor condensate drain?
 2. Is ductwork insulated, weatherproofed, with proper spacing to combustible materials?
 3. Is air free to travel to and from outdoor coil? (See Figure 5.)
 4. Is the wiring correct, tight, and according to unit wiring diagram?
 5. Is unit grounded?
 6. Are field supplied air filters in place and clean?
 7. Do the outdoor fan and indoor blower turn freely without rubbing, and are they tight on the motor shafts?
 8. Are the compressor shipping supports removed (if so equipped)?
-

XV. STARTUP

1. Turn thermostat to "OFF," turn "on" power supply at disconnect switch.
2. Turn temperature setting as high as it will go.
3. Turn fan switch to "ON."
4. Indoor blower should run. Be sure it is running in the right direction.
5. Turn fan switch to "AUTO." Turn system switch to "COOL" and turn temperature setting below room temperature. Unit should run in cooling mode.
6. Is outdoor fan operating correctly in the right direction?
7. Is compressor running correctly.
8. Check the refrigerant charge using the instructions located on compressor access panel. Replace service port caps. Service port cores are for system access only and will leak if not tightly capped.
9. Turn thermostat system switch to proper mode "HEAT" or "COOL" and set thermostat to proper temperature setting. Record the following after the unit has run some time.
 - A. Operating Mode _____
 - B. Discharge Pressure (High)_PSIG _____
 - C. Vapor Pressure at Compressor (Low) _____PSIG
 - D. VaporLine Temperature at Compressor _____°F.
 - E. Indoor Dry Bulb _____°F.
 - F. Indoor Wet Bulb _____°F.
 - G. Outdoor Dry Bulb _____°F.
 - H. Outdoor Wet Bulb _____°F.
 - I. Voltage at Contactor _____Volts
 - J. Current at Contactor _____Amps
 - K. Model Number _____
 - L. Serial Number _____
 - M. Location _____
 - N. Owner _____
 - O. Date _____
10. Adjust discharge air grilles and balance system.
11. Check ducts for condensation and air leaks.
12. Check unit for tubing and sheet metal rattles.
13. Instruct the owner on operation and maintenance.
14. Leave "INSTALLATION" and "USE AND CARE" instructions with owner.

XVI. OPERATION

Most single phase units are operated PSC (no start relay or start capacitor). It is important that such systems be off for a minimum of 5 minutes before restarting to allow equalization of pressures. The thermostat should not be moved to cycle unit without waiting five minutes. To do so may cause the compressor to stop on an automatic open overload device or blow a fuse. Poor electrical service can cause nuisance tripping in overloads or blow fuses.

IMPORTANT: *The compressor has an internal overload protector. Under some conditions, it can take up to 2 hours for this overload to reset. Make sure overload has had time to reset before condemning the compressor.*

Some units are equipped with a time delay control (TDC1). The control allows the blower to operate for up to 60 seconds after the thermostat is satisfied.

XVII. AUXILIARY HEAT

WARNING

ONLY ELECTRIC HEATER KITS SUPPLIED BY THIS MANUFACTURER AS DESCRIBED IN THIS PUBLICATION HAVE BEEN DESIGNED, TESTED, AND EVALUATED BY A NATIONALLY RECOGNIZED SAFETY TESTING AGENCY FOR USE WITH THIS UNIT. USE OF ANY OTHER MANUFACTURED ELECTRIC HEATERS INSTALLED WITHIN THIS UNIT MAY CAUSE HAZARDOUS CONDITIONS RESULTING IN PROPERTY DAMAGE, FIRE, BODILY INJURY OR DEATH.

CONTROL SYSTEM OPERATION

1. In the cooling mode, the thermostat will, on a call for cooling, energize the compressor contactor and the indoor blower relay. The indoor blower can be operated continuously by setting the thermostat fan switch at the "ON" position.
2. In the heating mode, the thermostat will energize one or more supplementary resistance heaters.

XVIII. GENERAL DATA - RLNL MODELS

NOMINAL SIZES 3-5 TONS [10.6-17.6 kW]

Model RLNL- Series	A036CK	A036CL	A036CM	A036DK
Cooling Performance¹				Continued ->
Gross Cooling Capacity Btu [kW]	36,800 [10.78]	36,800 [10.78]	36,800 [10.78]	36,800 [10.78]
EER/SEER ²	11.4/13	11.4/13	11.4/13	11.4/13
Nominal CFM/AHRI Rated CFM [L/s]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]
AHRI Net Cooling Capacity Btu [kW]	35,400 [10.37]	35,400 [10.37]	35,400 [10.37]	35,400 [10.37]
Net Sensible Capacity Btu [kW]	26,200 [7.68]	26,200 [7.68]	26,200 [7.68]	26,200 [7.68]
Net Latent Capacity Btu [kW]	9,200 [2.7]	9,200 [2.7]	9,200 [2.7]	9,200 [2.7]
Net System Power kW	3.1	3.1	3.1	3.1
Compressor				
No./Type	1/Copeland Scroll	1/Copeland Scroll	1/Copeland Scroll	1/Copeland Scroll
Outdoor Sound Rating (dB)⁵	78	78	78	78
Outdoor Coil - Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]
Indoor Coil - Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan - Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP			
Motor RPM	1075	1075	1075	1075
Indoor Fan - Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Direct/3	Belt/Variable	Belt/Variable	Direct/3
No. Motors	1	1	1	1
Motor HP	1/2	1/2	3/4	1/2
Motor RPM	1075	1725	1725	1075
Motor Frame Size	48	48	56	48
Filter - Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(NO.) Size Recommended in. [mm x mm x mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	96 [2722]	96 [2722]	96 [2722]	96 [2722]
Weights				
Net Weight lbs. [kg]	543 [246]	543 [246]	543 [246]	543 [246]
Ship Weight lbs. [kg]	550 [249]	550 [249]	550 [249]	550 [249]

NOTES:

- Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
- EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
- Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.

GENERAL DATA - RLNL MODELS

NOMINAL SIZES 3-5 TONS [10.6-17.6 kW]

Model RLNL- Series	A036DL	A036DM	A036JK	A036YL
Cooling Performance¹				Continued ->
Gross Cooling Capacity Btu [kW]	36,800 [10.78]	36,800 [10.78]	36,800 [10.78]	36,800 [10.78]
EER/SEER ²	11.4/13	11.4/13	11.4/13	11.4/13
Nominal CFM/AHRI Rated CFM [L/s]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]
AHRI Net Cooling Capacity Btu [kW]	35,400 [10.37]	35,400 [10.37]	35,400 [10.37]	35,400 [10.37]
Net Sensible Capacity Btu [kW]	26,200 [7.68]	26,200 [7.68]	26,200 [7.68]	26,200 [7.68]
Net Latent Capacity Btu [kW]	9,200 [2.7]	9,200 [2.7]	9,200 [2.7]	9,200 [2.7]
Net System Power kW	3.1	3.1	3.1	3.1
Compressor				
No./Type	1/Copeland Scroll	1/Copeland Scroll	1/Copeland Scroll	1/Copeland Scroll
Outdoor Sound Rating (dB)⁵	78	78	78	78
Outdoor Coil - Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]
Indoor Coil - Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan - Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP			
Motor RPM	1075	1075	1075	1075
Indoor Fan - Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Direct/3	Belt/Variable
No. Motors	1	1	1	1
Motor HP	1/2	3/4	1/2	3/4
Motor RPM	1725	1725	1075	1725
Motor Frame Size	48	56	48	56
Filter - Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(NO.) Size Recommended in. [mm x mm x mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	96 [2722]	96 [2722]	96 [2722]	96 [2722]
Weights				
Net Weight lbs. [kg]	543 [246]	543 [246]	543 [246]	543 [246]
Ship Weight lbs. [kg]	550 [249]	550 [249]	550 [249]	550 [249]

NOTES:

- Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
- EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
- Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.

GENERAL DATA - RLNL MODELS

NOMINAL SIZES 3-5 TONS [10.6-17.6 kW]

Model RLNL- Series	A036YM	A042CK	A042CL	A042CM
Cooling Performance¹				Continued ->
Gross Cooling Capacity Btu [kW]	36,800 [10.78]	42,500 [12.45]	42,500 [12.45]	42,500 [12.45]
EER/SEER ²	11.4/13	11.2/13	11.2/13	11.2/13
Nominal CFM/AHRI Rated CFM [L/s]	1200/1200 [566/566]	1400/1450 [661/684]	1400/1450 [661/684]	1400/1450 [661/684]
AHRI Net Cooling Capacity Btu [kW]	35,400 [10.37]	40,500 [11.87]	40,500 [11.87]	40,500 [11.87]
Net Sensible Capacity Btu [kW]	26,200 [7.68]	30,600 [8.97]	30,600 [8.97]	30,600 [8.97]
Net Latent Capacity Btu [kW]	9,200 [2.7]	9,900 [2.9]	9,900 [2.9]	9,900 [2.9]
Net System Power kW	3.1	3.62	3.62	3.62
Compressor				
No./Type	1/Copeland Scroll	1/Copeland Scroll	1/Copeland Scroll	1/Copeland Scroll
Outdoor Sound Rating (dB)⁵	78	78	78	78
Outdoor Coil - Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1 / 22 [9]	1.53 / 22 [9]	1.53 / 22 [9]	1.53 / 22 [9]
Indoor Coil - Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	2 / 17 [7]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan - Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP			
Motor RPM	1075	1075	1075	1075
Indoor Fan - Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Direct/3	Belt/Variable	Belt/Variable
No. Motors	1	1	1	1
Motor HP	3/4	1/2	1/2	3/4
Motor RPM	1725	1075	1725	1725
Motor Frame Size	56	48	48	56
Filter - Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(NO.) Size Recommended in. [mm x mm x mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	96 [2722]	125 [3544]	125 [3544]	125 [3544]
Weights				
Net Weight lbs. [kg]	543 [246]	570 [259]	570 [259]	570 [259]
Ship Weight lbs. [kg]	550 [249]	577 [262]	577 [262]	577 [262]

NOTES:

- Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
- EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
- Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.

GENERAL DATA - RLNL MODELS

NOMINAL SIZES 3-5 TONS [10.6-17.6 kW]

Model RLNL- Series	A042DK	A042DL	A042DM	A042JK
Cooling Performance¹				Continued ->
Gross Cooling Capacity Btu [kW]	42,500 [12.45]	42,500 [12.45]	42,500 [12.45]	42,500 [12.45]
EER/SEER ²	11.2/13	11.2/13	11.2/13	11.2/13
Nominal CFM/AHRI Rated CFM [L/s]	1400/1450 [661/684]	1400/1450 [661/684]	1400/1450 [661/684]	1400/1450 [661/684]
AHRI Net Cooling Capacity Btu [kW]	40,500 [11.87]	40,500 [11.87]	40,500 [11.87]	40,500 [11.87]
Net Sensible Capacity Btu [kW]	30,600 [8.97]	30,600 [8.97]	30,600 [8.97]	30,600 [8.97]
Net Latent Capacity Btu [kW]	9,900 [2.9]	9,900 [2.9]	9,900 [2.9]	9,900 [2.9]
Net System Power kW	3.62	3.62	3.62	3.62
Compressor				
No./Type	1/Copeland Scroll	1/Copeland Scroll	1/Copeland Scroll	1/Copeland Scroll
Outdoor Sound Rating (dB)⁵	78	78	78	78
Outdoor Coil - Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1.53 / 22 [9]	1.53 / 22 [9]	1.53 / 22 [9]	1.53 / 22 [9]
Indoor Coil - Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan - Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP			
Motor RPM	1075	1075	1075	1075
Indoor Fan - Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Direct/3	Belt/Variable	Belt/Variable	Direct/3
No. Motors	1	1	1	1
Motor HP	1/2	1/2	3/4	1/2
Motor RPM	1075	1725	1725	1075
Motor Frame Size	48	48	56	48
Filter - Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(NO.) Size Recommended in. [mm x mm x mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	125 [3544]	125 [3544]	125 [3544]	125 [3544]
Weights				
Net Weight lbs. [kg]	570 [259]	570 [259]	570 [259]	570 [259]
Ship Weight lbs. [kg]	577 [262]	577 [262]	577 [262]	577 [262]

NOTES:

- Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
- EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
- Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.

GENERAL DATA - RLNL MODELS

NOMINAL SIZES 3-5 TONS [10.6-17.6 kW]

Model RLNL- Series	A048CK	A048CL	A048CM	A048DK
Cooling Performance¹				Continued ->
Gross Cooling Capacity Btu [kW]	50,000 [14.65]	50,000 [14.65]	50,000 [14.65]	50,000 [14.65]
EER/SEER ²	11.45/13	11.45/13	11.45/13	11.45/13
Nominal CFM/AHRI Rated CFM [L/s]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]
AHRI Net Cooling Capacity Btu [kW]	48,000 [14.06]	48,000 [14.06]	48,000 [14.06]	48,000 [14.06]
Net Sensible Capacity Btu [kW]	35,600 [10.43]	35,600 [10.43]	35,600 [10.43]	35,600 [10.43]
Net Latent Capacity Btu [kW]	12,400 [3.63]	12,400 [3.63]	12,400 [3.63]	12,400 [3.63]
Net System Power kW	4.19	4.19	4.19	4.19
Compressor				
No./Type	1/Copeland Scroll	1/Copeland Scroll	1/Copeland Scroll	1/Copeland Scroll
Outdoor Sound Rating (dB)⁵	78	78	78	78
Outdoor Coil - Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil - Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan - Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP			
Motor RPM	1075	1075	1075	1075
Indoor Fan - Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Direct/3	Belt/Variable	Belt/Variable	Direct/3
No. Motors	1	1	1	1
Motor HP	1/2	1/2	3/4	1/2
Motor RPM	1075	1725	1725	1075
Motor Frame Size	48	48	56	48
Filter - Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(NO.) Size Recommended in. [mm x mm x mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	165 [4678]	165 [4678]	165 [4678]	165 [4678]
Weights				
Net Weight lbs. [kg]	580 [263]	580 [263]	580 [263]	580 [263]
Ship Weight lbs. [kg]	587 [266]	587 [266]	587 [266]	587 [266]

NOTES:

- Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
- EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
- Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.

GENERAL DATA - RLNL MODELS

NOMINAL SIZES 3-5 TONS [10.6-17.6 kW]

Model RLNL- Series	A048DL	A048DM	A048JK	A048YL
Cooling Performance¹				Continued ->
Gross Cooling Capacity Btu [kW]	50,000 [14.65]	50,000 [14.65]	50,000 [14.65]	50,000 [14.65]
EER/SEER ²	11.45/13	11.45/13	11.45/13	11.45/13
Nominal CFM/AHRI Rated CFM [L/s]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]
AHRI Net Cooling Capacity Btu [kW]	48,000 [14.06]	48,000 [14.06]	48,000 [14.06]	48,000 [14.06]
Net Sensible Capacity Btu [kW]	35,600 [10.43]	35,600 [10.43]	35,600 [10.43]	35,600 [10.43]
Net Latent Capacity Btu [kW]	12,400 [3.63]	12,400 [3.63]	12,400 [3.63]	12,400 [3.63]
Net System Power kW	4.19	4.19	4.19	4.19
Compressor				
No./Type	1/Copeland Scroll	1/Copeland Scroll	1/Copeland Scroll	1/Copeland Scroll
Outdoor Sound Rating (dB)⁵	78	78	78	78
Outdoor Coil - Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil - Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan - Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP			
Motor RPM	1075	1075	1075	1075
Indoor Fan - Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Direct/3	Belt/Variable
No. Motors	1	1	1	1
Motor HP	1/2	3/4	1/2	3/4
Motor RPM	1725	1725	1075	1725
Motor Frame Size	48	56	48	56
Filter - Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(NO.) Size Recommended in. [mm x mm x mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	165 [4678]	165 [4678]	165 [4678]	165 [4678]
Weights				
Net Weight lbs. [kg]	580 [263]	580 [263]	580 [263]	580 [263]
Ship Weight lbs. [kg]	587 [266]	587 [266]	587 [266]	587 [266]

NOTES:

- Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
- EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
- Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.

GENERAL DATA - RLNL MODELS

NOMINAL SIZES 3-5 TONS [10.6-17.6 kW]

Model RLNL- Series	A048YM	A060CK	A060CL	A060CM
Cooling Performance¹				Continued ->
Gross Cooling Capacity Btu [kW]	50,000 [14.65]	61,000 [17.87]	61,000 [17.87]	61,000 [17.87]
EER/SEER ²	11.45/13	11.1/13	11.1/13	11.1/13
Nominal CFM/AHRI Rated CFM [L/s]	1600/1600 [755/755]	2000/1900 [944/897]	2000/1900 [944/897]	2000/1900 [944/897]
AHRI Net Cooling Capacity Btu [kW]	48,000 [14.06]	59,000 [17.29]	59,000 [17.29]	59,000 [17.29]
Net Sensible Capacity Btu [kW]	35,600 [10.43]	42,000 [12.31]	42,000 [12.31]	42,000 [12.31]
Net Latent Capacity Btu [kW]	12,400 [3.63]	17,000 [4.98]	17,000 [4.98]	17,000 [4.98]
Net System Power kW	4.19	5.32	5.32	5.32
Compressor				
No./Type	1/Copeland Scroll	1/Copeland Scroll	1/Copeland Scroll	1/Copeland Scroll
Outdoor Sound Rating (dB)⁵	78	83	83	83
Outdoor Coil - Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil - Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan - Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3930 [1855]	3930 [1855]	3930 [1855]
No. Motors/HP	1 at 1/3 HP			
Motor RPM	1075	1075	1075	1075
Indoor Fan - Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Direct/3	Belt/Variable	Belt/Variable
No. Motors	1	1	1	1
Motor HP	3/4	1	3/4	1
Motor RPM	1725	1075	1725	1725
Motor Frame Size	56	48	56	56
Filter - Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(NO.) Size Recommended in. [mm x mm x mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	165 [4678]	160 [4536]	160 [4536]	160 [4536]
Weights				
Net Weight lbs. [kg]	580 [263]	590 [268]	590 [268]	590 [268]
Ship Weight lbs. [kg]	587 [266]	597 [271]	597 [271]	597 [271]

NOTES:

- Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
- EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
- Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.

GENERAL DATA - RLNL MODELS

NOMINAL SIZES 3-5 TONS [10.6-17.6 kW]

Model RLNL- Series	A060DK	A060DL	A060DM	A060JK
Cooling performance¹				Continued ->
Gross Cooling Capacity Btu [kW]	61,000 [17.87]	61,000 [17.87]	61,000 [17.87]	61,000 [17.87]
EER, SEER ²	11.1/13	11.1/13	11.1/13	11.1/13
Nominal CFM/AHRI Rated CFM [L/s]	2000/1900 [944/897]	2000/1900 [944/897]	2000/1900 [944/897]	2000/1900 [944/897]
AHRI Net Cooling Capacity Btu [kW]	59,000 [1729]	59,000 [1729]	59,000 [1729]	59,000 [1729]
Net Sensible Capacity Btu [kW]	42,000 [1231]	42,000 [1231]	42,000 [1231]	42,000 [1231]
Net Latent Capacity Btu [kW]	17,000 [4.98]	17,000 [4.98]	17,000 [4.98]	17,000 [4.98]
Net System Power kW	5.32	5.32	5.32	5.32
Compressor				
No./Type	1/Copeland Scroll	1/Copeland Scroll	1/Copeland Scroll	1/Copeland Scroll
Outdoor Sound Rating (dB)⁵	83	83	83	83
Outdoor Coil - Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil - Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan - Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3930 [1855]	3930 [1855]	3930 [1855]	3930 [1855]
No. Motors/HP	1 at 1/3 HP			
Motor RPM	1075	1075	1075	1075
Indoor Fan - Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Direct/3	Belt/Variable	Belt/Variable	Direct/3
No. Motors	1	1	1	1
Motor HP	1	1	1	1
Motor RPM	1075	1725	1725	1075
Motor Frame Size	48	56	56	48
Filter - Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(NO.) Size Recommended in. [mm x mm x mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	160 [4536]	160 [4536]	160 [4536]	160 [4536]
Weights				
Net Weight lbs. [kg]	590 [268]	590 [268]	590 [268]	590 [268]
Ship Weight lbs. [kg]	597 [271]	597 [271]	597 [271]	597 [271]

NOTES:

- Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
- EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
- Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.

GENERAL DATA - RLNL MODELS

NOMINAL SIZES 3-5 TONS [10.6-17.6 kW]

Model RLNL- Series	A060YL	A060YM
Cooling performance¹		
Gross Cooling Capacity Btu [kW]	61,000 [17.87]	61,000 [17.87]
EER, SEER ²	11.1/13	11.1/13
Nominal CFM/AHRI Rated CFM [L/s]	2000/1900 [944/897]	2000/1900 [944/897]
AHRI Net Cooling Capacity Btu [kW]	59,000 [1729]	59,000 [1729]
Net Sensible Capacity Btu [kW]	42,000 [1231]	42,000 [1231]
Net Latent Capacity Btu [kW]	17,000 [4.98]	17,000 [4.98]
Net System Power kW	5.32	5.32
Compressor		
No./Type	1/Copeland Scroll	1/Copeland Scroll
Outdoor Sound Rating (dB)⁵		
	83	83
Outdoor Coil - Fin Type		
	Louvered	Louvered
Tube Type	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]
Indoor Coil - Fin Type		
	Corrugated	Corrugated
Tube Type	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan - Type		
	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1
CFM [L/s]	3930 [1855]	3930 [1855]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075
Indoor Fan - Type		
	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable
No. Motors	1	1
Motor HP	3/4	1
Motor RPM	1725	1725
Motor Frame Size	56	56
Filter - Type		
	Disposable	Disposable
Furnished	Yes	Yes
(NO.) Size Recommended in. [mm x mm x mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]		
	160 [4536]	160 [4536]
Weights		
Net Weight lbs. [kg]	590 [268]	590 [268]
Ship Weight lbs. [kg]	597 [271]	597 [271]

NOTES:

- Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
- EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
- Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.

GENERAL DATA - RLPL MODELS

NOMINAL SIZES 3-5 TONS [10.6-17.6 kW]

Model RLPL- Series	A036CK	A036CL	A036CM	A036DK
Cooling Performance¹				Continued ->
Gross Cooling Capacity Btu [kW]	36,600 [10.72]	36,600 [10.72]	36,600 [10.72]	36,600 [10.72]
EER/SEER ²	12.05/14	12.05/14	12.05/14	12.05/14
Nominal CFM/AHRI Rated CFM [L/s]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]
AHRI Net Cooling Capacity Btu [kW]	35,800 [10.49]	35,800 [10.49]	35,800 [10.49]	35,800 [10.49]
Net Sensible Capacity Btu [kW]	27,000 [7.91]	27,000 [7.91]	27,000 [7.91]	27,000 [7.91]
Net Latent Capacity Btu [kW]	8,800 [2.58]	8,800 [2.58]	8,800 [2.58]	8,800 [2.58]
Net System Power kW	2.97	2.97	2.97	2.97
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁵	78	78	78	78
Outdoor Coil - Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]
Indoor Coil - Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan - Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP			
Motor RPM	1075	1075	1075	1075
Indoor Fan - Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Direct/4	Belt/Variable	Belt/Variable	Direct/4
No. Motors	1	1	1	1
Motor HP	1/2	1/2	3/4	1/2
Motor RPM	1075	1725	1725	1075
Motor Frame Size	48	48	56	48
Filter - Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(NO.) Size Recommended in. [mm x mm x mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	96 [2722]	96 [2722]	96 [2722]	96 [2722]
Weights				
Net Weight lbs. [kg]	543 [246]	543 [246]	543 [246]	543 [246]
Ship Weight lbs. [kg]	550 [249]	550 [249]	550 [249]	550 [249]

NOTES:

- Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
- EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
- Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.

GENERAL DATA - RLPL MODELS

NOMINAL SIZES 3-5 TONS [10.6-17.6 kW]

Model RLPL- Series	A036DL	A036DM	A036JK	A042CK
Cooling Performance¹				Continued ->
Gross Cooling Capacity Btu [kW]	36,600 [10.72]	36,600 [10.72]	36,600 [10.72]	43,000 [12.6]
EER/SEER ²	12.05/14	12.05/14	12.05/14	12/14
Nominal CFM/AHRI Rated CFM [L/s]	1200/1200 [566/566]	1200/1200 [566/566]	1200/1200 [566/566]	1400/1450 [661/684]
AHRI Net Cooling Capacity Btu [kW]	35,800 [10.49]	35,800 [10.49]	35,800 [10.49]	41,500 [12.16]
Net Sensible Capacity Btu [kW]	27,000 [7.91]	27,000 [7.91]	27,000 [7.91]	31,200 [9.14]
Net Latent Capacity Btu [kW]	8,800 [2.58]	8,800 [2.58]	8,800 [2.58]	10,300 [3.02]
Net System Power kW	2.97	2.97	2.97	3.5
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁵	78	78	78	78
Outdoor Coil - Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]	1.53 / 22 [9]
Indoor Coil - Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	2 / 17 [7]	2 / 17 [7]	2 / 17 [7]	3 / 13 [5]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan - Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP			
Motor RPM	1075	1075	1075	1075
Indoor Fan - Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Direct/4	Direct/4
No. Motors	1	1	1	1
Motor HP	1/2	3/4	1/2	3/4
Motor RPM	1725	1725	1075	1075
Motor Frame Size	48	56	48	48
Filter - Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(NO.) Size Recommended in. [mm x mm x mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	96 [2722]	96 [2722]	96 [2722]	125 [3544]
Weights				
Net Weight lbs. [kg]	543 [246]	543 [246]	543 [246]	570 [259]
Ship Weight lbs. [kg]	550 [249]	550 [249]	550 [249]	577 [262]

NOTES:

- Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
- EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
- Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.

GENERAL DATA - RLPL MODELS

NOMINAL SIZES 3-5 TONS [10.6-17.6 kW]

Model RLPL- Series	A042CL	A042CM	A042DK	A042DL
Cooling Performance¹				Continued ->
Gross Cooling Capacity Btu [kW]	43,000 [12.6]	43,000 [12.6]	43,000 [12.6]	43,000 [12.6]
EER/SEER ²	12/14	12/14	12/14	12/14
Nominal CFM/AHRI Rated CFM [L/s]	1400/1450 [661/684]	1400/1450 [661/684]	1400/1450 [661/684]	1400/1450 [661/684]
AHRI Net Cooling Capacity Btu [kW]	41,500 [12.16]	41,500 [12.16]	41,500 [12.16]	41,500 [12.16]
Net Sensible Capacity Btu [kW]	31,200 [9.14]	31,200 [9.14]	31,200 [9.14]	31,200 [9.14]
Net Latent Capacity Btu [kW]	10,300 [3.02]	10,300 [3.02]	10,300 [3.02]	10,300 [3.02]
Net System Power kW	3.5	3.5	3.5	3.5
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁵	78	78	78	78
Outdoor Coil - Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]	16.91 [1.57]
Rows / FPI [FPcm]	1.53 / 22 [9]	1.53 / 22 [9]	1.53 / 22 [9]	1.53 / 22 [9]
Indoor Coil - Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan - Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP			
Motor RPM	1075	1075	1075	1075
Indoor Fan - Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Belt/Variable	Direct/4	Belt/Variable
No. Motors	1	1	1	1
Motor HP	1/2	3/4	3/4	1/2
Motor RPM	1725	1725	1075	1725
Motor Frame Size	48	56	48	48
Filter - Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(NO.) Size Recommended in. [mm x mm x mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	125 [3544]	125 [3544]	125 [3544]	125 [3544]
Weights				
Net Weight lbs. [kg]	570 [259]	570 [259]	570 [259]	570 [259]
Ship Weight lbs. [kg]	577 [262]	577 [262]	577 [262]	577 [262]

NOTES:

- Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
- EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
- Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.

GENERAL DATA - RLPL MODELS

NOMINAL SIZES 3-5 TONS [10.6-17.6 kW]

Model RLPL- Series	A042DM	A042JK	A048CK	A048CL
Cooling Performance¹				Continued ->
Gross Cooling Capacity Btu [kW]	43,000 [12.6]	43,000 [12.6]	50,500 [14.8]	50,500 [14.8]
EER/SEER ²	12/14	12/14	12.15/14	12.15/14
Nominal CFM/AHRI Rated CFM [L/s]	1400/1450 [661/684]	1400/1450 [661/684]	1600/1600 [755/755]	1600/1600 [755/755]
AHRI Net Cooling Capacity Btu [kW]	41,500 [12.16]	41,500 [12.16]	49,000 [14.36]	49,000 [14.36]
Net Sensible Capacity Btu [kW]	31,200 [9.14]	31,200 [9.14]	36,400 [10.67]	36,400 [10.67]
Net Latent Capacity Btu [kW]	10,300 [3.02]	10,300 [3.02]	12,600 [3.69]	12,600 [3.69]
Net System Power kW	3.5	3.5	4.03	4.03
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁵	78	78	78	78
Outdoor Coil - Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.91 [1.57]	16.91 [1.57]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	1.53 / 22 [9]	1.53 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil - Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 13 [5]	3 / 13 [5]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan - Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP			
Motor RPM	1075	1075	1075	1075
Indoor Fan - Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Direct/4	Direct/4	Belt/Variable
No. Motors	1	1	1	1
Motor HP	3/4	3/4	3/4	1/2
Motor RPM	1725	1075	1075	1725
Motor Frame Size	56	48	48	48
Filter - Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(NO.) Size Recommended in. [mm x mm x mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	125 [3544]	125 [3544]	165 [4678]	165 [4678]
Weights				
Net Weight lbs. [kg]	570 [259]	570 [259]	580 [263]	580 [263]
Ship Weight lbs. [kg]	577 [262]	577 [262]	587 [266]	587 [266]

NOTES:

- Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
- EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
- Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.

GENERAL DATA - RLPL MODELS

NOMINAL SIZES 3-5 TONS [10.6-17.6 kW]

Model RLPL- Series	A048CM	A048DK	A048DL	A048DM
Cooling Performance¹				Continued ->
Gross Cooling Capacity Btu [kW]	50,500 [14.8]	50,500 [14.8]	50,500 [14.8]	50,500 [14.8]
EER/SEER ²	12.15/14	12.15/14	12.15/14	12.15/14
Nominal CFM/AHRI Rated CFM [L/s]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]	1600/1600 [755/755]
AHRI Net Cooling Capacity Btu [kW]	49,000 [14.36]	49,000 [14.36]	49,000 [14.36]	49,000 [14.36]
Net Sensible Capacity Btu [kW]	36,400 [10.67]	36,400 [10.67]	36,400 [10.67]	36,400 [10.67]
Net Latent Capacity Btu [kW]	12,600 [3.69]	12,600 [3.69]	12,600 [3.69]	12,600 [3.69]
Net System Power kW	4.03	4.03	4.03	4.03
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁵	78	78	78	78
Outdoor Coil - Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil - Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan - Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3680 [1737]	3680 [1737]	3680 [1737]
No. Motors/HP	1 at 1/3 HP			
Motor RPM	1075	1075	1075	1075
Indoor Fan - Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Belt/Variable	Direct/4	Belt/Variable	Belt/Variable
No. Motors	1	1	1	1
Motor HP	3/4	3/4	1/2	3/4
Motor RPM	1725	1075	1725	1725
Motor Frame Size	56	48	48	56
Filter - Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(NO.) Size Recommended in. [mm x mm x mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	165 [4678]	165 [4678]	165 [4678]	165 [4678]
Weights				
Net Weight lbs. [kg]	580 [263]	580 [263]	580 [263]	580 [263]
Ship Weight lbs. [kg]	587 [266]	587 [266]	587 [266]	587 [266]

NOTES:

- Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
- EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
- Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.

GENERAL DATA - RLPL MODELS

NOMINAL SIZES 3-5 TONS [10.6-17.6 kW]

Model RLPL- Series	A048JK	A060CK	A060CL	A060CM
Cooling Performance¹				Continued ->
Gross Cooling Capacity Btu [kW]	50,500 [14.8]	61,500 [18.02]	61,500 [18.02]	61,500 [18.02]
EER/SEER ²	12.15/14	12.25/14	12.25/14	12.25/14
Nominal CFM/AHRI Rated CFM [L/s]	1600/1600 [755/755]	2000/1850 [944/873]	2000/1850 [944/873]	2000/1850 [944/873]
AHRI Net Cooling Capacity Btu [kW]	49,000 [14.36]	60,000 [17.58]	60,000 [17.58]	60,000 [17.58]
Net Sensible Capacity Btu [kW]	36,400 [10.67]	42,500 [12.45]	42,500 [12.45]	42,500 [12.45]
Net Latent Capacity Btu [kW]	12,600 [3.69]	17,500 [5.13]	17,500 [5.13]	17,500 [5.13]
Net System Power kW	4.03	4.9	4.9	4.9
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁵	78	83	83	83
Outdoor Coil - Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil - Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan - Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3680 [1737]	3930 [1855]	3930 [1855]	3930 [1855]
No. Motors/HP	1 at 1/3 HP			
Motor RPM	1075	1075	1075	1075
Indoor Fan - Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/10x10 [254x254]	1/11x10 [279x254]	1/11x10 [279x254]
Drive Type/No. Speeds	Direct/4	Direct/3	Belt/Variable	Belt/Variable
No. Motors	1	1	1	1
Motor HP	3/4	1	3/4	1
Motor RPM	1075	1075	1725	1725
Motor Frame Size	48	48	56	56
Filter - Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(NO.) Size Recommended in. [mm x mm x mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	165 [4678]	147 [4167]	147 [4167]	147 [4167]
Weights				
Net Weight lbs. [kg]	580 [263]	590 [268]	590 [268]	590 [268]
Ship Weight lbs. [kg]	587 [266]	597 [271]	597 [271]	597 [271]

NOTES:

- Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
- EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
- Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.

GENERAL DATA - RLPL MODELS

NOMINAL SIZES 3-5 TONS [10.6-17.6 kW]

Model RLPL- Series	A060DK	A060DL	A060DM	A060JK
Cooling Performance¹				Continued ->
Gross Cooling Capacity Btu [kW]	61,500 [18.02]	61,500 [18.02]	61,500 [18.02]	61,500 [18.02]
EER/SEER ²	12.25/14	12.25/14	12.25/14	12.25/14
Nominal CFM/AHRI Rated CFM [L/s]	2000/1850 [944/873]	2000/1850 [944/873]	2000/1850 [944/873]	2000/1850 [944/873]
AHRI Net Cooling Capacity Btu [kW]	60,000 [17.58]	60,000 [17.58]	60,000 [17.58]	60,000 [17.58]
Net Sensible Capacity Btu [kW]	42,500 [12.45]	42,500 [12.45]	42,500 [12.45]	42,500 [12.45]
Net Latent Capacity Btu [kW]	17,500 [5.13]	17,500 [5.13]	17,500 [5.13]	17,500 [5.13]
Net System Power kW	4.9	4.9	4.9	4.9
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)⁵	83	83	83	83
Outdoor Coil - Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]	16.56 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil - Fin Type	Corrugated	Corrugated	Corrugated	Corrugated
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]	5.17 [0.48]
Rows / FPI [FPcm]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]	3 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan - Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3930 [1855]	3930 [1855]	3930 [1855]	3930 [1855]
No. Motors/HP	1 at 1/3 HP			
Motor RPM	1075	1075	1075	1075
Indoor Fan - Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x10 [254x254]	1/11x10 [279x254]	1/11x10 [279x254]	1/10x10 [254x254]
Drive Type/No. Speeds	Direct/3	Belt/Variable	Belt/Variable	Direct/3
No. Motors	1	1	1	1
Motor HP	1	3/4	1	1
Motor RPM	1075	1725	1725	1075
Motor Frame Size	48	56	56	48
Filter - Type	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(NO.) Size Recommended in. [mm x mm x mm]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]	(1)1x16x25 [25x406x635]
Refrigerant Charge Oz. [g]	147 [4167]	147 [4167]	147 [4167]	147 [4167]
Weights				
Net Weight lbs. [kg]	590 [268]	590 [268]	590 [268]	590 [268]
Ship Weight lbs. [kg]	597 [271]	597 [271]	597 [271]	597 [271]

NOTES:

- Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
- EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
- Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.

XIX. MISCELLANEOUS

ELECTRICAL DATA - RLNL SERIES										
		-A036CK	-A036CL	-A036CM	-A036DK	-A036DL	-A036DM	-A036JK	-A036YL	-A036YM
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	414-506	414-506	414-506	187-253	517-633	517-633
	Minimum Circuit Ampacity	19/19	18/18	18/18	11	10	10	27/27	7	7
	Minimum Overcurrent Protection Device Size	25/25	20/20	25/25	15	15	15	35/35	15	15
	Maximum Overcurrent Protection Device Size	25/25	25/25	25/25	15	15	15	40/40	15	15
Compressor Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	460	460	460	208/230	575	575
	Phase	3	3	3	3	3	3	1	3	3
	HP	3	3	3	3	3	3	3	3	3
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	10.4/10.4	10.4/10.4	10.4/10.4	5.8	5.8	5.8	16.7/16.7	3.8	3.8
	Amps (LRA)	88/88	88/88	88/88	38	38	38	79/79	36.5	36.5
Condenser Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	460	460	460	208/230	575	575
	Phase	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1.5	1.5	1.5	1	1	1	1.5	0.8	0.8
	Amps (LRA)	3	3	3	1.9	1.9	1.9	3	1.9	1.9
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	460	460	460	208/230	575	575
	Phase	1	3	3	1	3	3	1	3	3
	HP	1/2	1/2	3/4	1/2	1/2	3/4	1/2	3/4	3/4
	Amps (FLA)	4	2.8	3.4	2	1.4	1.6	4	1.3	1.3
	Amps (LRA)	6.7	11.3	16.8	3.6	6.2	8.4	6.7	6	6

ELECTRICAL DATA - RLNL SERIES								
		-A042CK	-A042CL	-A042CM	-A042DK	-A042DL	-A042DM	-A042JK
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	414-506	414-506	414-506	187-253
	Minimum Circuit Ampacity	23/23	22/22	22/22	11	10	11	28/28
	Minimum Overcurrent Protection Device Size	30/30	25/25	30/30	15	15	15	35/35
	Maximum Overcurrent Protection Device Size	35/35	30/30	35/35	15	15	15	45/45
Compressor Motor	No.	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	460	460	460	208/230
	Phase	3	3	3	3	3	3	1
	HP	3 1/2	3 1/2	3 1/2	3 1/2	3 1/2	3 1/2	3 1/2
	RPM	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	13.5/13.5	13.5/13.5	13.5/13.5	6	6	6	17.9/17.9
	Amps (LRA)	88/88	88/88	88/88	44	44	44	112/112
Condenser Motor	No.	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	460	460	460	208/230
	Phase	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1.5	1.5	1.5	1	1	1	1.5
	Amps (LRA)	3	3	3	1.9	1.9	1.9	3
Evaporator Fan	No.	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	460	460	460	208/230
	Phase	1	3	3	1	3	3	1
	HP	1/2	1/2	3/4	1/2	1/2	3/4	1/2
	Amps (FLA)	4	2.8	3.4	2	1.4	1.6	4
	Amps (LRA)	6.7	11.3	16.8	3.6	6.2	8.4	6.7

ELECTRICAL DATA - RLNL SERIES										
		-A048CK	-A048CL	-A048CM	-A048DK	-A048DL	-A048DM	-A048JK	-A048YL	-A048YM
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	414-506	414-506	414-506	187-253	517-633	517-633
	Minimum Circuit Ampacity	23/23	22/22	23/23	11	11	11	33/33	9	9
	Minimum Overcurrent Protection Device Size	30/30	25/25	30/30	15	15	15	40/40	15	15
	Maximum Overcurrent Protection Device Size	35/35	35/35	35/35	15	15	15	50/50	15	15
Compressor Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	460	460	460	208/230	575	575
	Phase	3	3	3	3	3	3	1	3	3
	HP	4	4	4	4	4	4	4	4	4
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	13.7/13.7	13.7/13.7	13.7/13.7	6.2	6.2	6.2	21.8/21.8	4.8	4.8
	Amps (LRA)	83.1/83.1	83.1/83.1	83.1/83.1	41	41	41	117/117	33	33
Condenser Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	460	460	460	208/230	575	575
	Phase	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1.5	1.5	1.5	1	1	1	1.5	0.8	0.8
	Amps (LRA)	3	3	3	1.9	1.9	1.9	3	1.9	1.9
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	460	460	460	208/230	575	575
	Phase	1	3	3	1	3	3	1	3	3
	HP	1/2	1/2	3/4	1/2	1/2	3/4	1/2	3/4	3/4
	Amps (FLA)	4	2.8	3.4	2	1.4	1.6	4	1.3	1.3
	Amps (LRA)	6.7	11.3	16.8	3.6	6.2	8.4	6.7	6	6

ELECTRICAL DATA – RLNL SERIES

		-A060CK	-A060CL	-A060CM	-A060DK	-A060DL	-A060DM	A060JK	-A060YL	-A060YM
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	414-506	414-506	414-506	187-253	517-633	517-633
	Minimum Circuit Ampacity	30/30	26/26	26/26	15	13	13	43/43	10	10
	Minimum Overcurrent Protection Device Size	35/35	30/30	30/30	20	15	15	50/50	15	15
	Maximum Overcurrent Protection Device Size	40/40	40/40	40/40	20	20	20	60/60	15	15
Compressor Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	460	460	460	208/230	575	575
	Phase	3	3	3	3	3	3	1	3	3
	HP	5	5	5	5	5	5	5	5	5
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	15.6/15.6	15.6/15.6	15.6/15.6	7.8	7.8	7.8	26.3/26.3	5.8	5.8
	Amps (LRA)	110/110	110/110	110/110	52	52	52	134/134	38.9	38.9
Condenser Motor	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	460	460	460	208/230	575	575
	Phase	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	2.2	2.2	2.2	1	1	1	2.2	0.8	0.8
	Amps (LRA)	4.9	4.9	4.9	1.9	1.9	1.9	4.9	1.9	1.9
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	460	460	460	208/230	575	575
	Phase	1	3	3	1	3	3	1	3	3
	HP	1	3/4	1	1	3/4	1	1	3/4	1
	Amps (FLA)	7.6	3.4	3.8	4	1.6	1.9	7.6	1.3	1.4
	Amps (LRA)	0	16.8	24	0	8.4	12	0	6	7.2

ELECTRICAL DATA – RLPL SERIES

		-A036CK	-A036CL	-A036CM	-A036DK	-A036DL	-A036DM	-A036JK	-A042CK	-A042CL	-A042CM	-A042DK	-A042DL	-A042DM	-A042JK
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	414-506	414-506	414-506	187-253	187-253	187-253	187-253	414-506	414-506	414-506	187-253
	Minimum Circuit Ampacity	19/19	18/18	18/18	11	10	10	27/27	25/25	22/22	22/22	12	10	11	30/30
	Minimum Overcurrent Protection Device Size	25/25	20/209	25/25	15	15	15	35/35	30/30	25/25	30/30	15	15	15	35/35
	Maximum Overcurrent Protection Device Size	25/25	25/25	25/25	15	15	15	40/40	35/35	30.30	35/35	15	15	15	45/45
Compressor Motor	No.	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	460	460	460	208/230	208/230	208/230	208/230	460	460	460	208/230
	Phase	3	3	3	3	3	3	1	3	3	3	3	3	3	1
	HP	3	3	3	3	3	3	3	3 1/2	3 1/2	3 1/2	3 1/2	3 1/2	3 1/2	3 1/2
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	10.4/10.4	10.4/10.4	10.4/10.4	5.8	5.8	5.8	16.7/16.7	13.5/13.5	13.5/13.5	13.5/13.5	6	6	6	17.9/17.9
	Amps (LRA)	88/88	88/88	88/88	38	38	38	79/79	88/88	88/88	88/88	44	44	44	112/112
Condenser Motor	No.	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	460	460	460	208/230	208/230	208/230	208/230	460	460	460	208/230
	Phase	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1.5	1.5	1.5	1	1	1	1.5	1.5	1.5	1.5	1	1	1	1.5
	Amps (LRA)	3	3	3	1.9	1.9	1.9	3	3	3	3	1.9	1.9	1.9	3
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	460	460	460	208/230	208/230	208/230	208/230	460	460	460	208/230
	Phase	1	3	3	1	3	3	1	1	3	3	1	3	3	1
	HP	1/2	1/2	3/4	1/2	1/2	3/4	1/2	3/4	1/2	3/4	3/4	1/2	3/4	3/4
	Amps (FLA)	4.1	2.8	3.4	2.1	1.4	1.6	4.1	6	2.8	3.4	3.2	1.4	1.6	6
	Amps (LRA)	0	11.3	16.8	0	6.2	8.4	0	0	11.3	16.8	0	6.2	8.4	0

ELECTRICAL DATA – RLPL SERIES

		-A048CK	-A048CL	-A048CM	-A048DK	-A048DL	-A048DM	-A048JK	-A060CK	-A060CL	-A060CM	-A060DK	-A060DL	-A060DM	-A060JK
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	414-506	414-506	187-253	187-253	187-253	187-253	187-253	414-506	414-506	414-506	187-253
	Minimum Circuit Ampacity	25/25	22/22	23/23	12	11	11	35/35	30/30	26/26	26/26	15	13	13	43/43
	Minimum Overcurrent Protection Device Size	30/30	25/25	30/30	15	15	15	45/45	35/35	30/30	35/35	20	15	15	50/50
	Maximum Overcurrent Protection Device Size	35/35	35/35	35/35	15	15	15	50/50	45/45	40/40	40/40	20	20	20	60/60
Compressor Motor	No.	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	460	460	460	208/230	208/230	208/230	208/230	460	460	460	208/230
	Phase	3	3	3	3	3	3	1	3	3	3	3	3	3	1
	HP	4	4	4	4	4	4	4	5	5	5	5	5	5	5
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	13.7/13.7	13.7/13.7	13.7/13.7	6.2	6.2	6.2	21.8/21.8	16.16	16/16	16/16	7.8	7.8	7.8	26.4/26.4
	Amps (LRA)	83.1/83.1	83.1/83.1	83.1/83.1	41	41	41	117/117	110/110	110/110	110/110	52	52	52	134/134
Condenser Motor	No.	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	460	460	460	208/230	208/230	208/230	208/230	460	460	460	408/230
	Phase	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1.5	1.5	1.5	1	1	1	1.5	2.2	2.2	2.2	1	1	1	2.2
	Amps (LRA)	3	3	3	1.9	1.9	1.9	3	4.9	4.9	4.9	1.9	1.9	1.9	4.9
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	460	460	460	208/230	208/230	208/230	208/230	460	460	460	208/230
	Phase	1	3	3	1	3	3	1	1	3	3	1	3	3	1
	HP	3/4	1/2	3/4	3/4	1/2	3/4	3/4	1	3/4	1	1	3/4	1	1
	Amps (FLA)	6	2.8	3.4	3.2	1.4	1.6	6	7.6	3.4	3.8	4	1.6	1.9	7.6
	Amps (LRA)	0	11.3	16.8	0	6.2	8.4	0	0	16.8	24	0	8.4	12	0

INDOOR AIRFLOW PERFORMANCE FOR 3-5 TON SELF-CONTAINED AIR CONDITIONERS—RLNL DIRECT DRIVE

DIRECT-DRIVE BLOWER 208 AIRFLOW PERFORMANCE

Unit Model	Motor Speed From Factory		Heating Input BTU/hr [kW]	Manufacturer Recommended Air-Flow Range (Min / Max) CFM	Blower Size/ Motor HP # of Speeds	Motor Speed	CFM Air Delivery/RPM/Watts-208 VOLTS										
	Cool	Heat					External Static Pressure-Inches W.C.										
							0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80			
RLNL-A036	Low	Low	[06]	1050 / 1350	10x10 1/2 3 Speed	Low	CFM	1210	1193	1175	1155	1125	1075	1015	925		
			Watts				450	400	385	380	375	370	360				
			CFM				1515	1500	1475	1450	1405	1350	1275	1180			
			Watts				525	515	510	505	490	475	460	445			
			CFM				1680	1650	1625	1580	1530	1460	1390	1280			
RLNL-A042	Med	Med	[06]	1225 / 1575	10x10 1/2 3 Speed	Low	CFM	1210	1193	1175	1155	1125	1075	1015	925		
			Watts				450	400	385	380	375	370	360				
			CFM				1515	1500	1475	1450	1405	1350	1275	1180			
			Watts				525	515	510	505	490	475	460	445			
			CFM				1680	1650	1625	1580	1530	1460	1390	1280			
RLNL-A048	Med	Med	[06]	1400 / 1800	10x10 1/2 3 Speed	Low	CFM	1210	1193	1175	1155	1125	1075	1015	925		
			Watts				450	400	385	380	375	370	360				
			CFM				1515	1500	1475	1450	1405	1350	1275	1180			
			Watts				525	515	510	505	490	475	460	445			
			CFM				1680	1650	1625	1580	1530	1460	1390	1280			
RLNL-A060	Med	Med	[06]	1750 / 2250	10x10 1 3 Speed (X-13)	Low	CFM	1575	1536	1496	1457	1417	1377	1338	1298		
			Watts				297	314	330	347	364	381	397	414			
			CFM				1985	1954	1919	1876	1824	1759	1679	1581			
			Watts				535	553	574	593	606	609	599	572			
			CFM				2431	2372	2306	2228	2138	2032	1907	1762			
			[10]				Watts	970	981	964	926	872	806	736	665		
			[15]														
			[20]														

INDOOR AIRFLOW PERFORMANCE FOR 3-5 TON SELF-CONTAINED AIR CONDITIONERS—RLNL DIRECT DRIVE

DIRECT-DRIVE 230/460 AIRFLOW PERFORMANCE

Unit Model	Motor Speed From Factory		Heating Input BTU/hr [kW]	Manufacturer Recommended Air-Flow Range (Min / Max) CFM	Blower Size/ Motor HP # of Speeds	Motor Speed	CFM Air Delivery/RPM/Watts-230/460 VOLTS									
	Cool	Heat					External Static Pressure-Inches W.C.									
							0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80		
RLNL-A036	Low	Low	[06]	1050 / 1350	10x10 1/2 3 Speed	Low	CFM	1400	1375	1360	1335	1305	1255	1210	1100	
			Watts				470	460	455	450	440	435	425	410		
			CFM				1685	1620	1580	1550	1500	1430	1350	1230		
			Watts				635	600	580	570	550	535	505	475		
RLNL-A042	Med	Med	[06]	1225 / 1575	10x10 1/2 3 Speed	High	CFM	1870	1830	1790	1730	1660	1580	1500	1375	
			Watts				780	760	740	700	660	635	600	555		
			CFM				1400	1375	1360	1335	1305	1255	1210	1100		
			Watts				470	460	455	450	440	435	425	410		
RLNL-A048	Med	Med	[06]	1400 / 1800	10x10 1/2 3 Speed	Low	CFM	1870	1830	1790	1730	1660	1580	1500	1375	
			Watts				780	760	740	700	660	635	600	555		
			CFM				1400	1375	1360	1335	1305	1255	1210	1100		
			Watts				470	460	455	450	440	435	425	410		
RLNL-A060	Med	Med	[06]	1750 / 2250	10x10 1 3 Speed (X-13)	High	CFM	1870	1830	1790	1730	1660	1580	1500	1375	
			Watts				780	760	740	700	660	635	600	555		
			CFM				1575	1536	1496	1457	1417	1377	1338	1298		
			Watts				297	314	330	347	364	381	397	414		
			[10]				CFM	1985	1954	1919	1876	1824	1759	1679	1581	
			[12]				Watts	535	553	574	593	606	609	599	572	
			[15]				CFM	2431	2372	2306	2228	2138	2032	1907	1762	
			[20]				Watts	970	981	964	926	872	806	736	665	

INDOOR AIRFLOW PERFORMANCE FOR 3-5 TON SELF-CONTAINED AIR CONDITIONERS—RLPL DIRECT DRIVE

Unit Model Cooling Capacity Tons [kW]	Motor Speed From Factory		Heating Input BTU/hr [kW]	Manufacturer Recommended Air-Flow Range (Min / Max) CFM	Blower Size/ Motor HP # of Speeds	Motor Speed	CFM Air Delivery/RPM/Watts-230/460 Volts									
							External Static Pressure-Inches W.C.									
							0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80		
RLPL-A036 3.0 [10.55]	Cool	Low (Tap 2)	[06]	1050 / 1350	10x10 1/2 HP [249 W] 3 Speed (X-13 Motor)	Low (Tap 2)	CFM	1381	1339	1291	1236	1193	1144	1079	1004	
			RPM				675	717	766	808	855	903	961	1016		
			Watts				200	214	225	233	248	262	275	289		
	Low (Tap 2)	[10]	CFM				1479	1432	1385	1346	1304	1256	1201	1137		
		[12]	RPM				706	751	795	835	874	919	970	1024		
		[15]	Watts				242	254	266	282	291	306	319	336		
[20]	CFM	1669	1626	1585	1544	1500	1460	1418	1376							
RLPL-A042 3.5 [12.31]	Cool	Med (Tap 2)	[06]	1225 / 1575	10x10 3/4 HP [559 W] 4 Speed (X-13 Motor)	Med (Tap 2)	CFM	1444	1396	1347	1306	1265	1225	1185	1108	
			RPM				681	731	780	827	873	920	966	1038		
			Watts				208	223	237	253	268	281	293	317		
	Med (Tap 2)	[10]	CFM				1643	1605	1567	1523	1479	1441	1403	1365		
		[12]	RPM				768	805	842	887	932	971	1009	1048		
		[15]	Watts				304	319	333	350	366	381	395	410		
[20]	CFM	1643	1605	1567	1523	1479	1441	1403	1365							
RLPL-A048 4.0 [14.07]	Cool	Med (Tap 2)	[06]	1400 / 1800	10x10 3/4 HP [559 W] 4 Speed (X-13 Motor)	Med (Tap 2)	CFM	1457	1410	1363	1322	1280	1235	1190	1106	
			RPM				710	763	816	858	900	951	1002	1061		
			Watts				229	241	252	267	282	299	315	330		
	Med (Tap 2)	[10]	CFM				1717	1676	1635	1596	1556	1514	1471	1425		
		[12]	RPM				817	854	890	931	971	1012	1052	1092		
		[15]	Watts				360	374	387	402	417	433	449	461		
[20]	CFM	1875	1837	1799	1759	1714	1674	1633	1548							
RLPL-A060 5.0 [17.59]	Cool	Med (Tap 2)	[06]	1750 / 2250	10x10 1 HP [746 W] 3 Speed (X-13 Motor)	Med (Tap 2)	CFM	1575	1536	1496	1457	1417	1377	1338	1298	
			RPM				741	783	824	866	907	949	990	1032		
			Watts				297	314	330	347	364	381	397	414		
	Med (Tap 2)	[10]	CFM				1985	1954	1919	1876	1824	1759	1679	1581		
		[12]	RPM				902	942	979	1013	1040	1071	1096	1119		
		[15]	Watts				535	553	574	593	606	609	599	572		
[20]	CFM	2431	2372	2306	2228	2138	2032	1907	1762							
CFM	1076	1089	1102	1114	1125	1133	1142	1151								
Watts	970	981	964	926	872	806	736	665								

INDOOR AIRFLOW PERFORMANCE FOR 3-5 TON SELF-CONTAINED AIR CONDITIONERS DIRECT DRIVE / BELT DRIVE

BELT-DRIVE AIRFLOW PERFORMANCE-RLN/RLPL

AIR FLOW CFM	CAPACITY 3 & 3.5 TON PACKAGED AIR CONDITIONER (13 & 14 SEER) VOLTAGE 208-230, 460 - 3 PHASE																		AIR FLOW CFM													
	0.1		0.2		0.3		0.4		0.5		0.6		0.7		0.8		0.9			1.0		1.1		1.2		1.3		1.4		1.5		
	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS		RPM	WATTS											
900	-	-	-	665	290	730	300	780	315	830	330	360	920	375	960	390	410	1040	445	1080	470	1100	500	1160	530	1230	560	1250	590	1265	610	1000
1000	-	-	-	625	275	680	295	750	310	805	325	850	345	895	375	935	390	1015	435	1065	465	1100	500	1160	530	1230	560	1250	590	1265	610	1000
1100	-	-	-	640	300	710	315	780	325	830	340	875	365	915	380	955	405	990	430	1040	450	1080	485	1115	540	1180	570	1200	600	1270	630	1100
1200	-	-	-	670	315	735	330	800	345	850	365	895	385	935	410	975	430	1010	450	1060	475	1100	520	1145	560	1200	600	1250	630	1285	660	1200
1300	625	315	700	330	770	350	830	370	875	400	915	415	955	440	990	450	1040	495	1085	530	1125	565	1165	590	1220	645	1280	675	1305	710	1300	
1400	655	340	730	365	795	385	850	400	890	430	935	445	975	470	1010	500	1040	545	1090	590	1135	630	1180	660	1220	720	1285	755	1310	760	1400	
1500	685	380	755	390	825	415	870	435	915	450	955	480	1005	550	1040	545	1075	605	1110	640	1160	680	1200	730	1245	780	1295	815	1325	820	1500	
1600	730	420	790	435	850	455	890	490	935	505	970	525	1005	550	1040	630	1100	685	1135	710	1185	750	1225	800	1265	830	1295	875	1350	910	1600	
1700	755	465	825	475	875	505	915	955	550	985	570	1040	630	1100	685	1125	740	1165	770	1210	830	1245	870	1290	910	1310	930	1350	910	1700		
1800	790	500	850	530	890	550	935	570	975	600	1020	650	1080	690	1125	740	1165	770	1210	830	1245	870	1290	910	1310	930	1350	910	1800			

NOTE: Bold lines separate L, M and N drives respectively.

DRIVE PACKAGE	L						M						N (FIELD-SUPPLIED)																	
MOTOR H.P.	1/2 (3/4 - 575V)						3/4						3/4																	
BLOWER SHEAVE	6.9 PITCH DIAMETER						6.4 PITCH DIAMETER						6.4 PITCH DIAMETER																	
MOTOR SHEAVE	ADJUSTABLE 2.4 - 3.4 PITCH DIAMETER						ADJUSTABLE 3.4 - 4.4 PITCH DIAMETER						ADJUSTABLE 4.0 - 5.0 PITCH DIAMETER																	
TURNS OPEN	0	1	2	3	4	5	6	0	1	2	3	4	5	6	0	1	2	3	4	5	6	0	1	2	3	4	5	6		
RPM	935	875	830	780	730	680	625	1295	1230	1185	1135	1085	1000	955	1095	1030	985	940	895	850	805	760	715	670	625	580	535	490	445	400

NOTE: Factory sheave settings are shown in bold print.

INDOOR AIRFLOW PERFORMANCE FOR 3-5 TON SELF-CONTAINED AIR CONDITIONERS BELT DRIVE

BELT-DRIVE AIRFLOW PERFORMANCE-RLNL/RLPL

AIR FLOW CFM	CAPACITY 4 TON PACKAGED AIR CONDITIONER (13 & 14 SEER)																																
	VOLTAGE 208-230, 460 - 3 PHASE																																
	0.1		0.2		0.3		0.4		0.5		0.6		0.7		0.8		0.9		1.0		1.1		1.2		1.3		1.4		1.5				
	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS			
1200	-	-	-	745	340	810	375	865	390	400	440	1000	440	1000	440	1040	460	1075	490	1115	540	1170	580	1215	620	1260	650	1300	685	1350			
1300	-	-	-	695	330	770	365	395	880	415	920	435	975	455	1010	470	1060	490	1100	530	1140	570	1190	600	1235	640	1270	685	1315	740	1300		
1400	-	-	-	725	350	795	395	855	420	895	435	945	455	995	470	1030	500	1070	520	1115	560	1160	600	1205	640	1250	685	1290	745	1335	810	1400	
1500	690	360	750	390	820	425	875	450	920	465	970	480	1010	500	1055	560	1100	580	1140	630	1180	660	1230	700	1270	760	1315	815	1350	865	1500		
1600	720	390	780	430	850	460	895	480	945	500	990	530	1035	565	1075	590	1115	635	1160	680	1205	725	1250	770	1290	830	1335	890	1365	935	1600		
1700	750	430	810	465	870	485	920	500	970	530	1015	570	1055	600	1090	645	1140	695	1180	735	1225	790	1270	845	1315	910	1350	960	-	-	1700		
1800	780	475	840	515	895	540	945	555	990	600	1035	625	1080	660	1115	710	1155	740	1205	800	1250	860	1295	930	1340	995	1385	1030	-	-	1800		
1900	820	520	870	560	925	580	970	600	1015	640	1060	680	1115	750	1145	790	1185	835	1225	880	1275	900	1315	1010	1355	1060	-	-	-	-	1900		
2000	850	585	900	610	950	630	1000	665	1045	715	1090	760	1130	810	1170	865	1205	900	1255	965	1300	1050	1340	1100	1365	1140	-	-	-	-	2000		

NOTE: Bold lines separate L, M and N drives respectively.

DRIVE PACKAGE	L		M		N (FIELD-SUPPLIED)									
MOTOR H.P.	1/2 (3/4 - 575V)		3/4		3/4									
BLOWER SHEAVE	6.9 PITCH DIAMETER		6.4 PITCH DIAMETER		6.4-PITCH DIAMETER									
MOTOR SHEAVE	ADJUSTABLE 2.8 - 3.8 PITCH DIAMETER		ADJUSTABLE 3.4 - 4.4 PITCH DIAMETER		ADJUSTABLE 4.0 - 5.0 PITCH DIAMETER									
TURNS OPEN	0	1	2	3	4	5	6							
RPM	990	945	895	850	800	750	695	1270	1225	1170	1115	1065	1015	965

NOTE: Factory sheave settings are shown in bold print.

BELT DRIVE AIRFLOW PERFORMANCE-RLNL

AIR FLOW CFM	CAPACITY 5 TON PACKAGED AIR CONDITIONER (13 SEER)																														
	VOLTAGE 208-230, 460 - 3 PHASE																														
	EXTERNAL STATIC PRESSURE-INCHES OF WATER																														
	0.1		0.2		0.3		0.4		0.5		0.6		0.7		0.8		0.9		1.0		1.1		1.2		1.3		1.4		1.5		
	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	RPM	WATTS	
1400	-	-	-	780	370	815	385	875	425	930	460	970	490	1030	540	1065	570	1105	595	1150	615	1195	645	1235	660	1280	705	1340	745	1400	
1500	-	-	-	795	405	840	415	895	440	945	500	995	540	1045	595	1080	615	1135	650	1165	675	1215	700	1255	735	1320	775	1355	805	1400	
1600	-	-	-	780	390	805	425	870	470	915	510	965	560	1015	600	1060	640	1105	680	1145	705	1180	730	1225	750	1270	790	1340	840	1365	880
1700	-	-	-	795	450	840	490	895	530	940	570	990	605	1035	640	1075	680	1120	725	1160	755	1200	790	1245	815	1300	855	1355	905	1375	940
1800	780	455	815	470	870	540	915	540	965	675	1010	660	1055	710	1100	760	1140	785	1175	810	1225	850	1260	880	1320	900	1365	985	1390	1020	1400
1900	800	485	850	530	895	590	945	640	995	675	1035	720	1070	775	1120	810	1160	850	1200	890	1245	915	1290	960	1335	1000	1375	1050	1405	1100	1400
2000	830	550	880	605	930	655	970	700	1015	730	1055	790	1105	830	1145	875	1180	910	1225	950	1260	980	1320	1035	1350	1075	1385	1120	-	-	-
2100	860	615	915	655	955	705	1005	760	1040	820	1090	870	1130	910	1170	950	1210	995	1250	1020	1290	1060	1335	1100	1370	1150	1400	1200	-	-	-
2200	895	680	945	735	995	780	1030	830	1060	880	1120	940	1155	980	1195	1020	1240	1055	1275	1100	1320	1140	1360	1180	1385	1225	-	-	-	-	-
2300	940	755	975	795	1015	830	1065	910	1100	965	1150	1025	1180	1050	1225	1095	1265	1125	1310	1175	1350	1230	1375	1260	1405	1320	-	-	-	-	-
2400	970	825	1015	880	1040	925	1100	1005	1145	1055	1175	1085	1225	1140	1260	1175	1300	1210	1340	1255	1370	1315	1400	1375	-	-	-	-	-	-	-

NOTE: L-drive left of bold line, M-drive right of bold line.

DRIVE PACKAGE	"L"		"M"											
MOTOR H.P.	3/4		1											
BLOWER SHEAVE	6.4 PITCH DIAMETER		6.4 PITCH DIAMETER											
MOTOR SHEAVE	2.8-3.8 PITCH DIAMETER - ADJ.		4.0 - 5.0											
TURNS OPEN	0	1	2	3	4	5	6							
RPM	1095	1040	995	940	890	835	780	1405	1360	1305	1250	1195	1145	1095

NOTE: Factory sheave settings are shown in bold print.

INDOOR AIRFLOW PERFORMANCE FOR 3-5 TON SELF-CONTAINED AIR CONDITIONERS—RLPL BELT DRIVE

AIRFLOW PERFORMANCE - 5 TON [17.6 kW] BELT DRIVE - RLPL

Air Flow CFM [L/s]		External Static Pressure — Inches of Water [kPa]																												
		Capacity 5 Ton [17.6kW] — 14 SEER Voltage 208/230-460 — 3 phase																												
		0.1 [0.02]	0.2 [0.05]	0.3 [0.07]	0.4 [0.10]	0.5 [0.12]	0.6 [0.15]	0.7 [0.17]	0.8 [0.20]	0.9 [0.22]	1.0 [0.25]	1.1 [0.27]	1.2 [0.30]	1.3 [0.32]	1.4 [0.35]	1.5 [0.37]														
RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W													
1400 [661]	—	—	—	794	395	835	433	877	467	918	499	962	528	1011	556	1085	610	1118	668	1152	723	1187	776	1220	827	1250	876			
1500 [708]	—	—	—	810	440	851	478	892	512	934	544	978	573	1026	601	1087	666	1120	724	1154	779	1189	832	1222	883	1252	932			
1600 [755]	—	—	—	826	489	871	527	913	562	954	593	998	623	1059	668	1090	729	1123	786	1158	842	1193	894	1226	945	1255	995			
1700 [802]	—	—	—	842	538	893	576	935	607	976	638	1020	657	1065	736	1096	797	1129	855	1164	910	1199	963	1232	1014	1262	1063			
1800 [849]	—	—	—	858	587	909	625	967	658	1008	689	1052	717	1097	796	1128	857	1161	919	1200	974	1211	1008	1241	1089	1271	1138			
1900 [897]	788	507	828	574	869	625	910	668	952	706	993	741	1035	772	1057	828	1087	892	1118	953	1151	1011	1186	1066	1221	1119	1254	1170	1283	1219
2000 [944]	817	578	857	644	898	695	939	739	981	777	1022	811	1044	848	1073	916	1103	980	1134	1041	1168	1099	1202	1154	1237	1207	1270	1268	1300	1307
2100 [991]	845	653	885	720	927	771	988	814	1009	852	1035	889	1064	943	1093	1011	1123	1075	1154	1136	1187	1194	1222	1249	1256	1302	1290	1353	—	—
2200 [1038]	873	734	913	801	955	852	996	1024	1049	1077	1103	1133	1163	1193	1223	1253	1283	1313	1343	1373	1403	1433	1463	1493	1523	1553	1583	1613	1643	1673
2300 [1085]	902	821	942	888	983	939	1024	983	1049	1081	1111	1153	1140	1222	1169	1286	1201	1347	1234	1404	1269	1459	—	—	—	—	—	—	—	—
2400 [1133]	933	914	973	961	1014	1032	1036	1028	1075	1116	1107	1196	1137	1270	1165	1338	1195	1402	1227	1463	—	—	—	—	—	—	—	—	—	—
2500 [1180]	970	1013	1010	1080	1035	1052	1062	1152	1101	1240	1133	1320	1163	1393	1191	1462	—	—	—	—	—	—	—	—	—	—	—	—	—	—

NOTE: L-Drive left of bold line, M-Drive right of bold line.

Drive Package	L	M
Motor H.P. [W]	¾ [559]	1 [746]
Blower Sheave	6.9" Pitch Diameter	6.9" Pitch Diameter
Motor Sheave	2.8"-3.8" Pitch Diameter - Adj.	4.0"-5.0" Pitch Diameter - Adj.
Turns Open	0 1 2 3 4 5	0 1 2 3 4 5
RPM	1007 963 922 880 833 785	1272 1242 1210 1172 1130 1089

NOTE: Factory sheave settings are shown in bold print.

[] Designates Metric Conversions

AUXILIARY HEATER KITS CHARACTERISTICS AND APPLICATION-RLNL

208-240 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION												
Model No. RLNL-	Single Power Supply For Both Unit And Heater Kit						Separate Power Supply For Unit And Heater Kit					
	RXJJ Heater Kit Nominal kW	Rated Heater kW @ 208/240 V	Heater KBTU/Hr @ 208/240 V	Heater Amp. @ 208/240 V	Unit Min. Ckt Ampacity @ 208/240V	Over Current Protective Device Size Min/Max @ 208 V / Min/Max @ 240 V	Heater Kit Min. Ckt. Ampacity 208/240 V	Heater Kit Max. Fuse Size 208/240 V	Air Conditioner Min. Ckt. Ampacity 208/240 V	Air Conditioner Over Current Protective Device Size Min/Max @ 208 V / Min/Max @ 240 V		
A036CK	No Heat	-	-	-	19/19	25/25	25/25	-	19/19	25/25	25/25	
	A06C+	4.2/5.6	14.33/19.10	11.7/13.5	20/22	25/25	25/25	15/17	-	-	-	
	A10C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/30	35/35	25/29	-	-	-	
	*A11C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/30	35/35	25/29	-	-	-	
	A12C+	8.4/11.2	28.66/38.21	23.4/27.0	35/39	35/35	40/40	30/34	-	-	-	
	A15C+	10.8/14.4	36.84/49.13	30.1/34.7	43/49	45/45	50/50	38/44	-	-	-	
A042CK	A20C+	14.4/19.2	49.13/65.50	40.1/46.2	56/63	60/60	70/70	51/58	-	-	-	
	*A21C+	14.4/19.2	49.13/65.50	40.1/46.2	56/63	60/60	70/70	51/58	-	-	-	
	No Heat	-	-	-	23/23	30/35	30/35	-	23/23	30/35	30/35	
	A06C+	4.2/5.6	14.33/19.10	11.7/13.5	23/23	30/35	30/35	15/17	-	-	-	
	A10C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/35	35/35	25/29	-	-	-	
	*A11C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/35	35/35	25/29	-	-	-	
A048CK	A12C+	8.4/11.2	28.66/38.21	23.4/27.0	35/39	35/35	40/40	30/34	-	-	-	
	A15C+	10.8/14.4	36.84/49.13	30.1/34.7	43/49	45/45	50/50	38/44	-	-	-	
	A20C+	14.4/19.2	49.13/65.50	40.1/46.2	56/63	60/60	70/70	51/58	-	-	-	
	*A21C+	14.4/19.2	49.13/65.50	40.1/46.2	56/63	60/60	70/70	51/58	-	-	-	
	No Heat	-	-	-	23/23	30/35	30/35	-	23/23	30/35	30/35	
	A06C+	4.2/5.6	14.33/19.10	11.7/13.5	23/23	30/35	30/35	15/17	-	-	-	
A060CK	A10C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/35	35/35	25/29	-	-	-	
	*A11C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/35	35/35	25/29	-	-	-	
	A12C+	8.4/11.2	28.66/38.21	23.4/27.0	35/39	35/35	40/40	30/34	-	-	-	
	A15C+	10.8/14.4	36.84/49.13	30.1/34.7	43/49	45/45	50/50	38/44	-	-	-	
	A20C+	14.4/19.2	49.13/65.50	40.1/46.2	56/63	60/60	70/70	51/58	-	-	-	
	*A21C+	14.4/19.2	49.13/65.50	40.1/46.2	56/63	60/60	70/70	51/58	-	-	-	

* = For Canadian use only. Uses "P" fuses for inductive circuit
 + = Field Installed Only

AUXILIARY HEATER KITS CHARACTERISTICS AND APPLICATION-RLNL

208-240 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION													
Separate Power Supply For Unit And Heater Kit													
Model No. RLNL-	RXJJ Heater Kit Nominal kW	Rated Heater kW @ 208/240 V	Heater KBTU/Hr @ 208/240 V	Heater Amp. @ 208/240 V	Unit Min. Ckt Ampacity @ 208/240V	Over Current Protective Device Size		Heater Kit Min. Ckt. Ampacity 208/240 V	Heater Kit Max. Fuse Size 208/240 V	Air Conditioner Min. Ckt. Ampacity 208/240 V	Air Conditioner Over Current Protective Device Size		
						Min/Max @ 208 V	Min/Max @ 240 V				Min/Max @ 208 V	Min/Max @ 240 V	
A036CL	No Heat	-	-	-	18/18	20/25	20/25	-	-	18/18	20/25	20/25	
	A06C+	4.2/5.6	14.33/19.10	11.7/13.5	19/21	20/25	25/25	15/17	15/20	-	-	-	
	A10C+	7.2/9.6	24.56/32.75	20.0/23.1	29/33	30/30	35/35	25/29	25/30	-	-	-	
	*A11C+	7.2/9.6	24.56/32.75	20.0/23.1	29/33	30/30	35/35	25/29	25/30	-	-	-	
	A12C+	8.4/11.2	28.66/38.21	23.4/27.0	33/38	35/35	40/40	30/34	30/35	-	-	-	
	A15C+	10.8/14.4	36.84/49.13	30.1/34.7	42/47	45/45	50/50	38/44	40/45	-	-	-	
A042CL	A20C+	14.4/19.2	49.13/65.50	40.1/46.2	54/62	60/60	70/70	51/58	60/60	-	-	-	
	*A21C+	14.4/19.2	49.13/65.50	40.1/46.2	54/62	60/60	70/70	51/58	60/60	-	-	-	
	No Heat	-	-	-	22/22	25/30	25/30	-	-	22/22	25/30	25/30	
	A06C+	4.2/5.6	14.33/19.10	11.7/13.5	22/22	25/30	25/30	15/17	15/20	-	-	-	
	A10C+	7.2/9.6	24.56/32.75	20.0/23.1	29/33	30/30	35/35	25/29	25/30	-	-	-	
	*A11C+	7.2/9.6	24.56/32.75	20.0/23.1	29/33	30/30	35/35	25/29	25/30	-	-	-	
A048CL	A12C+	8.4/11.2	28.66/38.21	23.4/27.0	33/38	35/35	40/40	30/34	30/35	-	-	-	
	A15C+	10.8/14.4	36.84/49.13	30.1/34.7	42/47	45/45	50/50	38/44	40/45	-	-	-	
	A20C+	14.4/19.2	49.13/65.50	40.1/46.2	54/62	60/60	70/70	51/58	60/60	-	-	-	
	*A21C+	14.4/19.2	49.13/65.50	40.1/46.2	54/62	60/60	70/70	51/58	60/60	-	-	-	
	No Heat	-	-	-	22/22	25/35	25/35	-	-	22/22	25/35	25/35	
	A06C+	4.2/5.6	14.33/19.10	11.7/13.5	22/22	25/35	25/35	15/17	15/20	-	-	-	
A060CL	A10C+	7.2/9.6	24.56/32.75	20.0/23.1	29/33	30/35	35/35	25/29	25/30	-	-	-	
	*A11C+	7.2/9.6	24.56/32.75	20.0/23.1	29/33	30/35	35/35	25/29	25/30	-	-	-	
	A12C+	8.4/11.2	28.66/38.21	23.4/27.0	33/38	35/35	40/40	30/34	30/35	-	-	-	
	A15C+	10.8/14.4	36.84/49.13	30.1/34.7	42/47	45/45	50/50	38/44	40/45	-	-	-	
	A20C+	14.4/19.2	49.13/65.50	40.1/46.2	54/62	60/60	70/70	51/58	60/60	-	-	-	
	*A21C+	14.4/19.2	49.13/65.50	40.1/46.2	54/62	60/60	70/70	51/58	60/60	-	-	-	
A060CL	No Heat	-	-	-	26/26	30/40	30/40	-	-	26/26	30/40	30/40	
	A06C+	4.2/5.6	14.33/19.10	11.7/13.5	26/26	30/40	30/40	15/17	15/20	-	-	-	
	A10C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/40	35/40	25/29	25/30	-	-	-	
	*A11C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/40	35/40	25/29	25/30	-	-	-	
	A12C+	8.4/11.2	28.66/38.21	23.4/27.0	34/38	35/40	40/40	30/34	30/35	-	-	-	
	A15C+	10.8/14.4	36.84/49.13	30.1/34.7	42/48	45/45	50/50	38/44	40/45	-	-	-	
A060CL	A20C+	14.4/19.2	49.13/65.50	40.1/46.2	55/62	60/60	70/70	51/58	60/60	-	-	-	
	*A21C+	14.4/19.2	49.13/65.50	40.1/46.2	55/62	60/60	70/70	51/58	60/60	-	-	-	
	A24C+	18.0/24.0	61.41/81.88	50.1/57.8	67/77	70/70	80/80	63/73	70/80	-	-	-	

* = For Canadian use only. Uses "P" fuses for inductive circuit
 + = Field Installed Only

AUXILIARY HEATER KITS CHARACTERISTICS AND APPLICATION-RLNL

208-240 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION														
Model No. RLNL-	Single Power Supply For Both Unit And Heater Kit							Separate Power Supply For Unit And Heater Kit						
	RXJJ Heater Kit Nominal kW	Rated Heater kW @ 208/240 V	Heater KBTU/Hr @ 208/240 V	Heater Amp. @ 208/240 V	Unit Min. Ckt Ampacity @ 208/240V	Over Current Protective Device Size Min/Max @ 208 V	Over Current Protective Device Size Min/Max @ 240 V	Heater Kit Min. Ckt. Ampacity 208/240 V	Heater Kit Max. Fuse Size 208/240 V	Air Conditioner Min. Ckt. Ampacity 208/240 V	Air Conditioner Over Current Protective Device Size Min/Max @ 208 V	Air Conditioner Over Current Protective Device Size Min/Max @ 240 V		
A036CM	No Heat	-	-	-	18/18	25/25	25/25	-	-	18/18	25/25	25/25		
	A06C+	4.2/5.6	14.33/19.10	11.7/13.5	19/22	25/25	25/25	15/17	15/20	-	-	-		
	A10C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/30	35/35	25/29	25/30	-	-	-		
	*A11C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/30	35/35	25/29	25/30	-	-	-		
	A12C+	8.4/11.2	28.66/38.21	23.4/27.0	34/38	35/35	40/40	30/34	30/35	-	-	-		
	A15C+	10.8/14.4	36.84/49.13	30.1/34.7	42/48	45/45	50/50	38/44	40/45	-	-	-		
A042CM	A20C+	14.4/19.2	49.13/65.50	40.1/46.2	55/62	60/60	70/70	51/58	60/60	-	-	-		
	*A21C+	14.4/19.2	49.13/65.50	40.1/46.2	55/62	60/60	70/70	51/58	60/60	-	-	-		
	No Heat	-	-	-	22/22	30/35	30/35	-	-	22/22	30/35	30/35		
	A06C+	4.2/5.6	14.33/19.10	11.7/13.5	22/22	30/35	30/35	15/17	15/20	-	-	-		
	A10C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/35	35/35	25/29	25/30	-	-	-		
	*A11C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/35	35/35	25/29	25/30	-	-	-		
A048CM	A12C+	8.4/11.2	28.66/38.21	23.4/27.0	34/38	35/35	40/40	30/34	30/35	-	-	-		
	A15C+	10.8/14.4	36.84/49.13	30.1/34.7	42/48	45/45	50/50	38/44	40/45	-	-	-		
	A20C+	14.4/19.2	49.13/65.50	40.1/46.2	55/62	60/60	70/70	51/58	60/60	-	-	-		
	*A21C+	14.4/19.2	49.13/65.50	40.1/46.2	55/62	60/60	70/70	51/58	60/60	-	-	-		
	No Heat	-	-	-	23/23	30/35	30/35	-	-	23/23	30/35	30/35		
	A06C+	4.2/5.6	14.33/19.10	11.7/13.5	23/23	30/35	30/35	15/17	15/20	-	-	-		
A060CM	A10C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/35	35/35	25/29	25/30	-	-	-		
	*A11C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/35	35/35	25/29	25/30	-	-	-		
	A12C+	8.4/11.2	28.66/38.21	23.4/27.0	34/38	35/35	40/40	30/34	30/35	-	-	-		
	A15C+	10.8/14.4	36.84/49.13	30.1/34.7	42/48	45/45	50/50	38/44	40/45	-	-	-		
	A20C+	14.4/19.2	49.13/65.50	40.1/46.2	55/62	60/60	70/70	51/58	60/60	-	-	-		
	*A21C+	14.4/19.2	49.13/65.50	40.1/46.2	55/62	60/60	70/70	51/58	60/60	-	-	-		
A066CM	No Heat	-	-	-	26/26	30/40	30/40	-	-	26/26	30/40	30/40		
	A06C+	4.2/5.6	14.33/19.10	11.7/13.5	26/26	30/40	30/40	15/17	15/20	-	-	-		
	A10C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/40	35/40	25/29	25/30	-	-	-		
	*A11C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/40	35/40	25/29	25/30	-	-	-		
	A12C+	8.4/11.2	28.66/38.21	23.4/27.0	34/39	35/40	40/40	30/34	30/35	-	-	-		
	A15C	10.8/14.4	36.84/49.13	30.1/34.7	43/49	45/45	50/50	38/44	40/45	-	-	-		
A066CM	A20C+	14.4/19.2	49.13/65.50	40.1/46.2	55/63	60/60	70/70	51/58	60/60	-	-	-		
	*A21C+	14.4/19.2	49.13/65.50	40.1/46.2	55/63	60/60	70/70	51/58	60/60	-	-	-		
	A24C+	18.0/24.0	61.41/81.88	50.1/57.8	68/77	70/70	80/80	63/73	70/80	-	-	-		

* = For Canadian use only. Uses "P" fuses for inductive circuit
 + = Field Installed Only

AUXILIARY HEATER KITS CHARACTERISTICS AND APPLICATION-RLNL

460 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION												
Model No. RLNL-	Single Power Supply For Both Unit And Heater Kit						Separate Power Supply For Unit And Heater Kit					
	RXJJ Heater Kit Nominal kW	Rated Heater kW @ 480 V	Heater KBTU/Hr @ 480 V	Heater Amp. @ 480 V	Unit Min. Ckt Ampacity @ 480 V	Over Current Protective Device Size		Heater Kit Min. Ckt. Ampacity 480 V	Heater Kit Max. Fuse Size 480 V	Air Conditioner Min. Ckt. Ampacity 480 V	Air Conditioner Over Current Protective Device Size	
						Min/Max @ 480 V	Min/Max @ 480 V				Min/Max @ 480 V	Min/Max @ 480 V
A036DK	No Heat	-	-	-	11	15/15	-	-	-	11	15/15	-
	A06D+	5.6	19.10	6.7	11	15/15	-	9	15	-	-	-
	A10D+	9.6	32.75	11.6	17	20/20	-	15	15	-	-	-
	*A11D+	9.6	32.75	11.6	17	20/20	-	15	15	-	-	-
	A12D+	11.2	38.21	13.5	20	20/20	-	17	20	-	-	-
	A15D+	14.4	49.13	17.3	25	25/25	-	22	25	-	-	-
	A20D+	19.2	65.50	23.1	32	35/35	-	29	30	-	-	-
*A21D+	19.2	65.50	23.1	32	35/35	-	29	30	-	-	-	
A042DK	No Heat	-	-	-	11	15/15	-	-	-	11	15/15	-
	A06D+	5.6	19.10	6.7	11	15/15	-	9	15	-	-	-
	A10D+	9.6	32.75	11.6	17	20/20	-	15	15	-	-	-
	*A11D+	9.6	32.75	11.6	17	20/20	-	15	15	-	-	-
	A12D+	11.2	38.21	13.5	20	20/20	-	17	20	-	-	-
	A15D+	14.4	49.13	17.3	25	25/25	-	22	25	-	-	-
	A20D+	19.2	65.50	23.1	32	35/35	-	29	30	-	-	-
*A21D+	19.2	65.50	23.1	32	35/35	-	29	30	-	-	-	
A048DK	No Heat	-	-	-	11	15/15	-	-	-	11	15/15	-
	A06D+	5.6	19.10	6.7	11	15/15	-	9	15	-	-	-
	A10D+	9.6	32.75	11.6	17	20/20	-	15	15	-	-	-
	*A11D+	9.6	32.75	11.6	17	20/20	-	15	15	-	-	-
	A12D+	11.2	38.21	13.5	20	20/20	-	17	20	-	-	-
	A15D+	14.4	49.13	17.3	25	25/25	-	22	25	-	-	-
	A20D+	19.2	65.50	23.1	32	35/35	-	29	30	-	-	-
*A21D+	19.2	65.50	23.1	32	35/35	-	29	30	-	-	-	
A060DK	No Heat	-	-	-	15	20/20	-	-	-	15	20/20	-
	A06D+	5.6	19.10	6.7	15	20/20	-	9	15	-	-	-
	A10D+	9.6	32.75	11.6	20	20/20	-	15	15	-	-	-
	*A11D+	9.6	32.75	11.6	20	20/20	-	15	15	-	-	-
	A12D+	11.2	38.21	13.5	22	25/25	-	17	20	-	-	-
	A15D+	14.4	49.13	17.4	27	30/30	-	22	25	-	-	-
	A20D+	19.2	65.50	23.3	35	35/35	-	29	30	-	-	-
*A21D+	19.2	65.50	23.3	35	35/35	-	29	30	-	-	-	
A24D+	No Heat	24.0	81.88	28.9	42	45/45	-	37	40	-	-	-

* = For Canadian use only. Uses "P" fuses for inductive circuit
 + = Field Installed Only

AUXILIARY HEATER KITS CHARACTERISTICS AND APPLICATION-RLNL

460 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION												
Model No. RLNL-	Single Power Supply For Both Unit And Heater Kit						Separate Power Supply For Unit And Heater Kit					
	RXJJ Heater Kit Nominal kW	Rated Heater kW @ 480 V	Heater KBTU/Hr @ 480 V	Heater Amp. @ 480 V	Unit Min. Ckt Ampacity @ 480 V	Over Current Protective Device Size		Heater Kit Min. Ckt. Ampacity 480 V	Heater Kit Max. Fuse Size 480 V	Air Conditioner Min. Ckt. Ampacity 480 V	Air Conditioner Over Current Protective Device Size	
						Min/Max @ 480 V	Min/Max @ 480 V				Min/Max @ 480 V	Min/Max @ 480 V
A036DL	No Heat	-	-	-	-	10	15/15	-	-	10	15/15	-
	A06D+	5.6	19.10	6.7	6.7	11	15/15	-	9	15	-	-
	A10D+	9.6	32.75	11.6	11.6	17	20/20	-	15	15	-	-
	*A11D+	9.6	32.75	11.6	11.6	17	20/20	-	15	15	-	-
	A12D+	11.2	38.21	13.5	13.5	19	20/20	-	17	20	-	-
	A15D+	14.4	49.13	17.3	17.3	24	25/25	-	22	25	-	-
A042DL	A20D+	19.2	65.50	23.1	23.1	31	35/35	-	29	30	-	-
	*A21D+	19.2	65.50	23.1	23.1	31	35/35	-	29	30	-	-
	No Heat	-	-	-	-	10	15/15	-	-	10	15/15	-
	A06D+	5.6	19.10	6.7	6.7	11	15/15	-	9	15	-	-
	A10D+	9.6	32.75	11.6	11.6	17	20/20	-	15	15	-	-
	*A11D+	9.6	32.75	11.6	11.6	17	20/20	-	15	15	-	-
A048DL	A12D+	11.2	38.21	13.5	13.5	19	20/20	-	17	20	-	-
	A15D+	14.4	49.13	17.3	17.3	24	25/25	-	22	25	-	-
	A20D+	19.2	65.50	23.1	23.1	31	35/35	-	29	30	-	-
	*A21D+	19.2	65.50	23.1	23.1	31	35/35	-	29	30	-	-
	No Heat	-	-	-	-	11	15/15	-	-	11	15/15	-
	A06D+	5.6	19.10	6.7	6.7	11	15/15	-	9	15	-	-
A060DL	A10D+	9.6	32.75	11.6	11.6	17	20/20	-	15	15	-	-
	*A11D+	9.6	32.75	11.6	11.6	17	20/20	-	15	15	-	-
	A12D+	11.2	38.21	13.5	13.5	19	20/20	-	17	20	-	-
	A15D+	14.4	49.13	17.3	17.3	24	25/25	-	22	25	-	-
	A20D+	19.2	65.50	23.1	23.1	31	35/35	-	29	30	-	-
	*A21D+	19.2	65.50	23.1	23.1	31	35/35	-	29	30	-	-
A060DL	No Heat	-	-	-	-	13	15/20	-	-	13	15/20	-
	A06D+	5.6	19.10	6.7	6.7	13	15/20	-	9	15	-	-
	A10D+	9.6	32.75	11.6	11.6	17	20/20	-	15	15	-	-
	*A11D+	9.6	32.75	11.6	11.6	17	20/20	-	15	15	-	-
	A12D+	11.2	38.21	13.5	13.5	19	20/20	-	17	20	-	-
	A15D+	14.4	49.13	17.3	17.3	24	25/25	-	22	25	-	-
A060DL	A20D+	19.2	65.50	23.1	23.1	31	35/35	-	29	30	-	-
	*A21D+	19.2	65.50	23.1	23.1	31	35/35	-	29	30	-	-
	No Heat	-	-	-	-	39	40/40	-	-	37	40	-
	A06D+	5.6	19.10	6.7	6.7	11	15/15	-	9	15	-	-
	A10D+	9.6	32.75	11.6	11.6	17	20/20	-	15	15	-	-
	*A11D+	9.6	32.75	11.6	11.6	17	20/20	-	15	15	-	-

* = For Canadian use only. Uses "P" fuses for inductive circuit
 + = Field Installed Only

AUXILIARY HEATER KITS CHARACTERISTICS AND APPLICATION-RLNL

460 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION												
Single Power Supply For Both Unit And Heater Kit						Separate Power Supply For Unit And Heater Kit						
Model No. RLNL-	RXJJ Heater Kit Nominal kW	Rated Heater kW @ 208-480 V	Heater KBTU/Hr @ 480 V	Heater Amp. @ 480 V	Unit Min. Ckt Ampacity @ 480 V	Over Current Protective Device Size		Heater Kit Min. Ckt. Ampacity 480 V	Heater Kit Max. Fuse Size 480 V	Air Conditioner Min. Circuit Ampacity 480 V	Air Conditioner Over Current Protective Device Size	
						Min/Max @ 480 V	Min/Max @ 480 V				Min/Max @ 480 V	Min/Max @ 480 V
A036DM	No Heat	-	-	-	10	15/15	15/15	-	-	10	15/15	-
	A06D+	5.6	19.10	6.7	11	15/15	15/15	9	15	-	-	-
	A10D+	9.6	32.75	11.6	17	20/20	20/20	15	15	-	-	-
	*A11D+	9.6	32.75	11.6	17	20/20	20/20	15	15	-	-	-
	A12D+	11.2	38.21	13.5	19	20/20	20/20	17	20	-	-	-
	A15D+	14.4	49.13	17.3	24	25/25	25/25	22	25	-	-	-
A042DM	A20D+	19.2	65.50	23.1	31	35/35	35/35	29	30	-	-	-
	*A21D+	19.2	65.50	23.1	31	35/35	35/35	29	30	-	-	-
	No Heat	-	-	-	11	15/15	15/15	-	-	11	15/15	-
	A06D+	5.6	19.10	6.7	11	15/15	15/15	9	15	-	-	-
	A10D+	9.6	32.75	11.6	17	20/20	20/20	15	15	-	-	-
	*A11D+	9.6	32.75	11.6	17	20/20	20/20	15	15	-	-	-
A048DM	A12D+	11.2	38.21	13.5	19	20/20	20/20	17	20	-	-	-
	A15D+	14.4	49.13	17.3	24	25/25	25/25	22	25	-	-	-
	A20D+	19.2	65.50	23.1	31	35/35	35/35	29	30	-	-	-
	*A21D+	19.2	65.50	23.1	31	35/35	35/35	29	30	-	-	-
	No Heat	-	-	-	11	15/15	15/15	-	-	11	15/15	-
	A06D+	5.6	19.10	6.7	11	15/15	15/15	9	15	-	-	-
A060DM	A10D+	9.6	32.75	11.6	17	20/20	20/20	15	15	-	-	-
	*A11D+	9.6	32.75	11.6	17	20/20	20/20	15	15	-	-	-
	A12D+	11.2	38.21	13.5	19	20/20	20/20	17	20	-	-	-
	A15D+	14.4	49.13	17.3	24	25/25	25/25	22	25	-	-	-
	A20D+	19.2	65.50	23.1	31	35/35	35/35	29	30	-	-	-
	*A21D+	19.2	65.50	23.1	31	35/35	35/35	29	30	-	-	-
A066DM	No Heat	-	-	-	13	15/20	15/20	-	-	13	15/20	-
	A06D+	5.6	19.10	6.7	13	15/20	15/20	9	15	-	-	-
	A10D+	9.6	32.75	11.6	17	20/20	20/20	15	15	-	-	-
	*A11D+	9.6	32.75	11.6	17	20/20	20/20	15	15	-	-	-
	A12D+	11.2	38.21	13.5	20	20/20	20/20	17	20	-	-	-
	A15D+	14.4	49.13	17.3	24	25/25	25/25	22	25	-	-	-
A072DM	A20D+	19.2	65.50	23.1	32	35/35	35/35	29	30	-	-	-
	*A21D+	19.2	65.50	23.1	32	35/35	35/35	29	30	-	-	-
	A24D+	24.0	81.88	28.9	39	40/40	40/40	37	40	-	-	-

* = For Canadian use only. Uses "P" fuses for inductive circuit
 + = Field Installed Only

AUXILIARY HEATER KITS CHARACTERISTICS AND APPLICATION-RLNL

208-240 VOLT, SINGLE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION												
Model No. RLNL-	Single Power Supply For Both Unit And Heater Kit						Separate Power Supply For Unit And Heater Kit					
	RXJJ Heater Kit Nominal kW	Rated Heater kW @ 208/240 V	Heater KBTU/Hr @ 208/240 V	Heater Amp. @ 208/240 V	Unit Min. Ckt Ampacity @ 208/240V	Over Current Protective Device Size Min/Max @ 208 V	Heater Kit Min. Ckt. Ampacity 208/240 V	Heater Kit Max. Fuse Size 208/240 V	Air Conditioner Min. Ckt. Ampacity 208/240 V	Air Conditioner Over Current Protective Device Size Min/Max @ 208 V	Model No. RLNL-	
A036JK	No Heat	-	-	-	-	27/27	35/40	-	-	27/27	35/40	35/40
	A06J+	4.2/5.6	14.33/19.10	20.2/23.3	31/35	31/35	35/40	30/30	-	-	-	-
	A10J+	7.2/9.6	24.56/32.75	34.7/40.0	49/55	49/55	50/50	45/50	-	-	-	-
	*A11J+	7.2/9.6	24.56/32.75	34.7/40.0	49/55	49/55	50/50	45/50	-	-	-	-
	A12J+	8.4/11.2	28.66/38.21	40.4/46.7	56/64	56/64	60/60	60/60	-	-	-	-
	A15J+	10.8/14.4	36.84/49.13	52.0/60.0	70/80	70/80	70/70	80/80	-	-	-	-
	A20J+	14.4/19.2	49.13/65.50	69.3/80.0	92/105	92/105	100/100	110/110	-	-	-	-
*A21J+	14.4/19.2	49.13/65.50	69.3/80.0	92/105	92/105	100/100	110/110	-	-	-	-	
A042JK	No Heat	-	-	-	-	28/28	35/45	-	-	28/28	35/45	35/45
	A06J+	4.2/5.6	14.33/19.10	20.2/23.3	31/35	31/35	35/45	30/30	-	-	-	-
	A10J	7.2/9.6	24.56/32.75	34.7/40.0	49/55	49/55	50/50	45/50	-	-	-	-
	*A11J+	7.2/9.6	24.56/32.75	34.7/40.0	49/55	49/55	50/50	45/50	-	-	-	-
	A12J+	8.4/11.2	28.66/38.21	40.4/46.7	56/64	56/64	60/60	70/70	-	-	-	-
	A15J	10.8/14.4	36.84/49.13	52.0/60.0	70/80	70/80	70/70	80/80	-	-	-	-
	A20J+	14.4/19.2	49.13/65.50	69.3/80.0	92/105	92/105	100/100	110/110	-	-	-	-
*A21J+	14.4/19.2	49.13/65.50	69.3/80.0	92/105	92/105	100/100	110/110	-	-	-	-	
A048JK	No Heat	-	-	-	-	33/33	40/50	-	-	33/33	40/50	40/50
	A06J+	4.2/5.6	14.33/19.10	20.2/23.3	33/35	33/35	40/50	30/30	-	-	-	-
	A10J+	7.2/9.6	24.56/32.75	34.7/40.0	49/55	49/55	50/50	45/50	-	-	-	-
	*A11J+	7.2/9.6	24.56/32.75	34.7/40.0	49/55	49/55	50/50	45/50	-	-	-	-
	A12J+	8.4/11.2	28.66/38.21	40.4/46.7	56/64	56/64	60/60	60/60	-	-	-	-
	A15J	10.8/14.4	36.84/49.13	52.0/60.0	70/80	70/80	70/70	80/80	-	-	-	-
	A20J	14.4/19.2	49.13/65.50	69.3/80.0	92/105	92/105	100/100	110/110	-	-	-	-
*A21J+	14.4/19.2	49.13/65.50	69.3/80.0	92/105	92/105	100/100	110/110	-	-	-	-	
A060JK	No Heat	-	-	-	-	43/43	50/60	-	-	43/43	50/60	50/60
	A06J+	4.2/5.6	14.33/19.10	20.2/23.3	43/43	43/43	50/60	30/30	-	-	-	-
	A10J+	7.2/9.6	24.56/32.75	34.7/40.0	53/60	53/60	60/60	45/50	-	-	-	-
	*A11J+	7.2/9.6	24.56/32.75	34.7/40.0	53/60	53/60	60/60	45/50	-	-	-	-
	A12J+	8.4/11.2	28.66/38.21	40.4/46.7	60/68	60/68	60/60	60/60	-	-	-	-
	A15J	10.8/14.4	36.84/49.13	52.0/60.0	75/85	75/85	80/80	90/90	-	-	-	-
	A20J	14.4/19.2	49.13/65.50	69.3/80.0	97/110	97/110	100/100	110/110	-	-	-	-
*A21J+	14.4/19.2	49.13/65.50	69.3/80.0	97/110	97/110	100/100	110/110	-	-	-	-	

* = For Canadian use only. Uses "P" fuses for inductive circuit
 + = Field Installed Only

AUXILIARY HEATER KITS CHARACTERISTICS AND APPLICATION-RLPL

208-240 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION												
Model No. RLPL-	Single Power Supply For Both Unit And Heater Kit						Separate Power Supply For Unit And Heater Kit					
	RXJJ Heater Kit Nominal kW	Rated Heater kW @ 208/240 V	Heater KBTU/Hr @ 208/240 V	Heater Amp. @ 208/240 V	Unit Min. Ckt Ampacity @ 208/240V	Over Current Protective Device Size		Heater Kit Min. Ckt. Ampacity 208/240 V	Heater Kit Max. Fuse Size 208/240 V	Air Conditioner Min. Ckt. Ampacity 208/240 V	Air Conditioner Over Current Protective Device Size	
						Min/Max @ 208 V	Min/Max @ 240 V				Min/Max @ 208 V	Min/Max @ 240 V
A036CK	No Heat	-/-	-/-	-/-	19/19	25/25	25/25	-	-	19/19	25/25	25/25
	A06C+	4.2/5.6	14.33/19.10	11.7/13.5	20/22	25/25	25/25	15/17	15/20	-	-	-
	A10C+	7.2/9.6	24.56/32.75	20.0/23.1	31/34	35/35	35/35	25/29	25/30	-	-	-
	*A11C+	7.2/9.6	24.56/32.75	20.0/23.1	31/34	35/35	35/35	25/29	25/30	-	-	-
	A12C+	8.4/11.2	28.66/38.21	23.4/27.0	35/39	40/40	40/40	30/34	30/35	-	-	-
	A15C+	10.8/14.4	36.84/49.13	30.1/34.7	43/49	45/45	50/50	38/44	40/45	-	-	-
A042CK	A20C+	14.4/19.2	49.13/65.50	40.1/46.2	56/63	60/60	70/70	51/58	60/60	-	-	-
	*A21C+	14.4/19.2	49.13/65.50	40.1/46.2	56/63	60/60	70/70	51/58	60/60	-	-	-
	No Heat	-/-	-/-	-/-	25/25	30/35	30/35	-	-	25/25	30/35	30/35
	A06C+	4.2/5.6	14.33/19.10	11.7/13.5	25/25	30/35	30/35	15/17	15/20	-	-	-
	A10C+	7.2/9.6	24.56/32.75	20.0/23.1	33/37	35/35	40/40	25/29	25/30	-	-	-
	*A11C+	7.2/9.6	24.56/32.75	20.0/23.1	33/37	35/35	40/40	25/29	25/30	-	-	-
A048CK	A12C+	8.4/11.2	28.66/38.21	23.4/27.0	37/42	40/40	45/45	30/34	30/35	-	-	-
	A15C+	10.8/14.4	36.84/49.13	30.1/34.7	46/51	50/50	60/60	38/44	40/45	-	-	-
	A20C+	14.4/19.2	49.13/65.50	40.1/46.2	58/66	60/60	70/70	51/58	60/60	-	-	-
	*A21C+	14.4/19.2	49.13/65.50	40.1/46.2	58/66	60/60	70/70	51/58	60/60	-	-	-
	No Heat	-/-	-/-	-/-	25/25	30/35	30/35	-	-	25/25	30/35	30/35
	A06C+	4.2/5.6	14.33/19.10	11.7/13.5	25/25	30/35	30/35	15/17	15/20	-	-	-
A060CK	A10C+	7.2/9.6	24.56/32.75	20.0/23.1	33/37	35/35	40/40	25/29	25/30	-	-	-
	*A11C+	7.2/9.6	24.56/32.75	20.0/23.1	33/37	35/35	40/40	25/29	25/30	-	-	-
	A12C+	8.4/11.2	28.66/38.21	23.4/27.0	39/44	40/45	45/45	30/34	30/35	-	-	-
	A15C+	10.8/14.4	36.84/49.13	30.1/34.7	48/53	50/50	60/60	38/44	40/45	-	-	-
	A20C+	14.4/19.2	49.13/65.50	40.1/46.2	60/68	60/60	70/70	51/58	60/60	-	-	-
	*A21C+	14.4/19.2	49.13/65.50	40.1/46.2	60/68	60/60	70/70	51/58	60/60	-	-	-

* = For Canadian use only. Uses "P" fuses for inductive circuit
 + = Field Installed Only

AUXILIARY HEATER KITS CHARACTERISTICS AND APPLICATION-RLPL

208-240 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION														
Model No. RLPL-	Single Power Supply For Both Unit And Heater Kit						Separate Power Supply For Unit And Heater Kit							
	RXJJ Heater Kit Nominal kW	Rated Heater kW @ 208/240 V	Heater KBTU/Hr @ 208/240 V	Heater Amp. @ 208/240 V	Unit Min. Ckt Ampacity @ 208/240V	Over Current Protective Device Size Min/Max @ 208 V @ Min/Max @ 240 V	Heater Kit Min. Ckt. Ampacity 208/240 V	Heater Kit Max. Fuse Size 208/240 V	Air Conditioner Min. Ckt. Ampacity 208/240 V	Air Conditioner Over Current Protective Device Size Min/Max @ 208 V @ Min/Max @ 240 V				
A036CL	No Heat	-/-	-/-	-/-	-/-	18/18	20/25	20/25	20/25	15/17	-	18/18	20/25	20/25
	A06C+	4.2/5.6	14.33/19.10	11.7/13.5	19/21	20/25	25/30	25/30	25/30	25/29	15/20	-	-	-
	A10C+	7.2/9.6	24.56/32.75	20.0/23.1	29/33	30/30	35/35	35/35	35/35	25/29	25/30	-	-	-
	*A11C+	7.2/9.6	24.56/32.75	20.0/23.1	29/33	30/30	35/35	35/35	35/35	25/29	25/30	-	-	-
	A12C+	8.4/11.2	28.66/38.21	23.4/27.0	33/38	35/35	40/40	40/40	40/40	30/34	30/35	-	-	-
	A15C+	10.8/14.4	36.84/49.13	30.1/34.7	42/47	45/45	50/50	50/50	50/50	38/44	40/45	-	-	-
	A20C+	14.4/19.2	49.13/65.50	40.1/46.2	54/62	60/60	70/70	70/70	70/70	51/58	60/60	-	-	-
	*A21C+	14.4/19.2	49.13/65.50	40.1/46.2	54/62	60/60	70/70	70/70	70/70	51/58	60/60	-	-	-
	No Heat	-/-	-/-	-/-	22/22	25/30	25/30	25/30	25/30	-	-	22/22	25/30	25/30
	A06C+	4.2/5.6	14.33/19.10	11.7/13.5	22/22	25/30	25/30	25/30	25/30	15/17	15/20	-	-	-
A042CL	A10C+	7.2/9.6	24.56/32.75	20.0/23.1	29/33	30/30	35/35	35/35	25/29	25/30	-	-	-	
	*A11C+	7.2/9.6	24.56/32.75	20.0/23.1	29/33	30/30	35/35	35/35	25/29	25/30	-	-	-	
	A12C+	8.4/11.2	28.66/38.21	23.4/27.0	33/38	35/35	40/40	40/40	30/34	30/35	-	-	-	
	A15C+	10.8/14.4	36.84/49.13	30.1/34.7	42/47	45/45	50/50	50/50	38/44	40/45	-	-	-	
	A20C+	14.4/19.2	49.13/65.50	40.1/46.2	54/62	60/60	70/70	70/70	51/58	60/60	-	-	-	
	*A21C+	14.4/19.2	49.13/65.50	40.1/46.2	54/62	60/60	70/70	70/70	51/58	60/60	-	-	-	
	No Heat	-/-	-/-	-/-	22/22	25/35	25/35	25/35	-	-	-	22/22	25/35	25/35
	A06C+	4.2/5.6	14.33/19.10	11.7/13.5	22/22	25/35	25/35	25/35	15/17	15/20	-	-	-	-
	A10C+	7.2/9.6	24.56/32.75	20.0/23.1	29/33	30/35	35/35	35/35	25/29	25/30	-	-	-	-
	*A11C+	7.2/9.6	24.56/32.75	20.0/23.1	29/33	30/35	35/35	35/35	25/29	25/30	-	-	-	-
A048CL	A12C+	8.4/11.2	28.66/38.21	23.4/27.0	33/38	35/35	40/40	40/40	30/34	30/35	-	-	-	
	A15C+	10.8/14.4	36.84/49.13	30.1/34.7	42/47	45/45	50/50	50/50	38/44	40/45	-	-	-	
	A20C+	14.4/19.2	49.13/65.50	40.1/46.2	54/62	60/60	70/70	70/70	51/58	60/60	-	-	-	
	*A21C+	14.4/19.2	49.13/65.50	40.1/46.2	54/62	60/60	70/70	70/70	51/58	60/60	-	-	-	
	No Heat	-/-	-/-	-/-	26/26	30/40	30/40	30/40	-	-	-	26/26	30/40	30/40
	A06C+	4.2/5.6	14.33/19.10	11.7/13.5	26/26	30/40	30/40	30/40	15/17	15/20	-	-	-	-
	A10C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/40	35/40	35/40	25/29	25/30	-	-	-	-
	*A11C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/40	35/40	35/40	25/29	25/30	-	-	-	-
	A12C+	8.4/11.2	28.66/38.21	23.4/27.0	34/38	35/40	40/40	40/40	30/34	30/35	-	-	-	-
	A15C+	10.8/14.4	36.84/49.13	30.1/34.7	42/48	45/45	50/50	50/50	38/44	40/45	-	-	-	-
A060CL	A20C+	14.4/19.2	49.13/65.50	40.1/46.2	55/62	60/60	70/70	70/70	51/58	60/60	-	-	-	-
	*A21C+	14.4/19.2	49.13/65.50	40.1/46.2	55/62	60/60	70/70	70/70	51/58	60/60	-	-	-	-
	A24C+	18.0/24.0	61.41/81.88	50.1/57.8	67/77	70/70	80/80	80/80	63/73	70/80	-	-	-	-

* = For Canadian use only. Uses "P" fuses for inductive circuit
 + = Field Installed Only

AUXILIARY HEATER KITS CHARACTERISTICS AND APPLICATION-RLPL

208-240 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION												
Model No. RLPL-	Single Power Supply For Both Unit And Heater Kit						Separate Power Supply For Unit And Heater Kit					
	RXJJ Heater Kit Nominal kW	Rated Heater kW @ 208/240 V	Heater KBTU/Hr @ 208/240 V	Heater Amp. @ 208/240 V	Unit Min. Ckt Ampacity @ 208/240V	Over Current Protective Device Size Min/Max @ 208 V	Heater Kit Min. Ckt. Ampacity 208/240 V	Heater Kit Max. Fuse Size 208/240 V	Air Conditioner Min. Ckt. Ampacity 208/240 V	Air Conditioner Over Current Protective Device Size Min/Max @ 208 V	Min/Max @ 208 V	Min/Max @ 240 V
A036CM	No Heat	-/-	-/-	-/-	-/-	18/18	25/25	25/25	18/18	-	25/25	25/25
	A06C+	4.2/5.6	14.33/19.10	11.7/13.5	19/22	25/25	25/25	15/17	-	15/20	-	-
	A10C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/30	35/35	25/29	-	25/30	-	-
	*A11C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/30	35/35	25/29	-	25/30	-	-
	A12C+	8.4/11.2	28.66/38.21	23.4/27.0	34/38	35/35	40/40	30/34	-	30/35	-	-
	A15C+	10.8/14.4	36.84/49.13	30.1/34.7	42/48	45/45	50/50	38/44	-	40/45	-	-
A042CM	A20C+	14.4/19.2	49.13/65.50	40.1/46.2	55/62	60/60	70/70	51/58	-	60/60	-	-
	*A21C+	14.4/19.2	49.13/65.50	40.1/46.2	55/62	60/60	70/70	51/58	-	60/60	-	-
	No Heat	-/-	-/-	v	22/22	30/35	30/35	-	22/22	-	30/35	30/35
	A06C+	4.2/5.6	14.33/19.10	11.7/13.5	22/22	30/35	30/35	15/17	-	15/20	-	-
	A10C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/35	35/35	25/29	-	25/30	-	-
	*A11C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/35	35/35	25/29	-	25/30	-	-
A048CM	A12C+	8.4/11.2	28.66/38.21	23.4/27.0	34/38	35/35	40/40	30/34	-	30/35	-	-
	A15C+	10.8/14.4	36.84/49.13	30.1/34.7	42/48	45/45	50/50	38/44	-	40/45	-	-
	A20C+	14.4/19.2	49.13/65.50	40.1/46.2	55/62	60/60	70/70	51/58	-	60/60	-	-
	*A21C+	14.4/19.2	49.13/65.50	40.1/46.2	55/62	60/60	70/70	51/58	-	60/60	-	-
	No Heat	-/-	-/-	-/-	23/23	30/35	30/35	-	23/23	-	30/35	30/35
	A06C+	4.2/5.6	14.33/19.10	11.7/13.5	23/23	30/35	30/35	15/17	-	15/20	-	-
A060CM	A10C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/35	35/35	25/29	-	25/30	-	-
	*A11C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/35	35/35	25/29	-	25/30	-	-
	A12C+	8.4/11.2	28.66/38.21	23.4/27.0	34/38	35/35	40/40	30/34	-	30/35	-	-
	A15C+	10.8/14.4	36.84/49.13	30.1/34.7	42/48	45/45	50/50	38/44	-	40/45	-	-
	A20C+	14.4/19.2	49.13/65.50	40.1/46.2	55/62	60/60	70/70	51/58	-	60/60	-	-
	*A21C+	14.4/19.2	49.13/65.50	40.1/46.2	55/62	60/60	70/70	51/58	-	60/60	-	-
A066CM	No Heat	-/-	-/-	-/-	26/26	30/40	30/40	-	26/26	-	30/40	30/40
	A06C+	4.2/5.6	14.33/19.10	11.7/13.5	26/26	30/40	30/40	15/17	-	15/20	-	-
	A10C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/40	35/40	25/29	-	25/30	-	-
	*A11C+	7.2/9.6	24.56/32.75	20.0/23.1	30/34	30/40	35/40	25/29	-	25/30	-	-
	A12C+	8.4/11.2	28.66/38.21	23.4/27.0	34/39	35/40	40/40	30/34	-	30/35	-	-
	A15C	10.8/14.4	36.84/49.13	30.1/34.7	43/49	45/45	50/50	38/44	-	40/45	-	-
A072CM	A20C+	14.4/19.2	49.13/65.50	40.1/46.2	55/63	60/60	70/70	51/58	-	60/60	-	-
	*A21C+	14.4/19.2	49.13/65.50	40.1/46.2	55/63	60/60	70/70	51/58	-	60/60	-	-
	No Heat	18.0/24.0	61.41/81.88	50.1/57.8	68/77	70/70	80/80	63/73	-	70/80	-	-

* = For Canadian use only. Uses "P" fuses for inductive circuit
+ = Field Installed Only

AUXILIARY HEATER KITS CHARACTERISTICS AND APPLICATION-RLPL

460 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION												
Model No. RLPL-	Single Power Supply For Both Unit And Heater Kit						Separate Power Supply For Unit And Heater Kit					
	RXJJ Heater Kit Nominal kW	Rated Heater kW @ 480 V	Heater KBTU/Hr @ 480 V	Heater Amp. @ 480 V	Unit Min. Ckt Ampacity @ 480 V	Over Current Protective Device Size		Heater Kit Min. Ckt. Ampacity 480 V	Heater Kit Max. Fuse Size 480 V	Air Conditioner Min. Ckt. Ampacity 480 V	Air Conditioner Over Current Protective Device Size	
						Min/Max @ 480 V	Min/Max @ 480 V				Min/Max @ 480 V	Min/Max @ 480 V
A036DK	No Heat	-	-	-	-	11	15/15	-	-	11	15/15	-
	A06D+	5.6	19.10	6.7	6.7	11	15/15	-	9	15	-	-
	A10D+	9.6	32.75	11.6	11.6	18	20/20	-	15	15	-	-
	*A11D+	9.6	32.75	11.6	11.6	18	20/20	-	15	15	-	-
	A12D+	11.2	38.21	13.5	13.5	20	20/20	-	17	20	-	-
	A15D+	14.4	49.13	17.4	17.4	25	25/25	-	22	25	-	-
A042DK	A20D+	19.2	65.50	23.3	23.3	32	35/35	-	30	30	-	-
	*A21D+	19.2	65.50	23.3	23.3	32	35/35	-	30	30	-	-
	No Heat	-	-	-	-	12	15/15	-	-	12	15/15	-
	A06D+	5.6	19.10	6.7	6.7	13	15/15	-	9	15	-	-
	A10D+	9.6	32.75	11.6	11.6	19	20/20	-	15	15	-	-
	*A11D+	9.6	32.75	11.6	11.6	19	20/20	-	15	15	-	-
A048DK	A12D+	11.2	38.21	13.5	13.5	21	25/25	-	17	20	-	-
	A15D+	14.4	49.13	17.4	17.4	26	30/30	-	22	25	-	-
	A20D+	19.2	65.50	23.3	23.3	34	35/35	-	30	30	-	-
	*A21D+	19.2	65.50	23.3	23.3	34	35/35	-	30	30	-	-
	No Heat	-	-	-	-	12	15/15	-	-	12	15/15	-
	A06D+	5.6	19.10	6.7	6.7	13	15/15	-	9	15	-	-
A060DK	A10D+	9.6	32.75	11.6	11.6	19	20/20	-	15	15	-	-
	*A11D+	9.6	32.75	11.6	11.6	19	20/20	-	15	15	-	-
	A12D+	11.2	38.21	13.5	13.5	21	25/25	-	17	20	-	-
	A15D+	14.4	49.13	17.4	17.4	26	30/30	-	22	25	-	-
	A20D+	19.2	65.50	23.3	23.3	34	35/35	-	30	30	-	-
	*A21D+	19.2	65.50	23.3	23.3	34	35/35	-	30	30	-	-
A060DK	No Heat	-	-	-	-	15	20/20	-	-	15	20/20	-
	A06D+	5.6	19.10	6.7	6.7	15	20/20	-	9	15	-	-
	A10D+	9.6	32.75	11.6	11.6	20	20/20	-	15	15	-	-
	*A11D+	9.6	32.75	11.6	11.6	20	20/20	-	15	15	-	-
	A12D+	11.2	38.21	13.5	13.5	22	25/25	-	17	20	-	-
	A15D+	14.4	49.13	17.4	17.4	27	30/30	-	22	25	-	-
A060DK	A20D+	19.2	65.50	23.3	23.3	35	35/35	-	30	30	-	-
	*A21D+	19.2	65.50	23.3	23.3	35	35/35	-	30	30	-	-
	A24D+	24.0	81.88	28.9	28.9	42	45/45	-	37	40	-	-

* = For Canadian use only. Uses "P" fuses for inductive circuit
 + = Field Installed Only

AUXILIARY HEATER KITS CHARACTERISTICS AND APPLICATION-RLPL

460 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION												
Model No. RLPL-	RXJJ Heater Kit Nominal kW	Rated Heater kW @ 480 V	Heater KBTU/Hr @ 480 V	Heater Amp. @ 480 V	Unit Min. Ckt Ampacity @ 480 V	Over Current Protective Device Size		Separate Power Supply For Unit And Heater Kit				
						Min/Max @ 480 V	Min/Max @ 480 V	Heater Kit Min. Ckt. Ampacity 480 V	Heater Kit Max. Fuse Size 480 V	Air Conditioner Min. Ckt. Ampacity 480 V	Air Conditioner Over Current Protective Device Size	
A036DL	No Heat	-	-	-	10	15/15	15/15	-	-	-	-	-
	A06D+	5.6	19.10	6.7	11	15/15	15/15	-	9	15	10	15/15
	A10D+	9.6	32.75	11.6	17	20/20	20/20	-	15	15	-	-
	*A11D+	9.6	32.75	11.6	17	20/20	20/20	-	15	15	-	-
	A12D+	11.2	38.21	13.5	19	20/20	20/20	-	17	20	-	-
	A15D+	14.4	49.13	17.3	24	25/25	25/25	-	22	25	-	-
	A20D+	19.2	65.50	23.1	31	35/35	35/35	-	29	30	-	-
*A21D+	19.2	65.50	23.1	31	35/35	35/35	-	29	30	-	-	
A042DL	No Heat	-	-	-	10	15/15	15/15	-	-	-	10	15/15
	A06D+	5.6	19.10	6.7	11	15/15	15/15	-	9	15	-	-
	A10D+	9.6	32.75	11.6	17	20/20	20/20	-	15	15	-	-
	*A11D+	9.6	32.75	11.6	17	20/20	20/20	-	15	15	-	-
	A12D+	11.2	38.21	13.5	19	20/20	20/20	-	17	20	-	-
	A15D+	14.4	49.13	17.3	24	25/25	25/25	-	22	25	-	-
	A20D+	19.2	65.50	23.1	31	35/35	35/35	-	29	30	-	-
*A21D+	19.2	65.50	23.1	31	35/35	35/35	-	29	30	-	-	
A048DL	No Heat	-	-	-	11	15/15	15/15	-	-	-	11	15/15
	A06D+	5.6	19.10	6.7	11	15/15	15/15	-	9	15	-	-
	A10D+	9.6	32.75	11.6	17	20/20	20/20	-	15	15	-	-
	*A11D+	9.6	32.75	11.6	17	20/20	20/20	-	15	15	-	-
	A12D+	11.2	38.21	13.5	19	20/20	20/20	-	17	20	-	-
	A15D+	14.4	49.13	17.3	24	25/25	25/25	-	22	25	-	-
	A20D+	19.2	65.50	23.1	31	35/35	35/35	-	29	30	-	-
*A21D+	19.2	65.50	23.1	31	35/35	35/35	-	29	30	-	-	
A060DL	No Heat	-	-	-	13	15/20	15/20	-	-	-	13	15/20
	A06D+	5.6	19.10	6.7	13	15/20	15/20	-	9	15	-	-
	A10D+	9.6	32.75	11.6	17	20/20	20/20	-	15	15	-	-
	*A11D+	9.6	32.75	11.6	17	20/20	20/20	-	15	15	-	-
	A12D+	11.2	38.21	13.5	19	20/20	20/20	-	17	20	-	-
	A15D+	14.4	49.13	17.3	24	25/25	25/25	-	22	25	-	-
	A20D+	19.2	65.50	23.1	31	35/35	35/35	-	29	30	-	-
*A21D+	19.2	65.50	23.1	31	35/35	35/35	-	29	30	-	-	
A24D+	24.0	81.88	28.9	39	40/40	40/40	-	37	40	-	-	

* = For Canadian use only. Uses "P" fuses for inductive circuit
 + = Field Installed Only

AUXILIARY HEATER KITS CHARACTERISTICS AND APPLICATION-RLPL

460 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION												
Model No. RLPL-	Single Power Supply For Both Unit And Heater Kit						Separate Power Supply For Unit And Heater Kit					
	RXJJ Heater Kit Nominal kW	Rated Heater kW @ 208-480 V	Heater KBTU/Hr @ 480 V	Heater Amp. @ 480 V	Unit Min. Ckt Ampacity @ 480 V	Over Current Protective Device Size		Heater Kit Min. Ckt. Ampacity 480 V	Heater Kit Min. Ckt. Ampacity 480 V	Air Conditioner Min. Ckt. Ampacity 480 V	Air Conditioner Over Current Protective Device Size	
						Min/Max @ 480 V	Min/Max @ 480 V				Min/Max @ 480 V	Min/Max @ 480 V
A036DM	No Heat	-	-	-	-	10	15/15	-	-	10	15/15	-
	A06D+	5.6	19.10	6.7	6.7	11	15/15	9	15	-	-	-
	A10D+	9.6	32.75	11.6	11.6	17	20/20	15	15	-	-	-
	*A11D+	9.6	32.75	11.6	11.6	17	20/20	15	15	-	-	-
	A12D+	11.2	38.21	13.5	13.5	19	20/20	17	20	-	-	-
	A15D+	14.4	49.13	17.3	17.3	24	25/25	22	25	-	-	-
A042DM	A20D+	19.2	65.50	23.1	23.1	31	35/35	29	30	-	-	-
	*A21D+	19.2	65.50	23.1	23.1	31	35/35	29	30	-	-	-
	No Heat	-	-	-	-	11	15/15	-	-	11	15/15	-
	A06D+	5.6	19.10	6.7	6.7	11	15/15	9	15	-	-	-
	A10D+	9.6	32.75	11.6	11.6	17	20/20	15	15	-	-	-
	*A11D+	9.6	32.75	11.6	11.6	17	20/20	15	15	-	-	-
A048DM	A12D+	11.2	38.21	13.5	13.5	19	20/20	17	20	-	-	-
	A15D+	14.4	49.13	17.3	17.3	24	25/25	22	25	-	-	-
	A20D+	19.2	65.50	23.1	23.1	31	35/35	29	30	-	-	-
	*A21D+	19.2	65.50	23.1	23.1	31	35/35	29	30	-	-	-
	No Heat	-	-	-	-	11	15/15	-	-	11	15/15	-
	A06D+	5.6	19.10	6.7	6.7	11	15/15	9	15	-	-	-
A060DM	A10D+	9.6	32.75	11.6	11.6	17	20/20	15	15	-	-	-
	*A11D+	9.6	32.75	11.6	11.6	17	20/20	15	15	-	-	-
	A12D+	11.2	38.21	13.5	13.5	19	20/20	17	20	-	-	-
	A15D+	14.4	49.13	17.3	17.3	24	25/25	22	25	-	-	-
	A20D+	19.2	65.50	23.1	23.1	31	35/35	29	30	-	-	-
	*A21D+	19.2	65.50	23.1	23.1	31	35/35	29	30	-	-	-
A060DM	No Heat	-	-	-	-	13	15/20	-	-	13	15/20	-
	A06D+	5.6	19.10	6.7	6.7	13	15/20	9	15	-	-	-
	A10D+	9.6	32.75	11.6	11.6	17	20/20	15	15	-	-	-
	*A11D+	9.6	32.75	11.6	11.6	17	20/20	15	15	-	-	-
	A12D+	11.2	38.21	13.5	13.5	20	20/20	17	20	-	-	-
	A15D+	14.4	49.13	17.3	17.3	24	25/25	22	25	-	-	-
A060DM	A20D+	19.2	65.50	23.1	23.1	32	35/35	29	30	-	-	-
	*A21D+	19.2	65.50	23.1	23.1	32	35/35	29	30	-	-	-
	A24D+	24.0	81.88	28.9	28.9	39	40/40	37	40	-	-	-

* = For Canadian use only. Uses "P" fuses for inductive circuit
 + = Field Installed Only

AUXILIARY HEATER KITS CHARACTERISTICS AND APPLICATION-RLPL

208-240 VOLT, SINGLE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION													
Model No. RLPL-	Single Power Supply For Both Unit And Heater Kit						Separate Power Supply For Unit And Heater Kit						
	RXJJ Heater Kit Nominal kW	Rated Heater kW @ 208/240 V	Heater KBTU/Hr @ 208/240 V	Heater Amp. @ 208/240 V	Unit Min. Ckt Ampacity @ 208/240V	Over Current Protective Device Size Min/Max @ 208 V	Heater Kit Min. Ckt. Ampacity 208/240 V	Heater Kit Max. Fuse Size 208/240 V	Air Conditioner Min. Ckt. Ampacity 208/240 V	Air Conditioner Over Current Protective Device Size Min/Max @ 208 V	Min/Max @ 208 V	Min/Max @ 240 V	
A036JK	No Heat	-/-	-/-	-/-	-/-	-/-	-/-	-/-	-/-	-/-	-/-	-/-	
	A06J+	4.2/5.6	14.33/19.10	20.2/23.3	31/35	35/40	35/40	30/30	27/27	35/40	35/40	35/40	
	A10J+	7.2/9.6	24.56/32.75	34.7/40.0	49/56	50/50	60/60	45/50	-	-	-	-	
	*A11J+	7.2/9.6	24.56/32.75	34.7/40.0	49/56	50/50	60/60	45/50	-	-	-	-	
	A12J+	8.4/11.2	28.66/38.21	40.4/46.7	56/64	60/60	70/70	60/60	-	-	-	-	
	A15J+	10.8/14.4	36.84/49.13	52.0/60.0	71/81	80/80	90/90	70/80	-	-	-	-	
	A20J+	14.4/19.2	49.13/65.50	69.3/80.0	92/106	100/100	110/110	90/100	-	-	-	-	
	*A21J+	14.4/19.2	49.13/65.50	69.3/80.0	92/106	100/100	110/110	90/100	-	-	-	-	
	No Heat	-/-	-/-	-/-	30/30	35/45	35/45	-	30/30	-	35/45	35/45	35/45
	A06J+	4.2/5.6	14.33/19.10	20.2/23.3	33/37	35/45	40/45	30/30	-	-	-	-	-
A042JK	A10J	7.2/9.6	24.56/32.75	34.7/40.0	51/58	60/60	60/60	45/50	-	-	-	-	
	*A11J+	7.2/9.6	24.56/32.75	34.7/40.0	51/58	60/60	60/60	45/50	-	-	-	-	
	A12J+	8.4/11.2	28.66/38.21	40.4/46.7	58/66	60/60	70/70	60/60	-	-	-	-	
	A15J	10.8/14.4	36.84/49.13	52.0/60.0	73/83	80/80	90/90	70/80	-	-	-	-	
	A20J+	14.4/19.2	49.13/65.50	69.3/80.0	95/108	100/100	110/110	90/100	-	-	-	-	
	*A21J+	14.4/19.2	49.13/65.50	69.3/80.0	95/108	100/100	110/110	90/100	-	-	-	-	
	No Heat	-/-	-/-	-/-	35/35	45/50	45/50	-	35/35	45/50	45/50	45/50	
	A06J+	4.2/5.6	14.33/19.10	20.2/23.3	35/37	45/50	45/50	30/30	-	-	-	-	
	A10J+	7.2/9.6	24.56/32.75	34.7/40.0	51/58	60/60	60/60	45/50	-	-	-	-	
	*A11J+	7.2/9.6	24.56/32.75	34.7/40.0	51/58	60/60	60/60	45/50	-	-	-	-	
A048JK	A12J+	8.4/11.2	28.66/38.21	40.4/46.7	58/66	60/60	70/70	60/60	-	-	-	-	
	A15J	10.8/14.4	36.84/49.13	52.0/60.0	73/83	80/80	90/90	70/80	-	-	-	-	
	A20J	14.4/19.2	49.13/65.50	69.3/80.0	95/108	100/100	110/110	90/100	-	-	-	-	
	*A21J+	14.4/19.2	49.13/65.50	69.3/80.0	95/108	100/100	110/110	90/100	-	-	-	-	
	No Heat	-/-	-/-	-/-	43/43	50/60	50/60	-	43/43	50/60	50/60	50/60	
	A06J+	4.2/5.6	14.33/19.10	20.2/23.3	43/43	50/60	50/60	30/30	-	-	-	-	
	A10J+	7.2/9.6	24.56/32.75	34.7/40.0	53/60	60/60	60/60	45/50	-	-	-	-	
	*A11J+	7.2/9.6	24.56/32.75	34.7/40.0	53/60	60/60	60/60	45/50	-	-	-	-	
	A12J+	8.4/11.2	28.66/38.21	40.4/46.7	60/68	60/60	70/70	60/60	-	-	-	-	
	A15J	10.8/14.4	36.84/49.13	52.0/60.0	75/85	80/80	90/90	70/80	-	-	-	-	
A20J	14.4/19.2	49.13/65.50	69.3/80.0	97/110	100/100	110/110	90/100	-	-	-	-		
*A21J+	14.4/19.2	49.13/65.50	69.3/80.0	97/110	100/100	110/110	90/100	-	-	-	-		

* = For Canadian use only. Uses "P" fuses for inductive circuit
 + = Field Installed Only

FIGURE 15
WIRING DIAGRAM


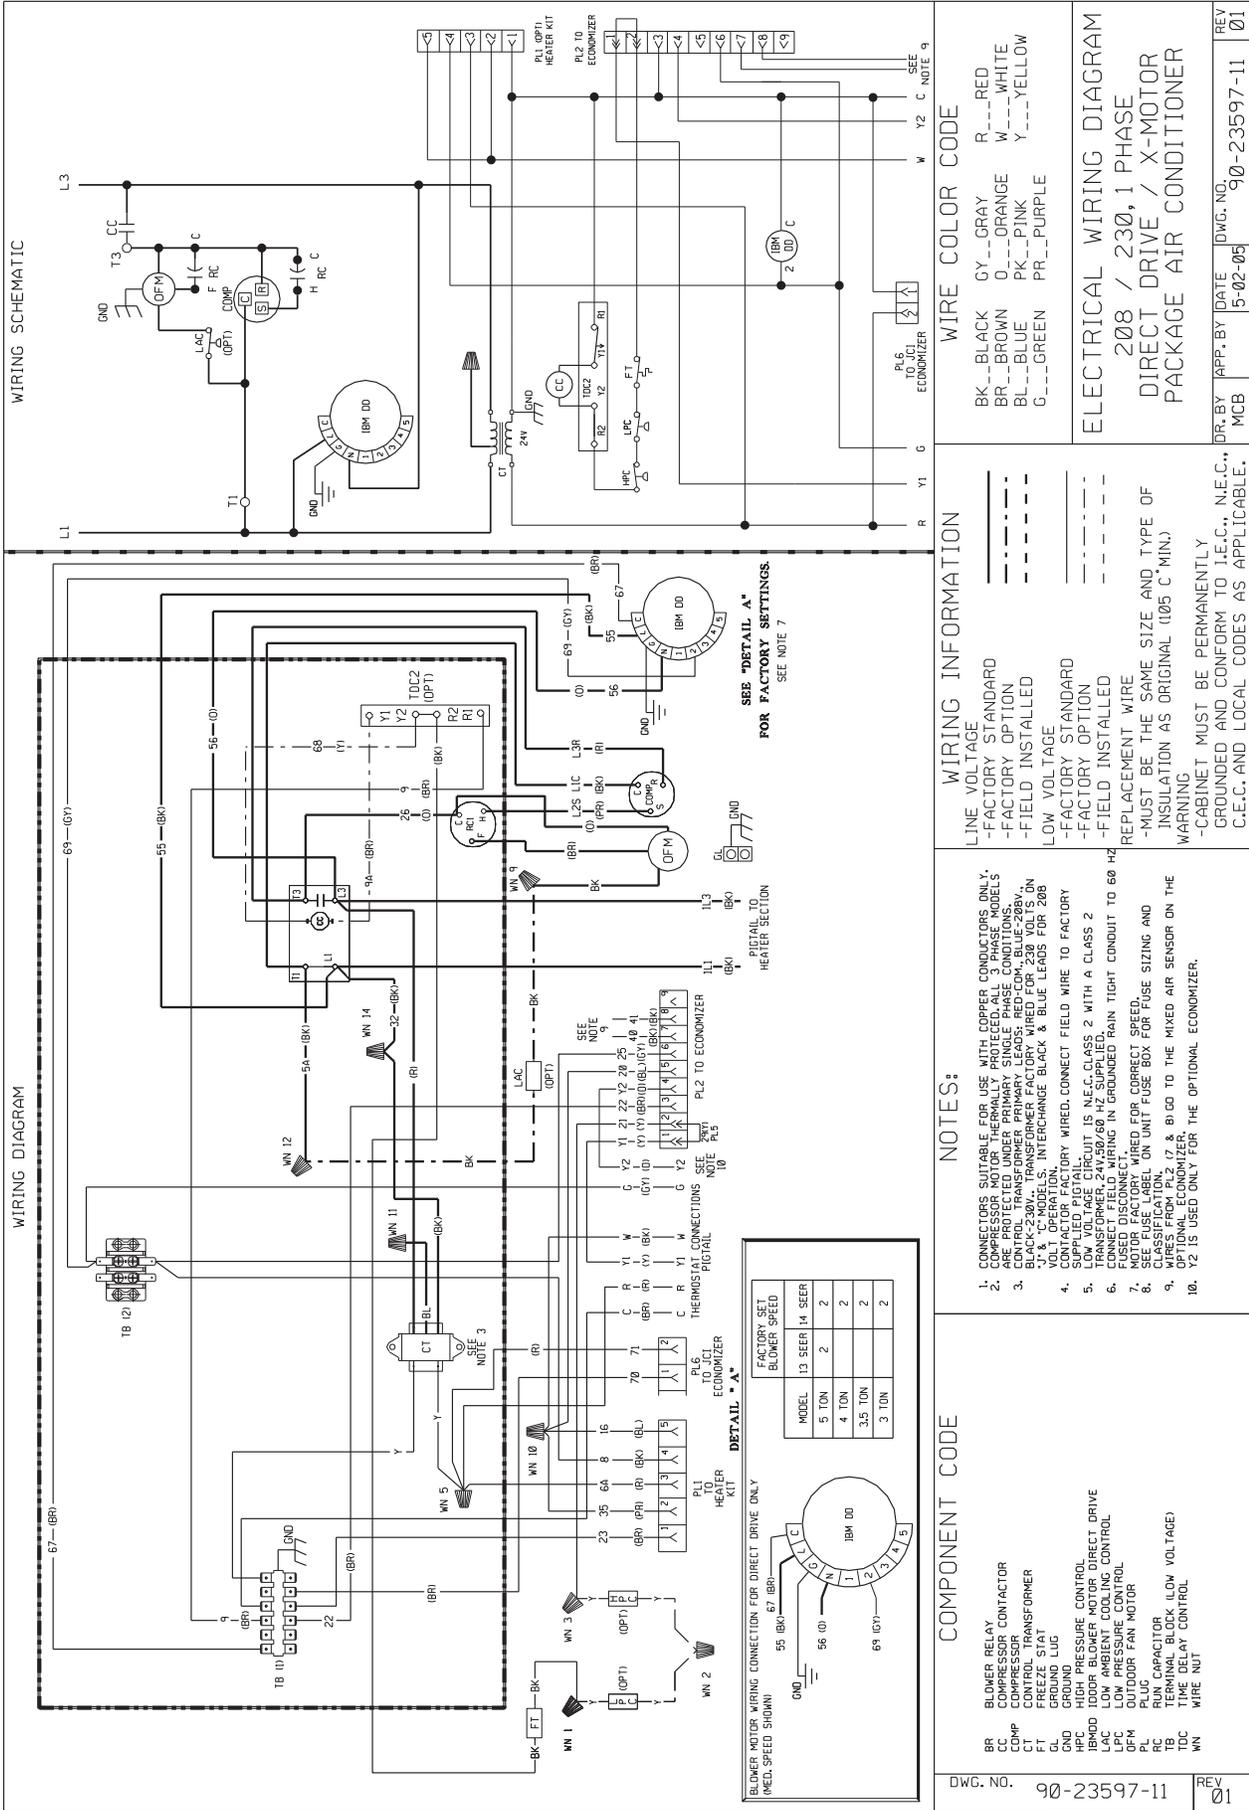


FIGURE 16
WIRING DIAGRAM

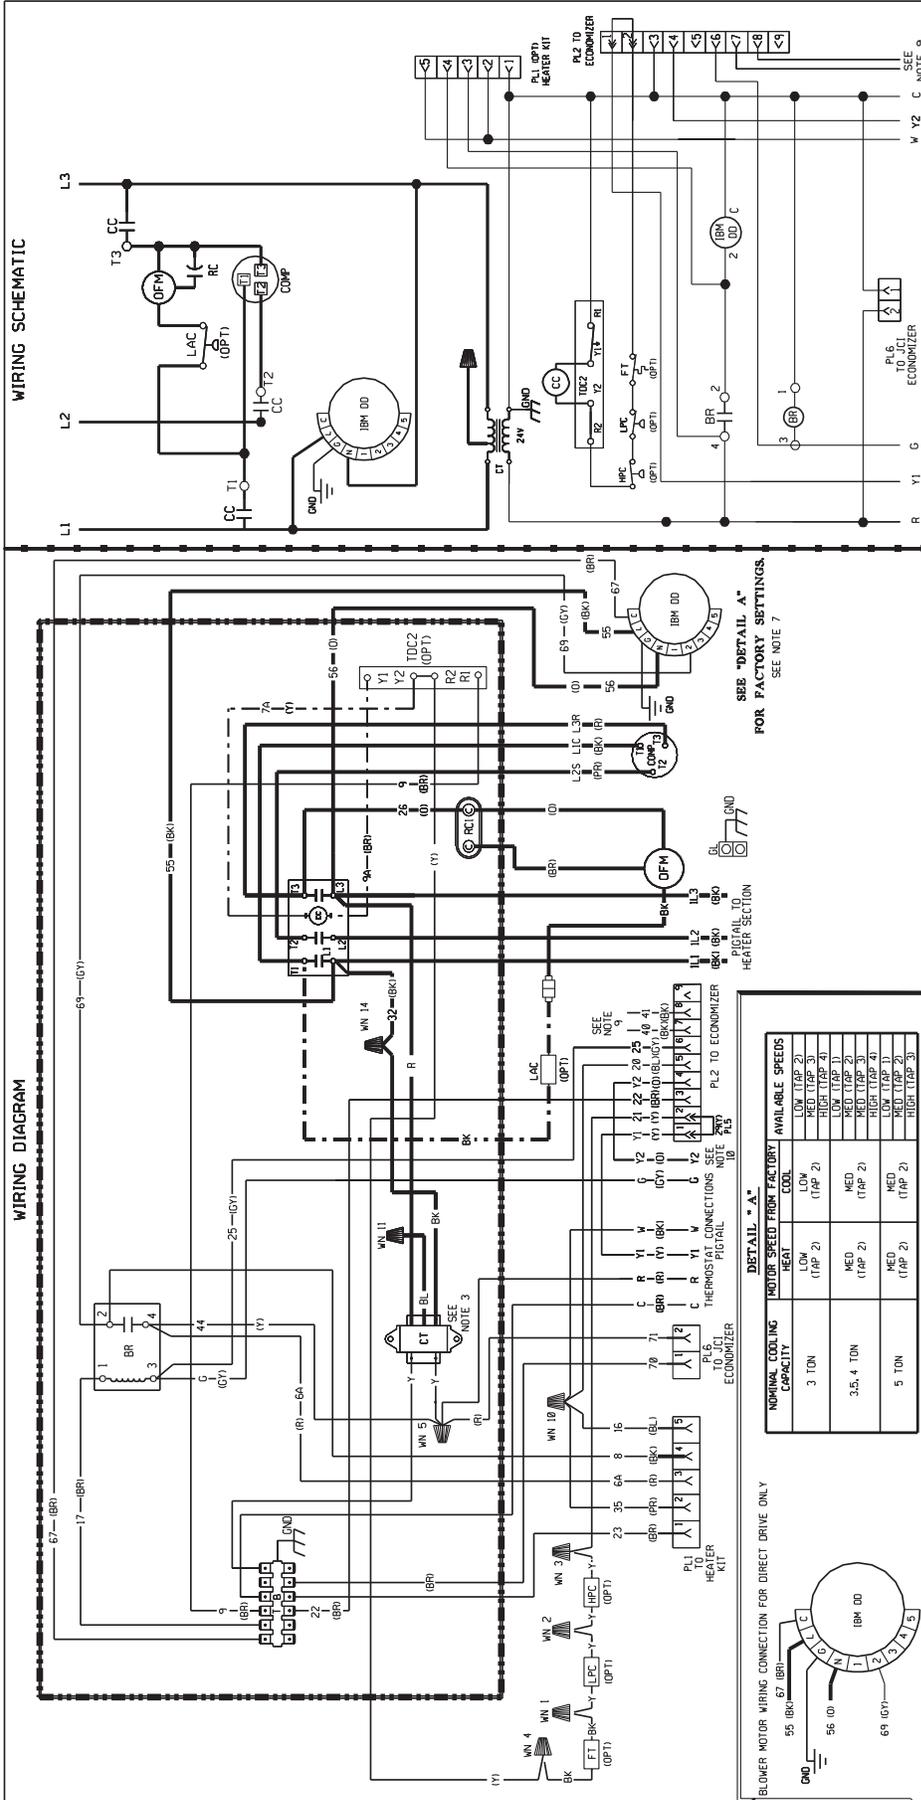

WIRING INFORMATION

LINE VOLTAGE
 -FACTORY STANDARD
 -FACTORY OPTION
 -FIELD INSTALLED

LOW VOLTAGE
 -FACTORY STANDARD
 -FIELD INSTALLED

REPLACEMENT WIRE
 -MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C MIN.)
 -WARNING:
 -CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C. AND LOCAL CODES AS APPLICABLE.

WIRE COLOR CODE

BK--BLACK GY--GRAY R--RED
 BR--BROWN O--ORANGE W--WHITE
 BL--BLUE PK--PINK Y--YELLOW
 G--GREEN PR--PURPLE

ELECTRICAL WIRING DIAGRAM
208 / 230 / 460V, 3 PHASE
DIRECT DRIVE/X-MOTOR
PACKAGE AIR CONDITIONER

DR. BY MCB **APP. BY** DATE 5-2-05 **ENG. NO.** 90-23597-12 **REV** 04


- NOTES:**
- CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
 - COMPRESSOR MOTOR THERMALLY PROTECTED. ALL 3 PHASE MODELS ARE PROTECTED UNDER PRIMARY SINGLE PHASE CONDITIONS.
 - 50 HZ. TRANSFORMER PRIMARY LEADS:
 RED-COM, BLUE-208V, BLACK-230V, BLACK/RED-460V, 230 VOLTS ON 575 C MODELS. INTERCHANGE BLACK & BLUE LEADS FOR CORRECT VOLTAGE.
 - ORANGE-COMMON, BLUE-380V, BLACK-415V.
 - CONTRACTOR FACTORY WIRE. CONNECT FIELD WIRE TO FACTORY LOW VOLTAGE CIRCUIT IS N.E.C. CLASS 2 WITH A CLASS 2 TRANSFORMER, 24V/56/60 HZ SUPPLIED.
 - FUSED DISCONNECT WIRING IN GROUNDED RAIN TIGHT CONDUIT TO 60 HZ.
 - MOTOR FACTORY WIRING FOR CORRECT SPEED.
 - SEE FUSE LABEL ON UNIT FUSE BOX FOR FUSE SIZING AND WIRE GAUGE.
 - WIRES FROM PL.2 (7 & 8) GO TO THE MIXED AIR SENSOR ON THE OPTIONAL ECONOMIZER.
 - Y. Z IS USED ONLY FOR THE OPTIONAL ECONOMIZER.

COMPONENT CODE

BR BLOWER RELAY
 CC COMPRESSOR CONTACTOR
 CCN COMPRESSOR TRANSFORMER
 FT FUSE
 GL GROUND LUG
 GND GROUND
 HPC HIGH PRESSURE CONTROL
 ISMD INDOOR BLOWER MOTOR DIRECT DRIVE
 LFC LOW PRESSURE CONTROL
 LPL LOW PRESSURE CONTROL
 ODM OUTDOOR FAN MOTOR
 PL PLUG
 TC THERMISTOR
 TDC TIME DELAY CONTROL
 WN WIRE NUT

NOMINAL COOLING CAPACITY	MOTOR SPEED FROM FACTORY	AVAILABLE SPEEDS
3 TON	HEAT	LOW (TAP 2)
	COOL	LOW (TAP 2)
		HIGH (TAP 4)
3.5, 4 TON	HEAT	MED (TAP 2)
	COOL	MED (TAP 2)
		HIGH (TAP 4)
5 TON	HEAT	MED (TAP 2)
	COOL	MED (TAP 2)
		HIGH (TAP 3)

FIGURE 17
WIRING DIAGRAM

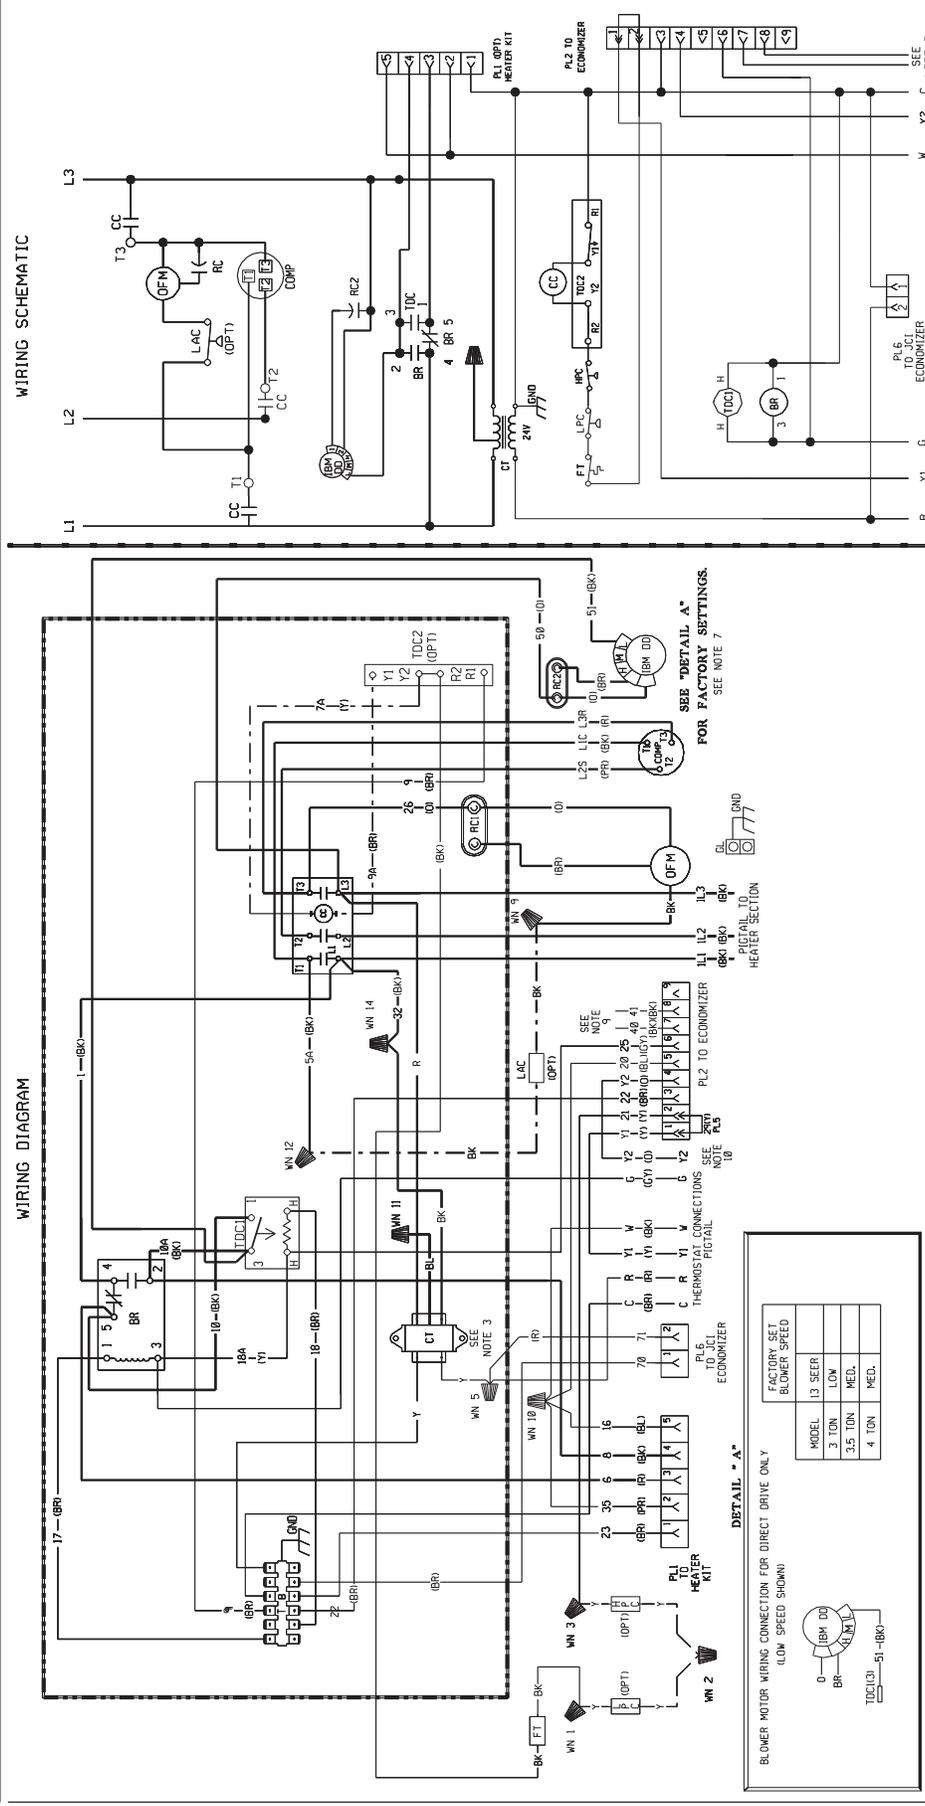

WIRING INFORMATION

LINE VOLTAGE
-FACTORY STANDARD
-FACTORY OPTION
-FIELD INSTALLED
LOW VOLTAGE
-FACTORY STANDARD
-FACTORY OPTION
-FIELD INSTALLED
REPLACEMENT WIRE
-MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C° MIN.)
-CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C. AND LOCAL CODES AS APPLICABLE.

NOTES:

- CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
- COMPRESSOR MOTOR CONNECTIONS: SEE NOTE 9.
- CONTROL TRANSFORMER PRIMARY LEADS: RED-COM, BLUE-208V, BLACK-230V. TRANSFORMER FACTORY WIRING FOR 230 VOLTS ON VOLTS OPERATION. INTERCHANGE BLACK & BLUE LEADS FOR 208 VOLTS OPERATION.
- CONTRACTOR FACTORY WIRING: CONNECT FIELD WIRE TO FACTORY SUPPLIED DIGITAL CIRCUIT IS N.E.C. CLASS 2 WITH A CLASS 2 TRANSFORMER, 24V, 50/60 HZ SUPPLIED.
- CONNECT FIELD WIRING IN GROUNDED RAIN TIGHT CONDUIT TO 60 HZ FUSED DISCONNECTED FOR CORRECT SPEED.
- SEE FUSE LABEL ON UNIT FUSE BOX FOR FUSE SIZING AND CLASSIFICATION.
- OPTIONAL ECONOMIZER, W/ & Ø TO THE MIXED AIR SENSOR ON THE OPTIONAL ECONOMIZER.
- Y2 IS USED ONLY FOR THE OPTIONAL ECONOMIZER.

COMPONENT CODE

BR BLOWER RELAY
CC COMPRESSOR CONTACTOR
COMP COMPRESSOR
CT CONTROL TRANSFORMER
FT FUSE
LUG LUG
GND GROUND
HPC HIGH PRESSURE CONTROL
IDMDD INDUCED DRAFT MOTOR DIRECT DRIVE
LAC LOW AMBIENT COOLING CONTROL
LFC LOW FIELD CONTROL
OPM OUTDOOR FAN MOTOR
PL PLUG
RC RUN CAPACITOR
TB TERMINAL BLOCK (LOW VOLTAGE)
UC UNIT CONTROL
WN WIRE NUT


WIRE COLOR CODE

O --- ORANGE
PR --- PURPLE
R --- RED
W --- WHITE
Y --- YELLOW

ELECTRICAL WIRING DIAGRAM
208 / 230V, 3 PHASE
DIRECT DRIVE
PACKAGE AIR CONDITIONER

DR. BY MCB
APP. BY DATE 5-19-05
DWG. NO. 90-23597-13
REV 00

FIGURE 18
WIRING DIAGRAM

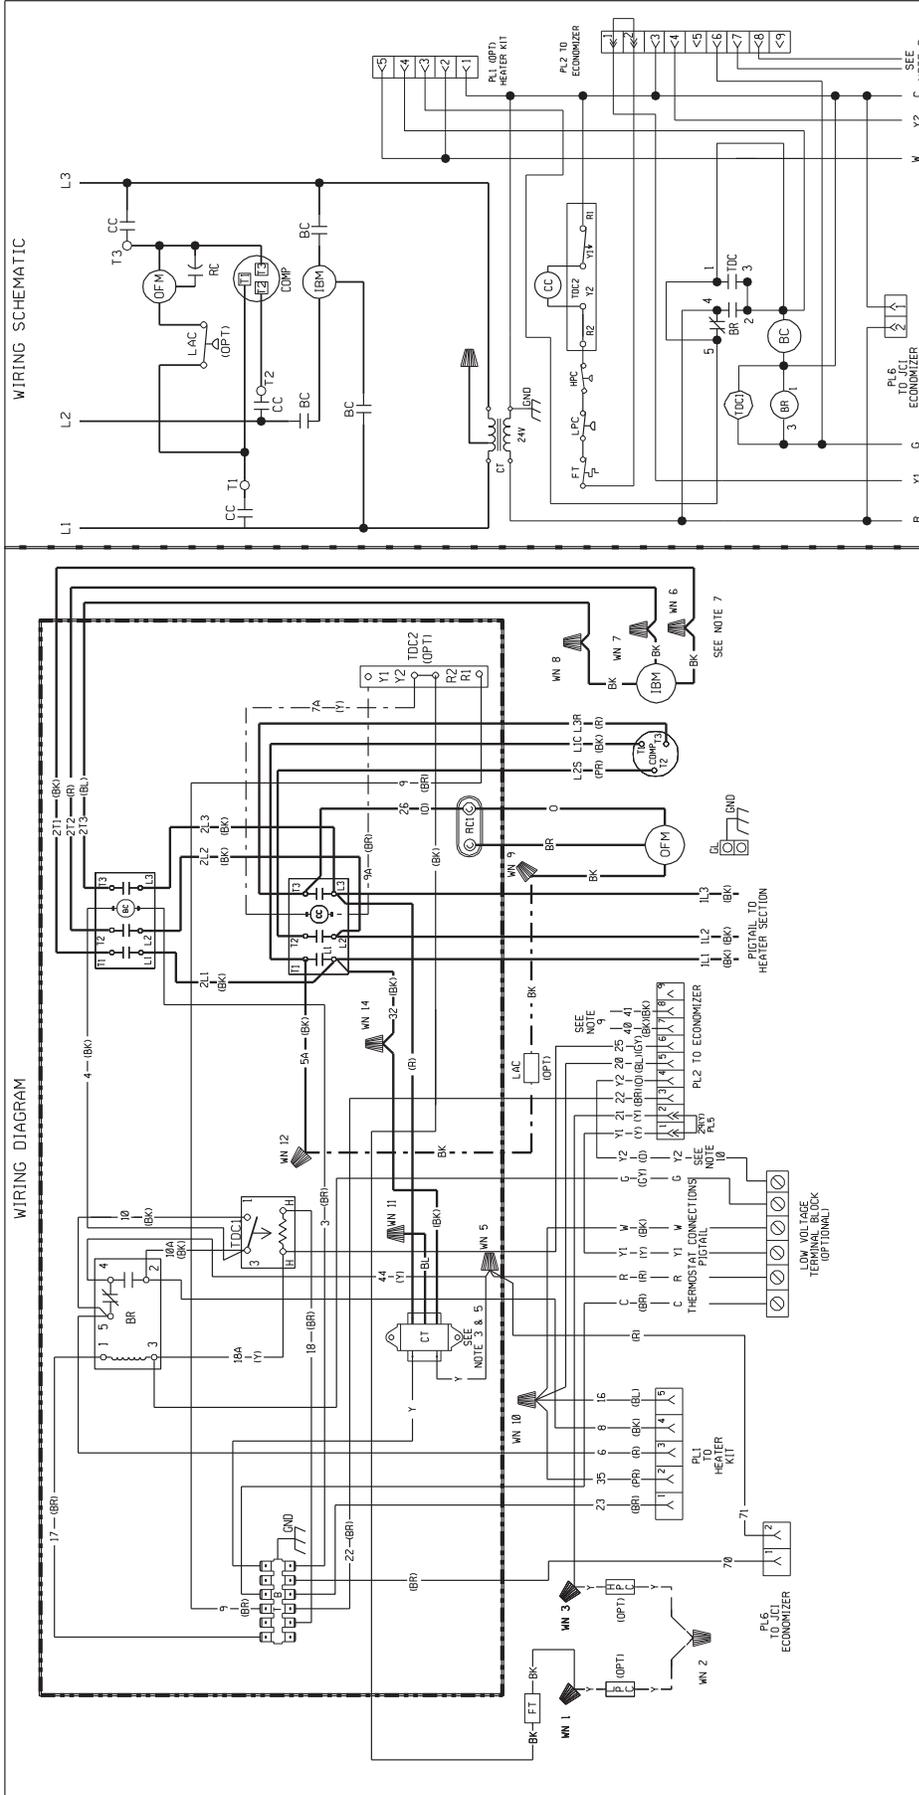

COMPONENT CODE		WIRE COLOR CODE	
BC	BLOWER MOTOR	BK	BLACK
BR	BLOWER RELAY	BR	BROWN
CC	COMPRESSOR CONTACTOR	BL	BLUE
CC	COMPRESSOR TRANSFORMER	G	GREEN
CT	CONDENSER FAN CONTACTOR	GY	GRAY
FT	FREESTAT	O	ORANGE
GL	GROUND LUG	PR	PURPLE
OND	GROUND	R	RED
HP	HIGH PRESSURE CONTROL	W	WHITE
HP	HIGH PRESSURE SWITCH	Y	YELLOW
LAC	LOW AMBIENT CONTROL		
LPC	LOW PRESSURE CONTROL		
OFM	OUTDOOR FAN MOTOR		
PL	PLUG CAPACITOR		
PL	PLUG		
TB	TERMINAL BLOCK (LOW VOLTAGE)		
TDC	TIME DELAY CONTROL		
WN	WIRE NUT		


WIRING INFORMATION	
LINE VOLTAGE	-FACTORY STANDARD
	-FACTORY OPTION
	-FIELD INSTALLED
LOW VOLTAGE	-FACTORY STANDARD
	-FACTORY OPTION
	-FIELD INSTALLED
REPLACEMENT WIRE	-MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (1005 C*MIN.)
WARNING	-CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C. AND LOCAL CODES AS APPLICABLE.

NOTES:	
1.	CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY. COMPRESSOR MOTOR THERMALLY PROTECTED, ALL 3 PHASE MODELS ARE PROTECTED UNDER PRIMARY SINGLE PHASE CONDITIONS.
2.	CONTROL TRANSFORMER PRIMARY LEADS: RED-COM, BLUE-208V, BLACK-230V, BLACK/RED-460V, BLACK/BLUE-575V. TRANSFORMER BLACK/WHITE LEADS 230V/460V/575V. INTERCHANGE BLACK/WHITE LEADS FOR 460V OPERATION. 460 & 575 VOLT 50-HZ. COMMON BLUE-380V, BLACK-415V.
3.	CONNECTOR FACTORY WIRE, CONNECT FIELD WIRE TO FACTORY SUPPLIED PICTAL.
4.	LOW VOLTAGE CIRCUIT IS N.E.C. CLASS 2 WITH A CLASS 2 FUSED DISCONNECT. WIRE FOR CORRECT SPEED.
5.	CONNECT FIELD WIRING IN GROUNDED RAIN TIGHT CONDUIT TO 60 HZ.
6.	USE FUSE LABEL ON UNIT FUSE BOX FOR FUSE SIZING AND CLASSIFICATION.
7.	WIRE FROM PL.2 (7 & 8) GO TO THE MIXED AIR SENSOR ON THE HEATER SECTION.
8.	WIRE FROM PL.2 (7 & 8) GO TO THE MIXED AIR SENSOR ON THE HEATER SECTION.
9.	WIRE FROM PL.2 (7 & 8) GO TO THE MIXED AIR SENSOR ON THE HEATER SECTION.
10.	WIRE FROM PL.2 (7 & 8) GO TO THE MIXED AIR SENSOR ON THE HEATER SECTION.


ELECTRICAL WIRING DIAGRAM	
208/230/460/575V, 3 PHASE 60 HZ.	
BELT DRIVE	
PACKAGE AIR CONDITIONER	

DR. BY / APP. BY / DATE		DWG. NO.		REV	
MCB		90-23597-14		00	

FIGURE 19
WIRING DIAGRAM

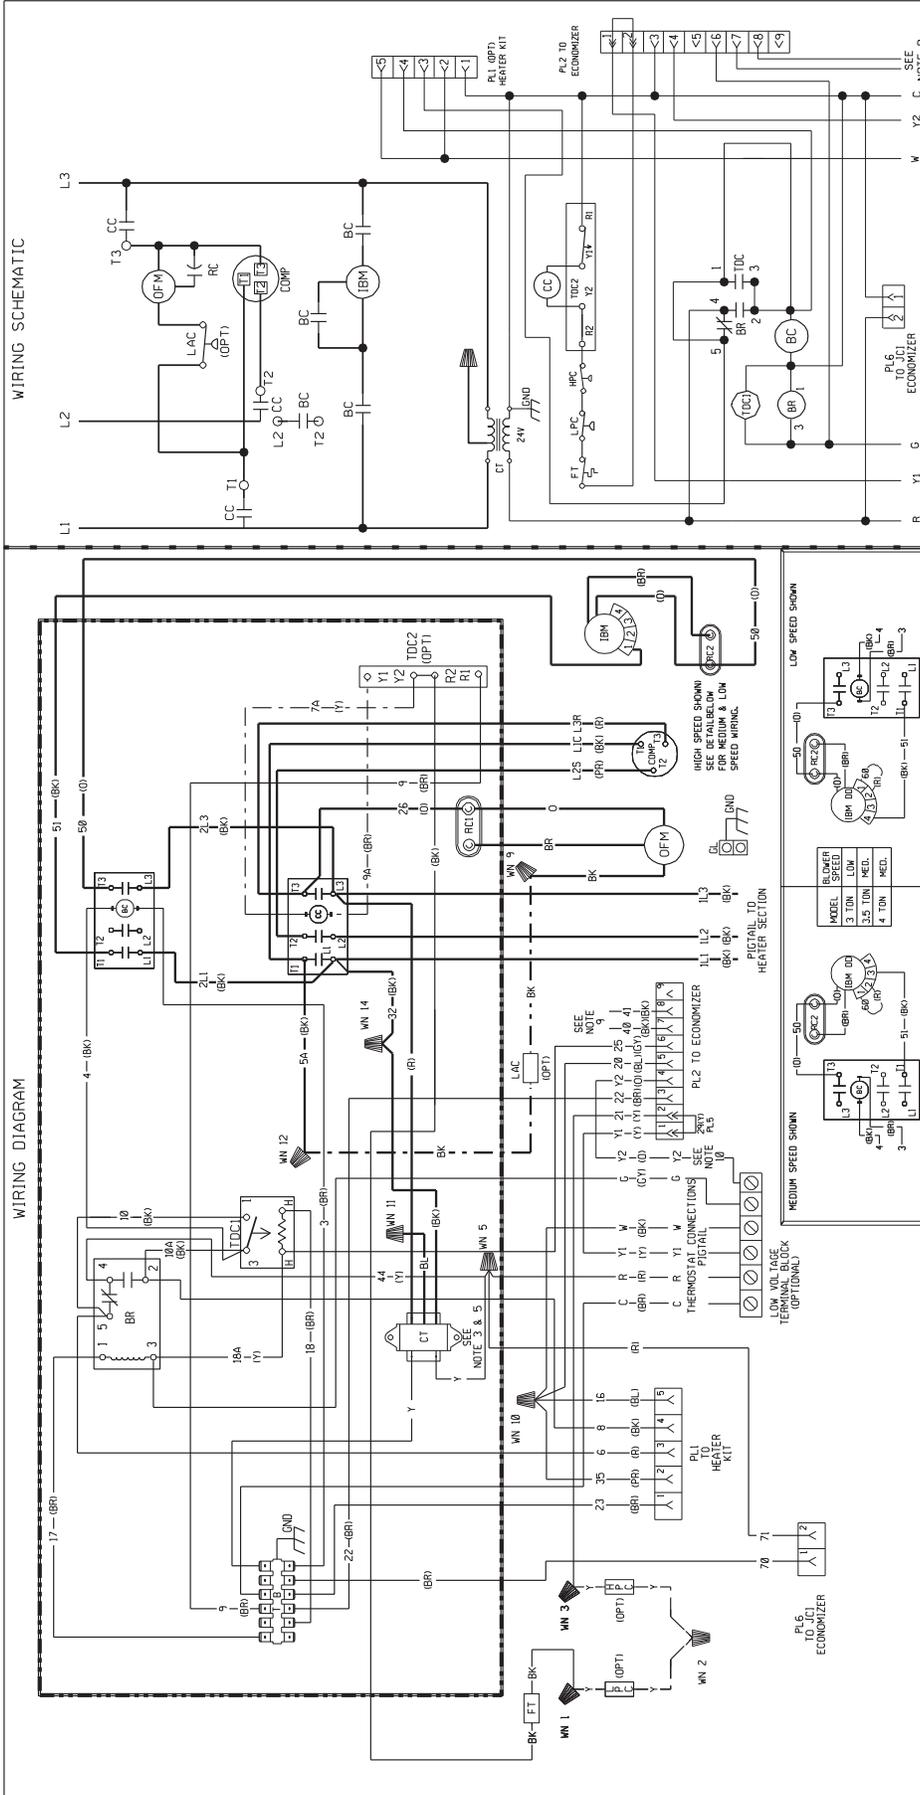

WIRING SCHEMATIC

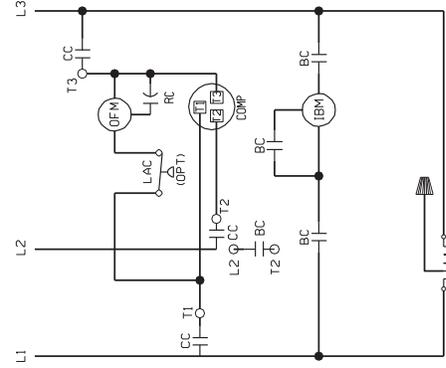

COMPONENT CODE

BC	BLOWER MOTOR
BR	BLOWER RELAY
CC	COMPRESSOR CONTACTOR
COMP	COMPRESSOR
CT	COMPRESSOR TRANSFORMER
FT	FREESTAT
GL	GROUND LUG
GN	GROUND
HP	HIGH PRESSURE CONTROL
IBK	INDICATOR BLOWER RELAY DRIVE
LAC	LOW AMBIENT PRESSURE CONTROL
LPC	LOW AMBIENT PRESSURE CONTROL
OFM	OUTDOOR FAN MOTOR
PL	PLUG
PLC	PLUG CAPACITOR
RB	REVERSE
TB	TERMINAL BLOCK (LOW VOLTAGE)
TDC	TIME DELAY
WN	WIRE NUT

WIRING INFORMATION

LINE VOLTAGE
 -FACTORY STANDARD
 -FACTORY OPTION
 -FIELD INSTALLED

LOW VOLTAGE
 -FACTORY STANDARD
 -FACTORY OPTION
 -FIELD INSTALLED

REPLACEMENT WIRE
 -MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (1005 C*MIN.)

WARNING
 -CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C. AND LOCAL CODES AS APPLICABLE.

NOTES:

- CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY. COMPRESSOR MOTOR THERMALLY PROTECTED ALL 3 PHASE MODELS.
- CONTROL TRANSFORMER PRIMARY LEADS.
- CONTROL TRANSFORMER PRIMARY LEADS: RED-COM, BLUE-208V, BLACK-230V, BLACK/RED-460V, BLACK/BLUE-575V. TRANSFORMER BLACK-230V, BLACK/RED-208V, BLACK/BLUE-230V, BLACK/BLUE-230V, INTERCHANGE BLACK/BLUE LEADS FOR 208V OR 230V OPERATION. 460 & 575 VOLT MODELS FACTORY WIRED FOR CORRECT VOLTAGE.
- COMMON BLUE-380V, BLACK-415V. CONTACTOR FACTORY WIRED. CONNECT FIELD WIRE TO FACTORY CONTACTOR PICTAIL.
- LOW VOLTAGE CIRCUIT IS N.E.C. CLASS 2 WITH A CLASS 2 REPLACEMENT WIRE.
- CONNECT FIELD WIRING IN GROUNDED RAIN TIGHT CONDUIT TO 60 HZ SUPPLIED PICTAIL.
- FUSED DISCONNECT. WIRE FOR CORRECT SPEED.
- SEE LABEL ON UNIT FUSE BOX FOR FUSE SIZING AND CLASSIFICATION.
- WIRES FROM PL2 17 & B1 GO TO THE MIXED AIR SENSOR ON THE ECONOMIZER. WIRE FROM PL2 18 GO TO THE OPTIONAL ECONOMIZER.

WIRE COLOR CODE


BK	BLACK
BR	BROWN
BL	BLUE
G	GREEN
GY	GRAY
O	ORANGE
PR	PURPLE
R	RED
W	WHITE
Y	YELLOW

ELECTRICAL WIRING DIAGRAM


460V, 3 PHASE 60 HZ.
DIRECT DRIVE
PACKAGE AIR CONDITIONER

DR. BY: MCB
APP. BY: DATE: 5-19-05
DWG. NO.: 90-23597-15
REV: 00


FIGURE 20
WIRING DIAGRAM

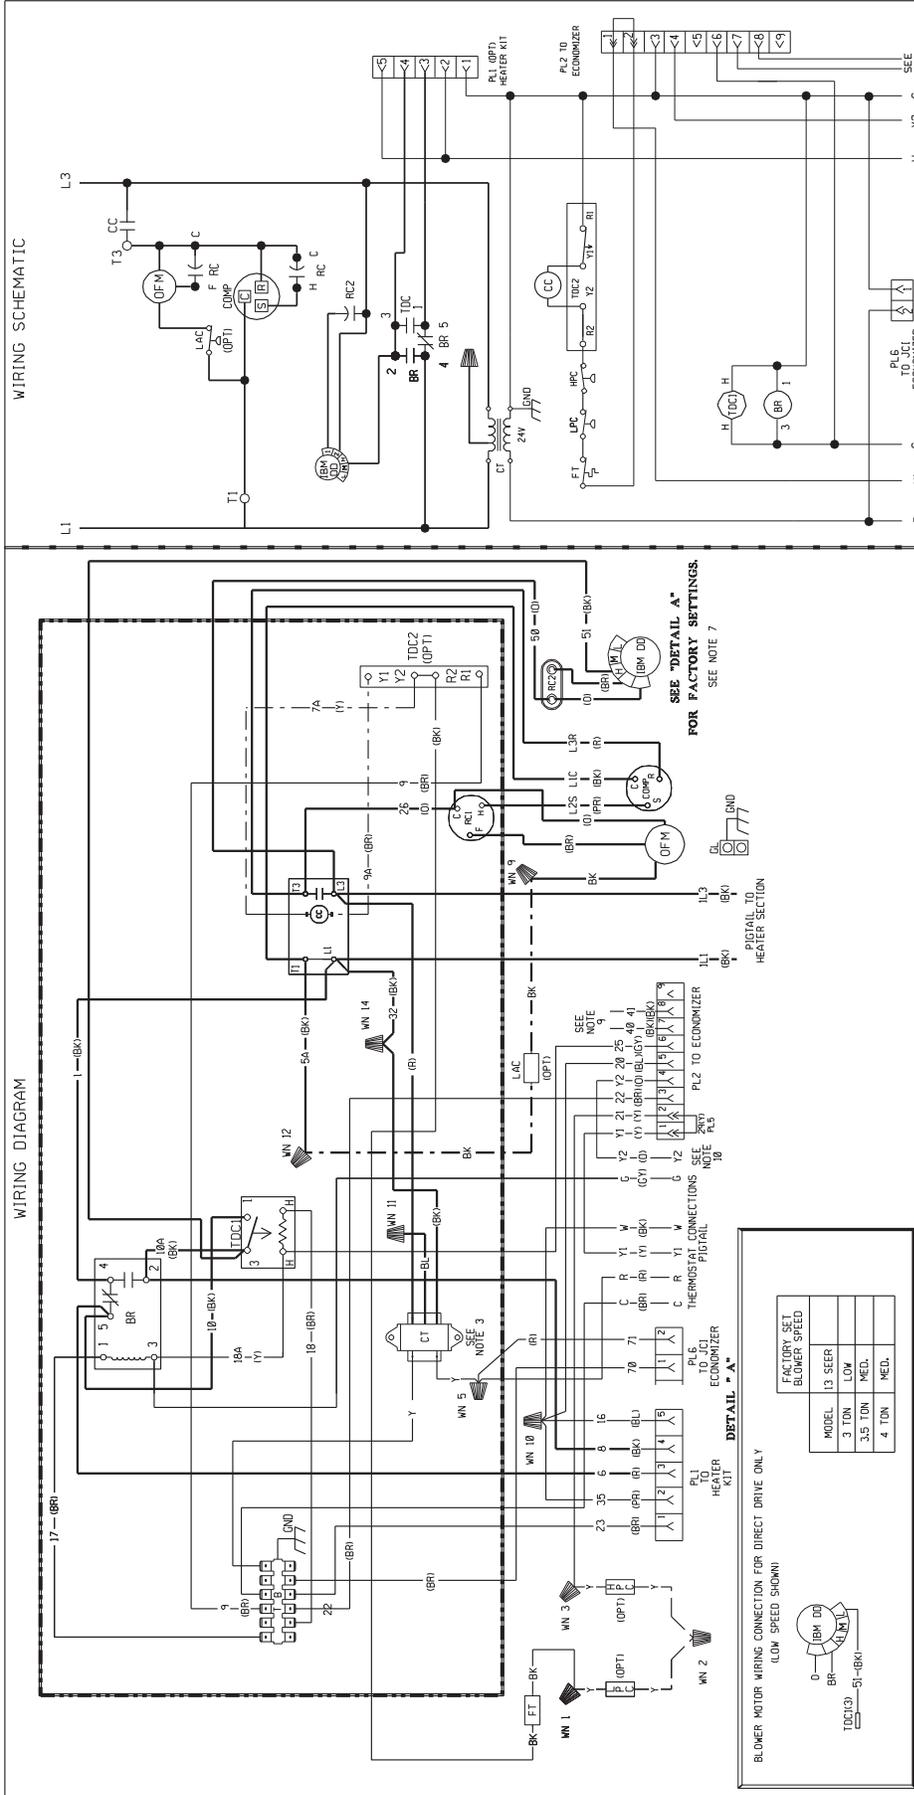

WIRING SCHEMATIC

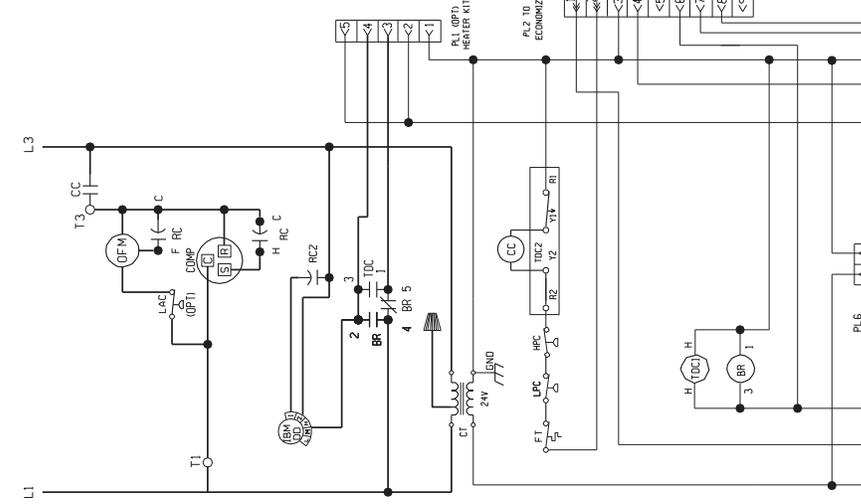

WIRING DIAGRAM

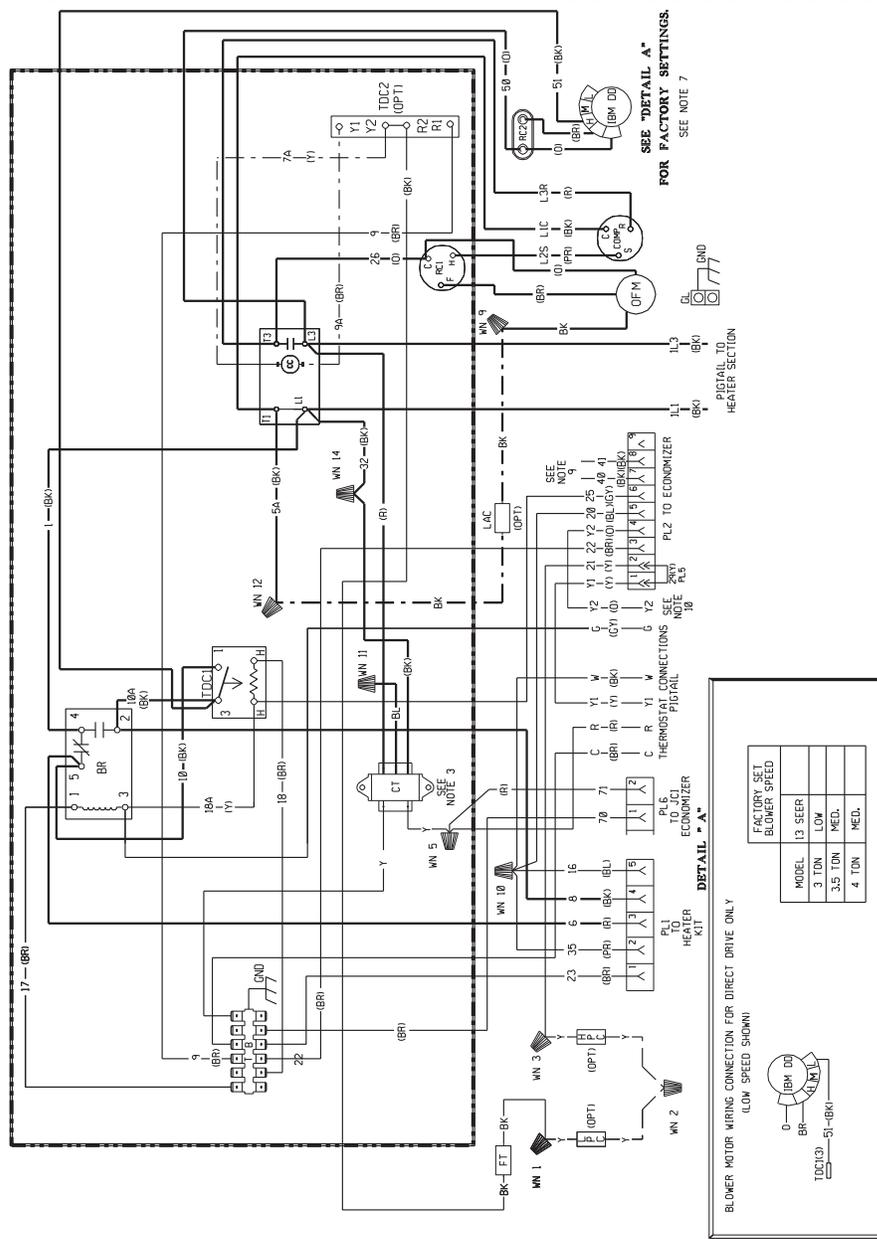


FOR FACTORY SETTINGS

SEE NOTE 7

DETAIL A

SEE NOTE 3

MODEL	FACTORY SET BLOWER SPEED
3 TON	LOW
3.5 TON	MED.
4 TON	MED.



COMPONENT CODE

BR BLOWER RELAY
 CC COMPRESSOR CAPACITOR
 CC COMPRESSOR CAPACITOR
 CT CONTACTOR
 F FUSE
 GL GROUND
 GND GROUND
 HPC HIGH PRESSURE CONTROL
 IMBDD INDOOR BLOWER MOTOR DIRECT DRIVE
 IMBDD INDOOR BLOWER MOTOR BELT DRIVE
 LAC LOW AMBIENT COILING CONTROL
 LPC LOW PRESSURE CONTROL
 OFM OUTDOOR FAN MOTOR
 PL PLUG CAPACITOR
 PL PLUG CAPACITOR
 TB TERMINAL BLOCK (LOW VOLTAGE)
 TDC TIME DELAY CONTROL
 WN WIRE NUT

WIRING INFORMATION

LINE VOLTAGE
 -FACTORY STANDARD
 -FACTORY OPTION
 -FIELD INSTALLED

LOW VOLTAGE
 -FACTORY STANDARD
 -FACTORY OPTION
 -FIELD INSTALLED

REPLACEMENT WIRE
 -MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (1005 C*MIN.)
 WARNING
 -CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C. AND LOCAL CODES AS APPLICABLE.

NOTES:

- CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
- WIRE PROTECTED UNDER PRIMARY SINGLE PHASE CONDITION.
- CONTROL TRANSFORMER PRIMARY LEADS: RED-COM., BLUE-208V., BLACK-230V. TRANSFORMER FACTORY WIRE FOR 230 VOLTS ON VOLT OPERATION. INTERCHANGE BLACK & BLUE LEADS FOR 208 VOLT OPERATION.
- CONTACTOR FACTORY WIRE. CONNECT FIELD WIRE TO FACTORY SUPPLY. USE CIRCUIT IS N.E.C. CLASS 2 WITH A CLASS 2 TRANSFORMER, 24V/50/60 HZ SUPPLIED.
- CONNECT FIELD WIRING IN GROUNDED RAIN TIGHT CONDUIT TO 60 HZ.
- NOTE: FACTORY WIRE FOR CORRECT SPEED.
- SEE FUSE LABEL ON UNIT FUSE BOX FOR FUSE SIZING AND CLASSIFICATION.
- OPTIONAL ECONOMIZER.
- Y2 IS USED ONLY FOR THE OPTIONAL ECONOMIZER.

WIRE COLOR CODE

BK---BLACK
 BR---BROWN
 BL---BLUE
 G---GREEN
 GY---GRAY
 O---ORANGE
 PR---PURPLE
 R---RED
 W---WHITE
 Y---YELLOW

ELECTRICAL WIRING DIAGRAM
208 / 230, 1 PHASE
DIRECT DRIVE
PACKAGE AIR CONDITIONER

DWG. NO. 90-23597-16
 REV 00


DR. BY / APP. BY DATE 5-23-06
 MCB 90-23597-16
 REV 00

3 TON AIR CONDITIONER - 13 & 14 SEER

SYSTEM CHARGE CHART - REFRIGERANT 410A 3 TON, 13 & 14 SEER

CAUTION: 1. RETURN AIR TEMPERATURE MUST BE WITHIN COMFORT CONDITIONS BEFORE FINAL REFRIGERANT CHECK!

- INSTRUCTIONS:**
1. MEASURE PRESSURE AT COMPRESSOR SUCTION AND LIQUID.
 2. MEASURE OUTDOOR AMBIENT TO UNIT.
 3. PLACE (X) ON CHART WHERE SUCTION AND LIQUID INTERSECT.
 4. IF (X) IS BELOW OUTDOOR AMBIENT LINE, ADD CHARGE AND REPEAT STEP 3.
 5. IF (X) IS ABOVE OUTDOOR AMBIENT LINE, RECOVER EXCESS CHARGE AND REPEAT STEP 3.

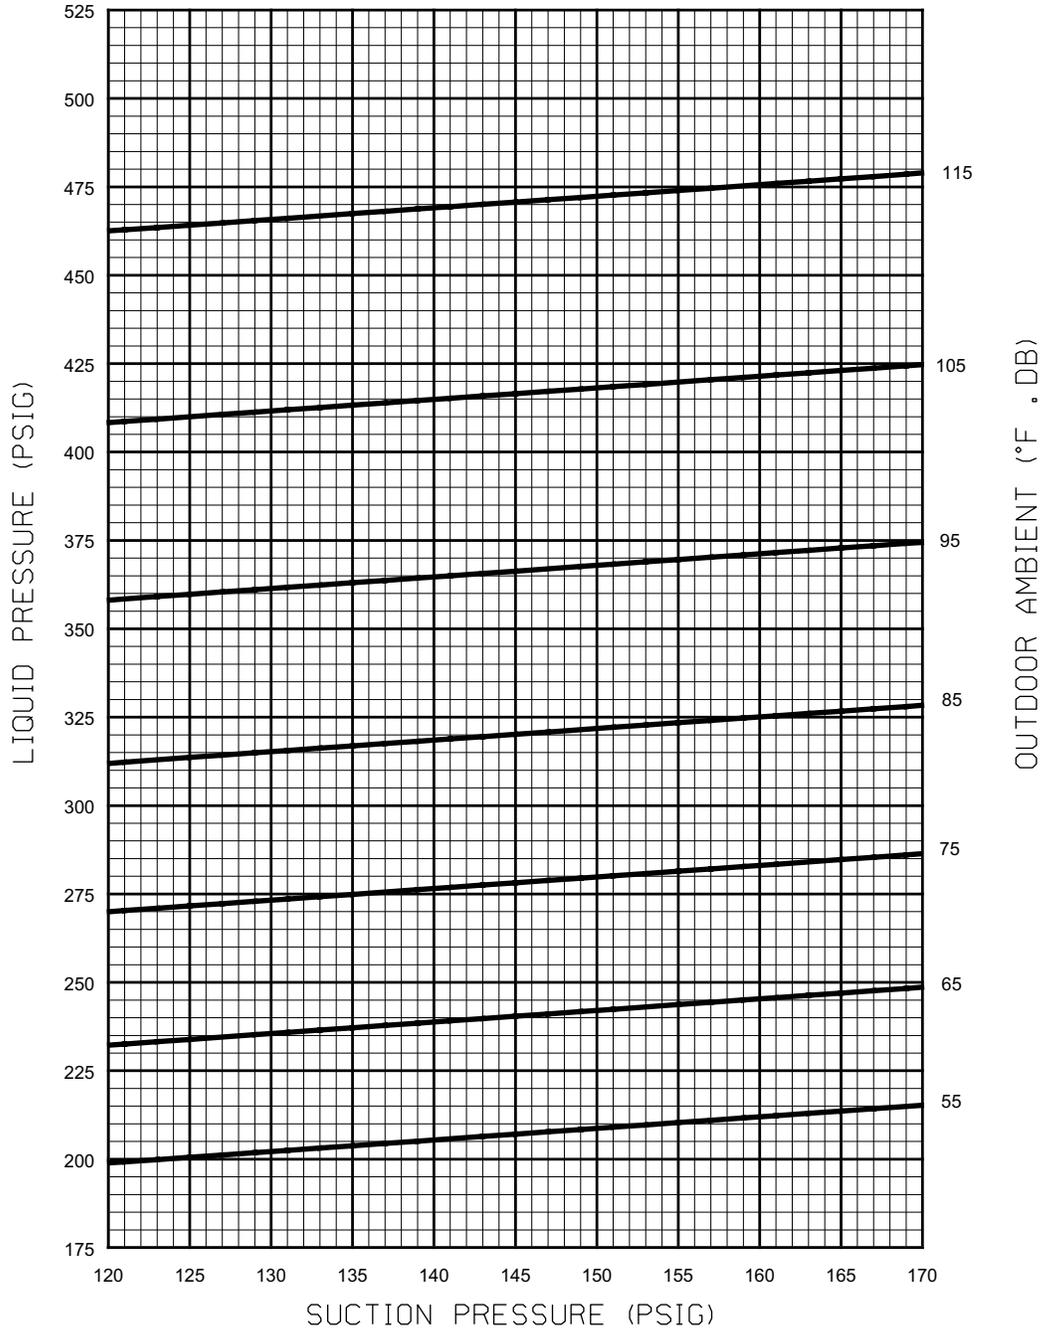


92-102259-01-01

3.5 TON AIR CONDITIONER - 13 & 14 SEER

SYSTEM CHARGE CHART - REFRIGERANT 410A 3.5 TON, 13 & 14 SEER

CAUTION: 1. RETURN AIR TEMPERATURE MUST BE WITHIN COMFORT CONDITIONS BEFORE FINAL REFRIGERANT CHECK!

- INSTRUCTIONS:**
1. MEASURE PRESSURE AT COMPRESSOR SUCTION AND LIQUID.
 2. MEASURE OUTDOOR AMBIENT TO UNIT.
 3. PLACE (X) ON CHART WHERE SUCTION AND LIQUID INTERSECT.
 4. IF (X) IS BELOW OUTDOOR AMBIENT LINE, ADD CHARGE AND REPEAT STEP 3.
 5. IF (X) IS ABOVE OUTDOOR AMBIENT LINE, RECOVER EXCESS CHARGE AND REPEAT STEP 3.

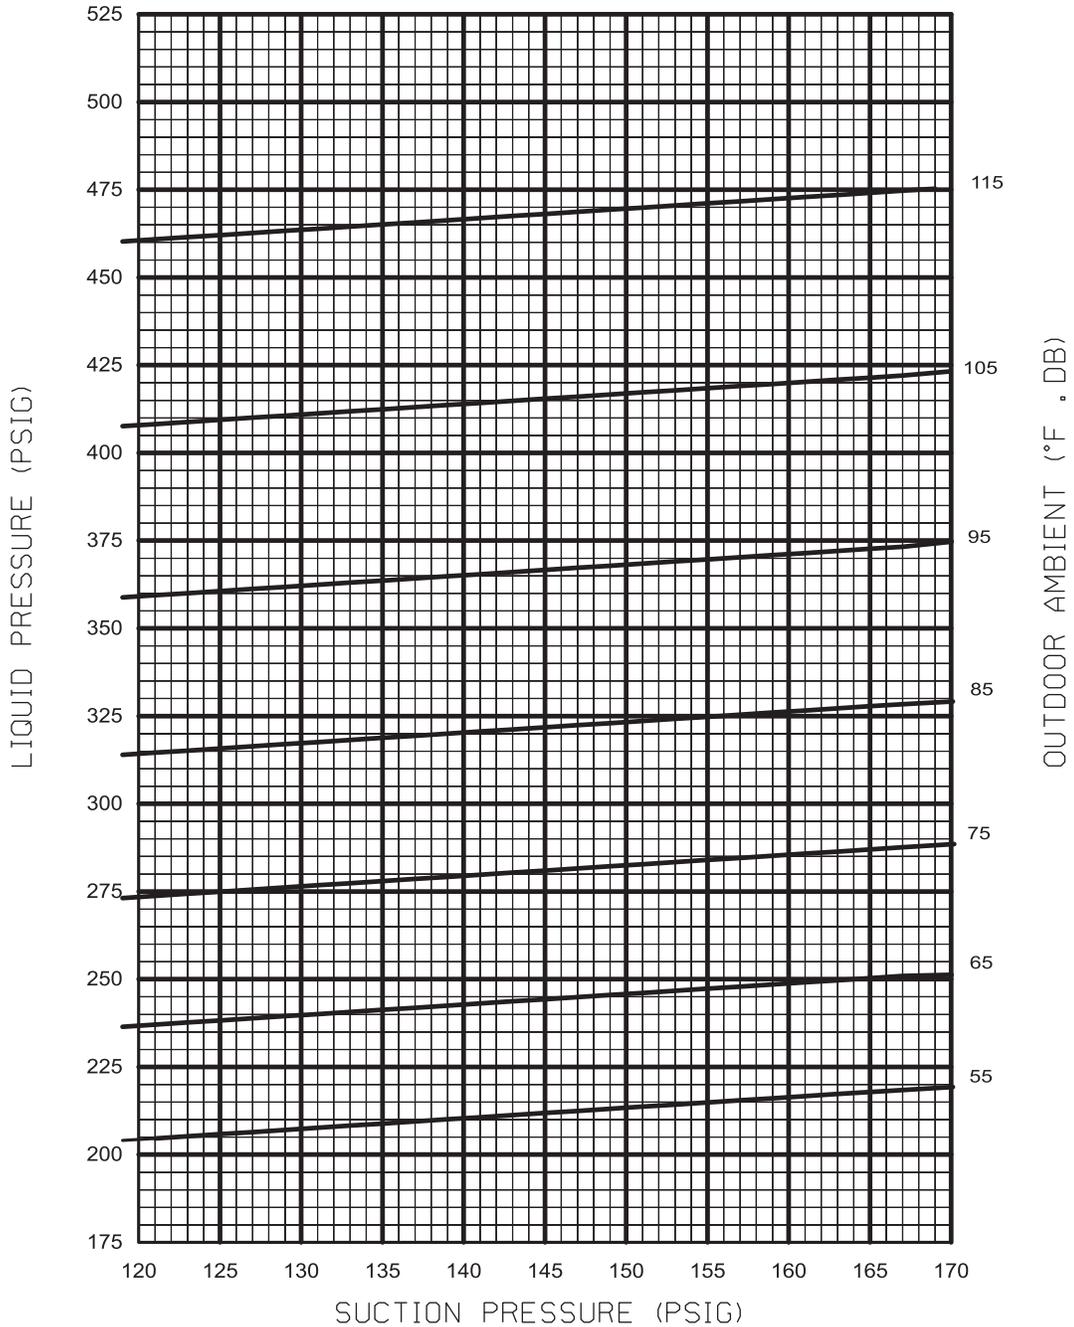


4 TON AIR CONDITIONER - 13 & 14 SEER

SYSTEM CHARGE CHART - REFRIGERANT 410A 4 TON, 13 & 14 SEER

CAUTION: 1. RETURN AIR TEMPERATURE MUST BE WITHIN COMFORT CONDITIONS BEFORE FINAL REFRIGERANT CHECK!

INSTRUCTIONS: 1. MEASURE PRESSURE AT COMPRESSOR SUCTION AND LIQUID.
2. MEASURE OUTDOOR AMBIENT TO UNIT.
3. PLACE (X) ON CHART WHERE SUCTION AND LIQUID INTERSECT.
4. IF (X) IS BELOW OUTDOOR AMBIENT LINE, ADD CHARGE AND REPEAT STEP 3.
5. IF (X) IS ABOVE OUTDOOR AMBIENT LINE, RECOVER EXCESS CHARGE AND REPEAT STEP 3.

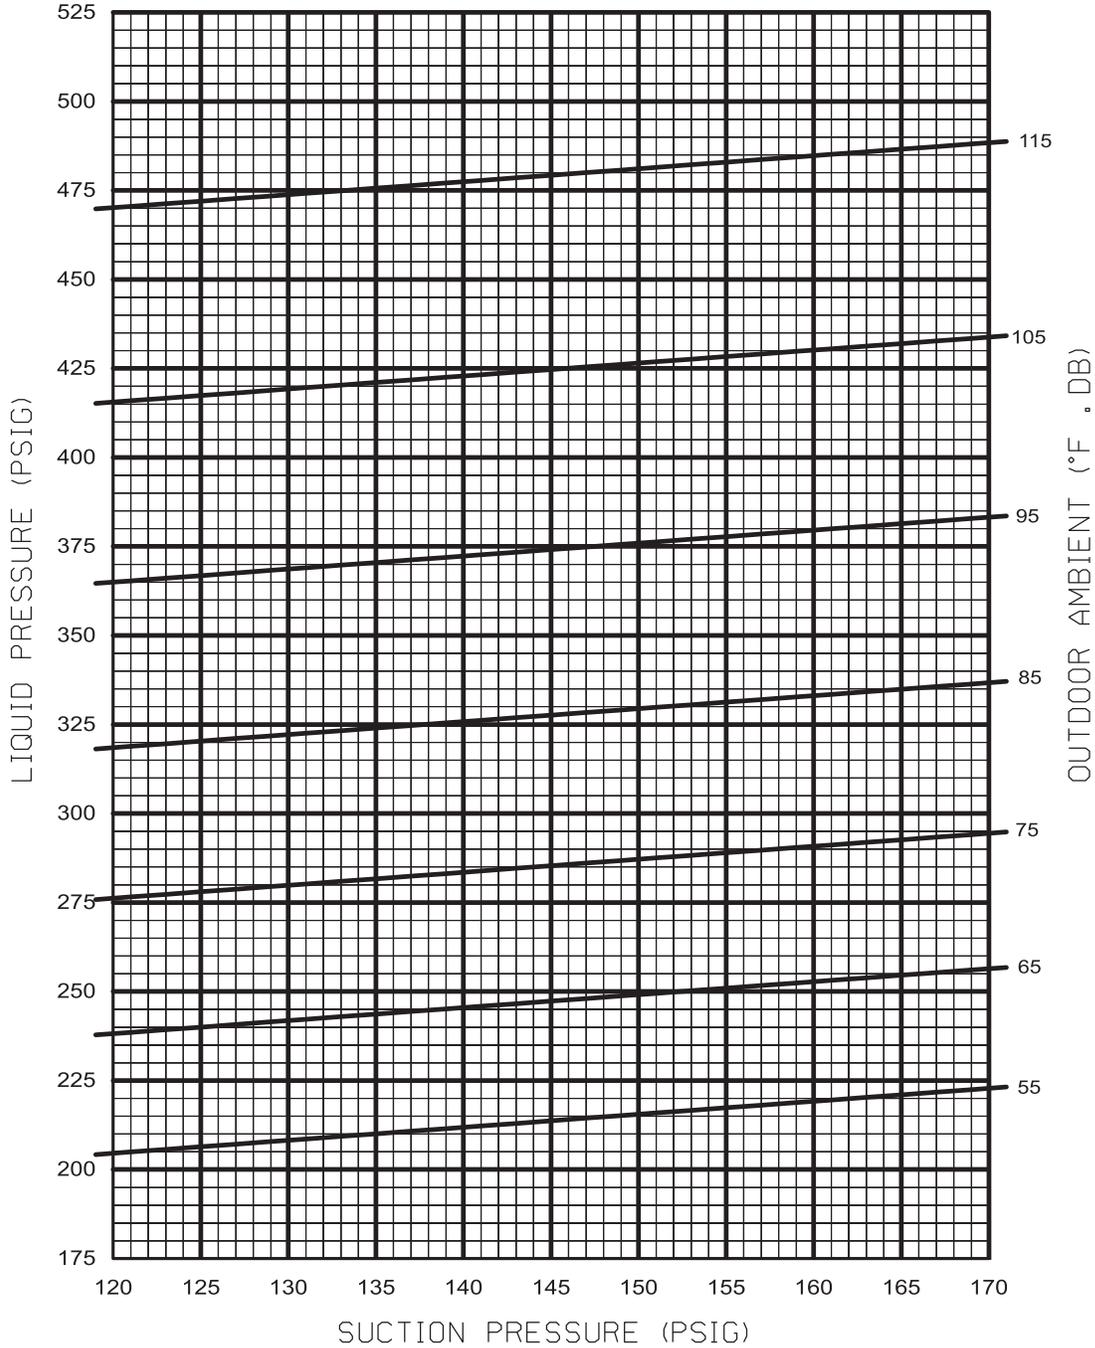


92-102259-03-00

5 TON AIR CONDITIONER - 13 SEER

SYSTEM CHARGE CHART - REFRIGERANT 410A 5 TON, 13 SEER

CAUTION: 1. RETURN AIR TEMPERATURE MUST BE WITHIN COMFORT CONDITIONS BEFORE FINAL REFRIGERANT CHECK!

- INSTRUCTIONS:**
1. MEASURE PRESSURE AT COMPRESSOR SUCTION AND LIQUID.
 2. MEASURE OUTDOOR AMBIENT TO UNIT.
 3. PLACE (X) ON CHART WHERE SUCTION AND LIQUID INTERSECT.
 4. IF (X) IS BELOW OUTDOOR AMBIENT LINE, ADD CHARGE AND REPEAT STEP 3.
 5. IF (X) IS ABOVE OUTDOOR AMBIENT LINE, RECOVER EXCESS CHARGE AND REPEAT STEP 3.

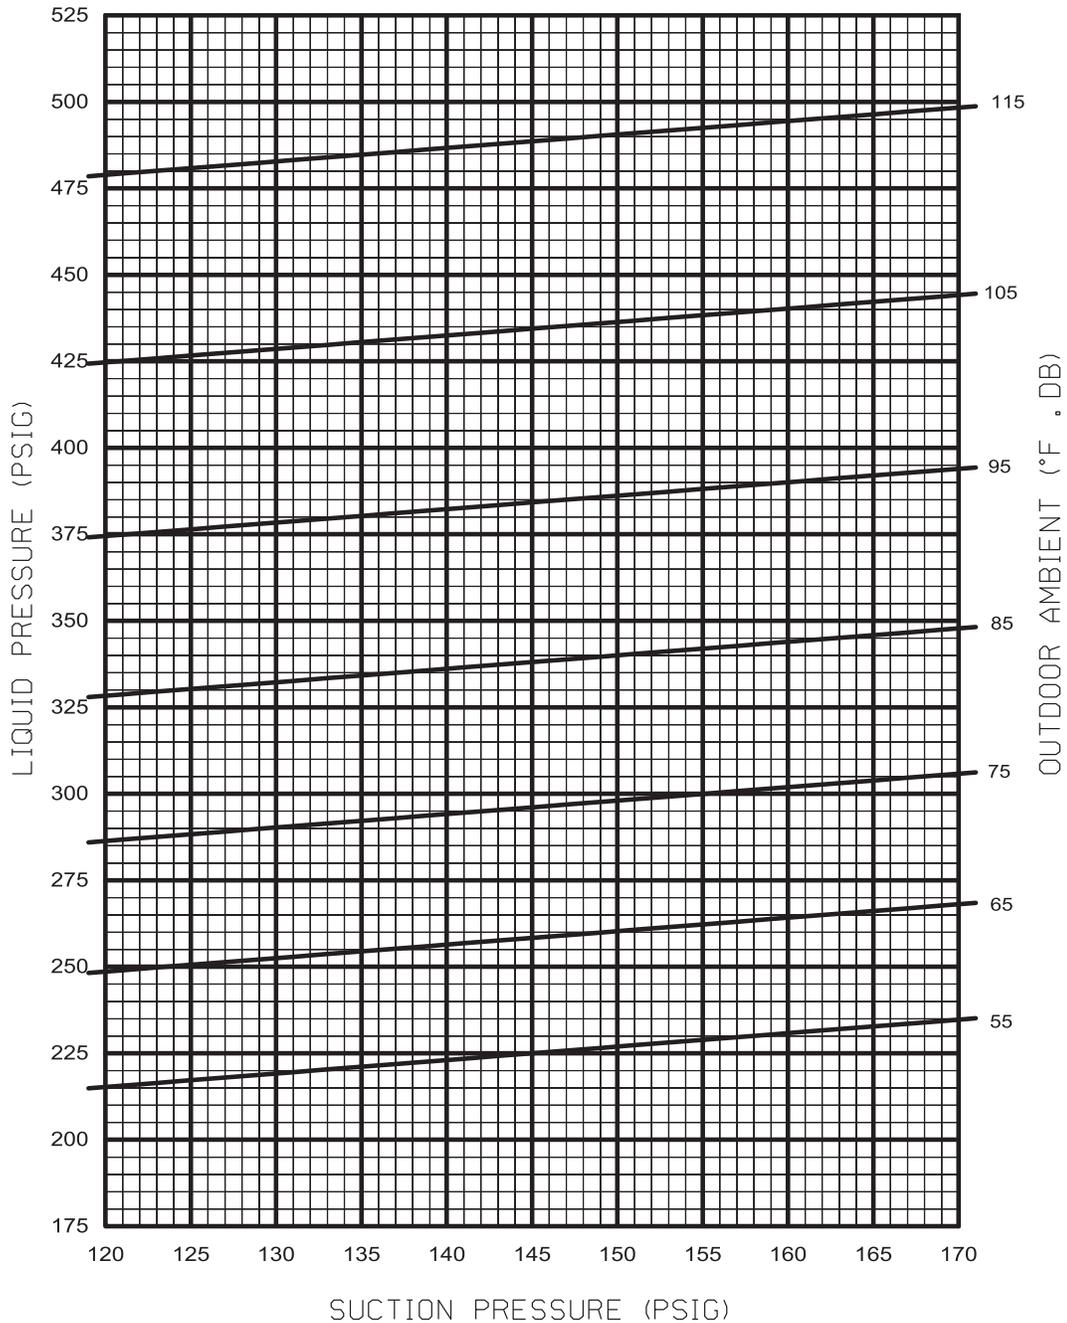


92-102259-04-00

5 TON AIR CONDITIONER - 14 SEER

SYSTEM CHARGE CHART - REFRIGERANT 410A 5 TON, 14 SEER

CAUTION: 1. RETURN AIR TEMPERATURE MUST BE WITHIN COMFORT CONDITIONS BEFORE FINAL REFRIGERANT CHECK!

- INSTRUCTIONS:**
1. MEASURE PRESSURE AT COMPRESSOR SUCTION AND LIQUID.
 2. MEASURE OUTDOOR AMBIENT TO UNIT.
 3. PLACE (X) ON CHART WHERE SUCTION AND LIQUID INTERSECT.
 4. IF (X) IS BELOW OUTDOOR AMBIENT LINE, ADD CHARGE AND REPEAT STEP 3.
 5. IF (X) IS ABOVE OUTDOOR AMBIENT LINE, RECOVER EXCESS CHARGE AND REPEAT STEP 3.

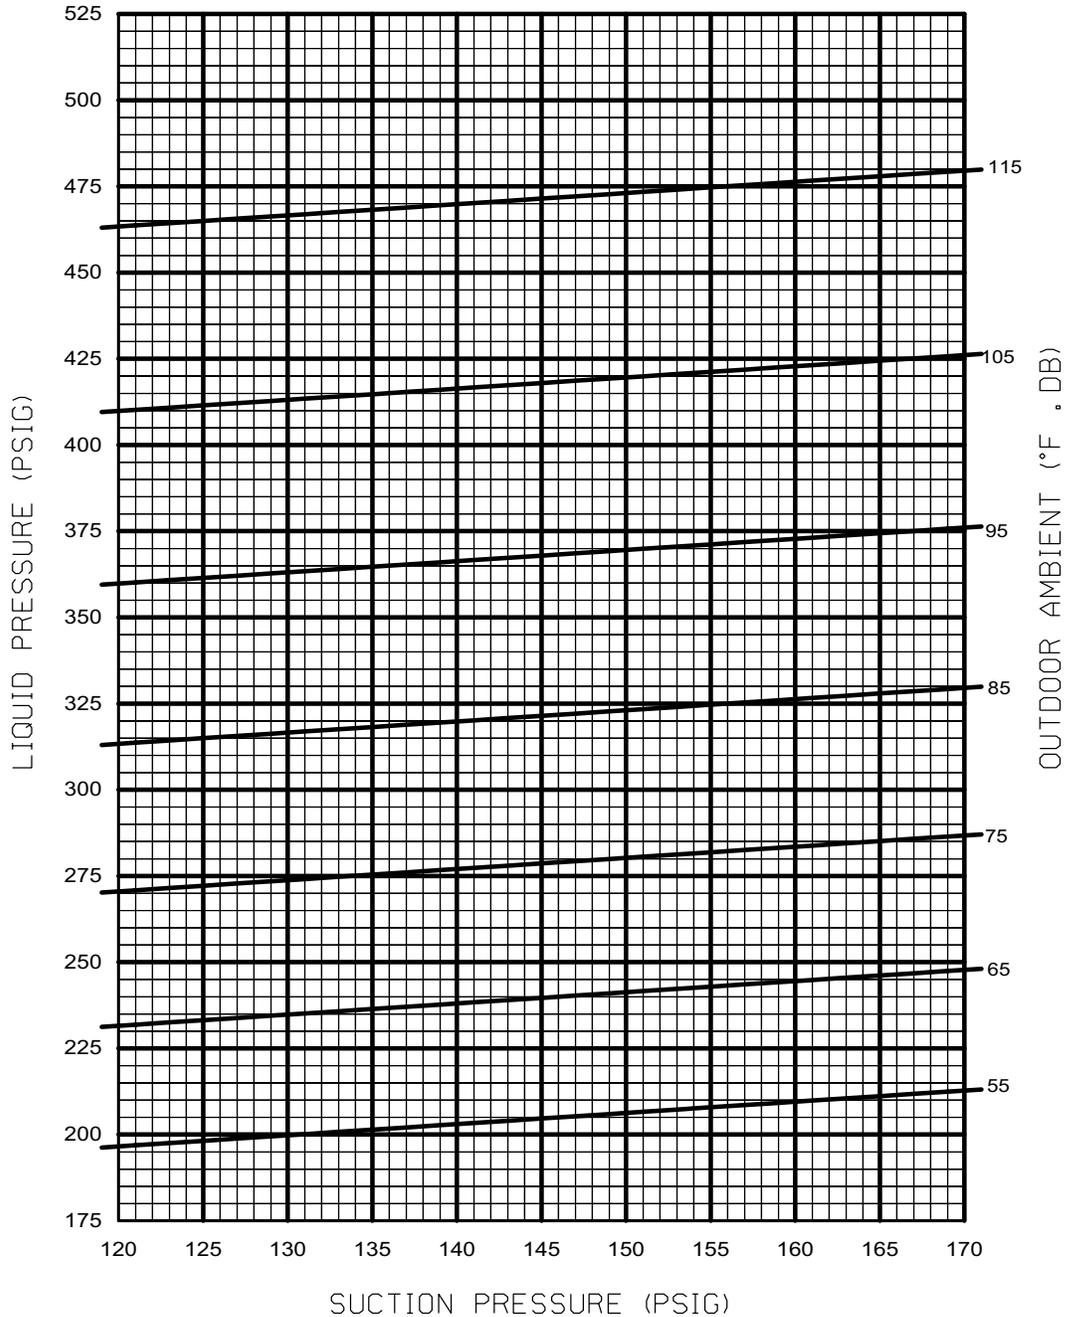

92-102259-05-00

TROUBLE SHOOTING CHART

▲ WARNING

DISCONNECT ALL POWER TO UNIT BEFORE SERVICING. CONTACTOR MAY BREAK ONLY ONE SIDE. FAILURE TO SHUT OFF POWER CAN CAUSE ELECTRICAL SHOCK RESULTING IN PERSONAL INJURY OR DEATH.

SYMPTOM	POSSIBLE CAUSE	REMEDY
Unit will not run	<ul style="list-style-type: none"> • Power off or loose electrical connection • Thermostat out of calibration-set too high • Defective contactor • Blown fuses • Transformer defective • High pressure control open (if provided) • Interconnecting low voltage wiring damaged 	<ul style="list-style-type: none"> • Check for correct voltage at compressor contactor in control box • Reset • Check for 24 volts at contactor coil - replace if contacts are open • Replace fuses • Check wiring-replace transformer • Reset-also see high head pressure remedy-The high pressure control opens at 610 PSIG • Replace thermostat wiring
Condenser fan runs, compressor doesn't	<ul style="list-style-type: none"> • Run capacitor defective (single phase only) • Start relay defective (single phase on;y) • Loose connection • Compressor stuck, grounded or open motor winding, open internal overload. • Low voltage condition • Low voltage condition 	<ul style="list-style-type: none"> • Replace • Replace • Check for correct voltage at compressor - check & tighten all connections • Wait at least 2 hours for overload to reset. If still open, replace the compressor. • At compressor terminals, voltage must be within 10% of rating plate volts when unit is operating • Add start kit components
Insufficient cooling	<ul style="list-style-type: none"> • Improperly sized unit • Improper airflow • Incorrect refrigerant charge • Air, non-condensibles or moisture in system • Incorrect voltage 	<ul style="list-style-type: none"> • Recalculate load • Check - should be approximately 400 CFM per ton. • Charge per procedure attached to unit service panel • Recover refrigerant, evacuate & recharge, add filter drier • At compressor terminals, voltage must be within 10% of rating plate volts when unit is operating.
Compressor short cycles	<ul style="list-style-type: none"> • Incorrect voltage • Defective overload protector • Refrigerant undercharge 	<ul style="list-style-type: none"> • At compressor terminals, voltage must be $\pm 10\%$ of nameplate marking when unit is operating. • Replace - check for correct voltage • Add refrigerant
Registers sweat	<ul style="list-style-type: none"> • Low evaporator airflow 	<ul style="list-style-type: none"> • Increase speed of blower or reduce restriction - replace air filter
High head-low vapor pressures	<ul style="list-style-type: none"> • Restriction in liquid line, expansion device or filter drier • Flow check piston size too small • Incorrect capillary tubes • TXV does not open 	<ul style="list-style-type: none"> • Remove or replace defective component • Change to correct size piston • Change coil assembly • Replace TXV
High head-high or normal vapor pressure - Cooling mode	<ul style="list-style-type: none"> • Dirty condenser coil • Refrigerant overcharge • Condenser fan not running • Air or non-condensibles in system 	<ul style="list-style-type: none"> • Clean coil • Correct system charge • Repair or replace • Recover refrigerant, evacuate & recharge
Low head-high vapor pressures	<ul style="list-style-type: none"> • Flow check piston size too large • Defective Compressor valves • Incorrect capillary tubes 	<ul style="list-style-type: none"> • Change to correct size piston • Replace compressor • Replace coil assembly
Low vapor - cool compressor - iced evaporator coil	<ul style="list-style-type: none"> • Low evaporator airflow • Operating below 65°F outdoors • Moisture in system • TXV limiting refrigerant flow 	<ul style="list-style-type: none"> • Increase speed of blower or reduce restriction - replace air filter • Add Low Ambient Kit • Recover refrigerant - evacuate & recharge - add filter drier • Replace TXV
High vapor pressure	<ul style="list-style-type: none"> • Excessive load • Defective compressor 	<ul style="list-style-type: none"> • Recheck load calculation • Replace
Fluctuating head & vapor pressures	<ul style="list-style-type: none"> • TXV hunting • Air or non-condensate in system 	<ul style="list-style-type: none"> • Check TXV bulb clamp - check air distribution on coil - replace TXV • Recover refrigerant, evacuate & recharge
Gurgle or pulsing noise at expansion device or liquid line	<ul style="list-style-type: none"> • Air or non-condensibles in system 	<ul style="list-style-type: none"> • Recover refrigerant, evacuate & recharge

