



PACKAGE AIR CONDITIONERS

FORM NO. A11-186 REV. 5
Supersedes Form No. A11-186 Rev. 4

Featuring Industry Standard R-410A Refrigerant

R-410A

RSNM- HIGH EFFICIENCY 13-SEER SERIES
NOMINAL SIZES 2-5 TONS [7-17.6 kW]

RSPM- SUPER HIGH EFFICIENCY 14-SEER SERIES
NOMINAL SIZES 2-5 TON [7-17.6 kW]




“Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR criteria. Ask your Contractor for details or visit www.energystar.gov.”



Unit Features & Benefits	3-6
Model Identification Options	7
General Data	
RSNM- Series	8-10
RSPM- Series	11-13
Performance Data	
RSNM- Cooling Series	14-16
RSPM- Cooling Series	17-20
Airflow Performance RSNM/RSPM- Series.....	21-24
Electrical Data	
RSNM- Series	25
RSPM- Series.....	26
Electric Heater Kits	27-30
Dimensional Data	31
Typical Installations	32
Accessories	33
Typical Wiring	34-39
Limited Warranty	40




UNIT FEATURES & BENEFITS—RSNM/RSPM- SERIES

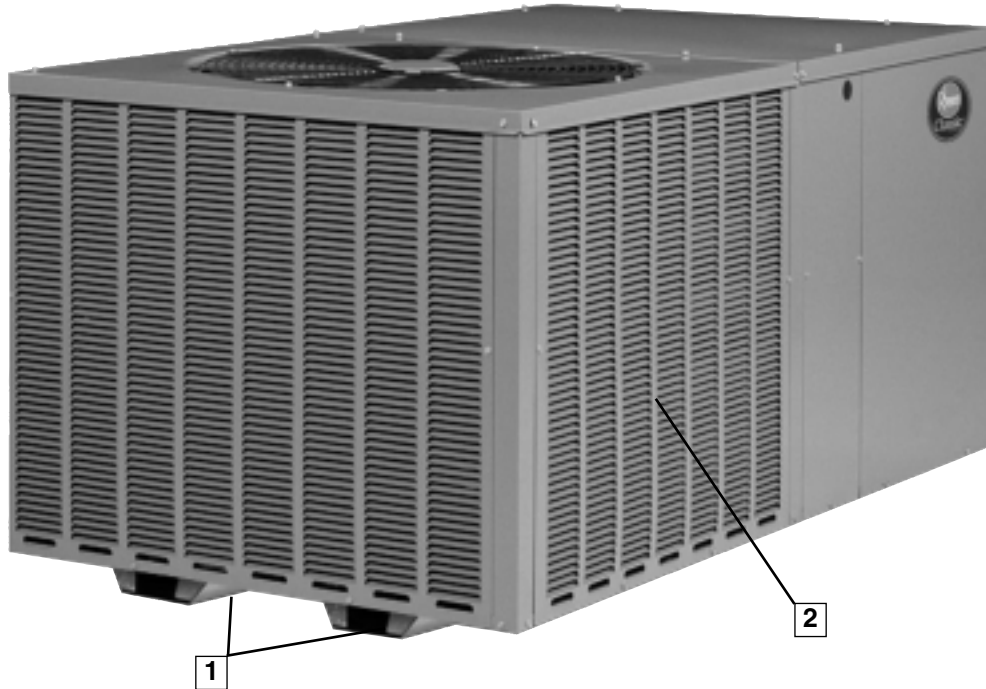


The RSNM/RSPM series of Package Air Conditioners are designed to be the most efficient, quickest to install, easiest to service, and most reliable units in the industry - while still maintaining an affordable price. This platform provides you with a full line of nominal capacities from 2 through 5 tons utilizing earth-friendly R-410A refrigerant. This unit is suitable for use in mobile homes, manufactured housing and conventionally constructed residential and commercial buildings where horizontally-ducted systems are preferred. RSNM models are 13 SEER, and RSPM Models are 14 SEER, each AHRI-certified.

As with all units offered by Rheem, we started our design process with input from the customer. From fan grille to the base rails, Rheem has combined 30 years worth of package unit design experience with input from Dealers to meet the latest application requirements.

Starting at the bottom, the base rails (1) allow for separation between the unit base and the ground level, protecting the base from ground moisture and providing air circulation around the unit. Constructed from sturdy 14-gauge G-90 sheet metal, the base rails also allow for easier maneuverability during installation.

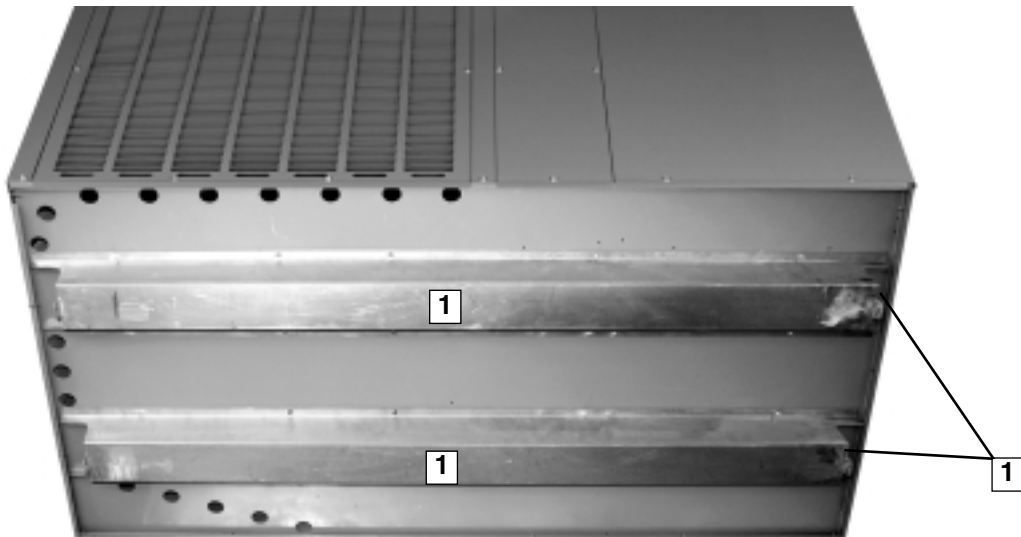

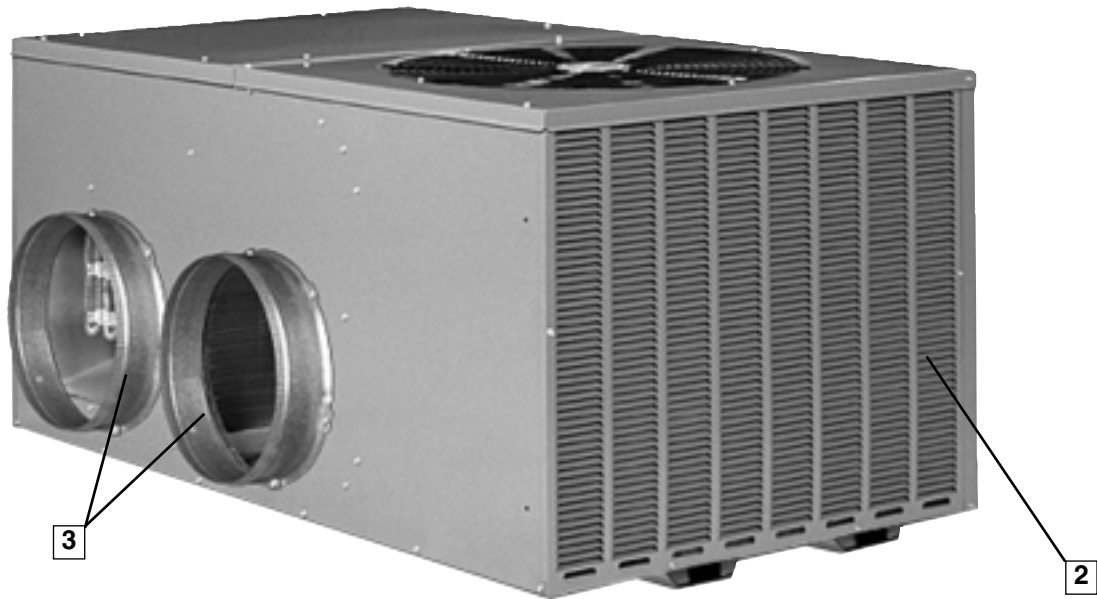



While other manufacturers have chosen to use pre-painted steel in their equipment, which exposes raw edges and invites rust and sharp edges, Rheem package equipment uses a powder-coat paint system, rated at 1000 hour salt spray per ASTM B117. The powder-coat process also greatly diminishes and dulls sharp edges, reducing the occurrence of cuts and torn clothes.

To provide flexibility in space-limited installations, the unit can be installed flush to the structure without blocking airflow over the outdoor coil or making any screws inaccessible for maintenance. Furthermore, the cabinet is a slim 33" wide. Full-louver coil protection (2) makes Rheem unique in the industry and also totally protects the outdoor coil from vandalism and weather extremes.

Two round 14" duct collar (3) are included with the unit, which makes attaching duct a snap. The collar is crimped around the leading edge, making it easier to install duct onto the collar. A metal bead around the circumference prevents the attached ducting from sliding off after installation.

Keeping service technicians in mind, Rheem takes pride providing easy access to internal components. The outdoor-section top cover (4) is easily removed to allow access to the scroll compressor (5), outdoor fan motor (6), and refrigerant tubing (7).

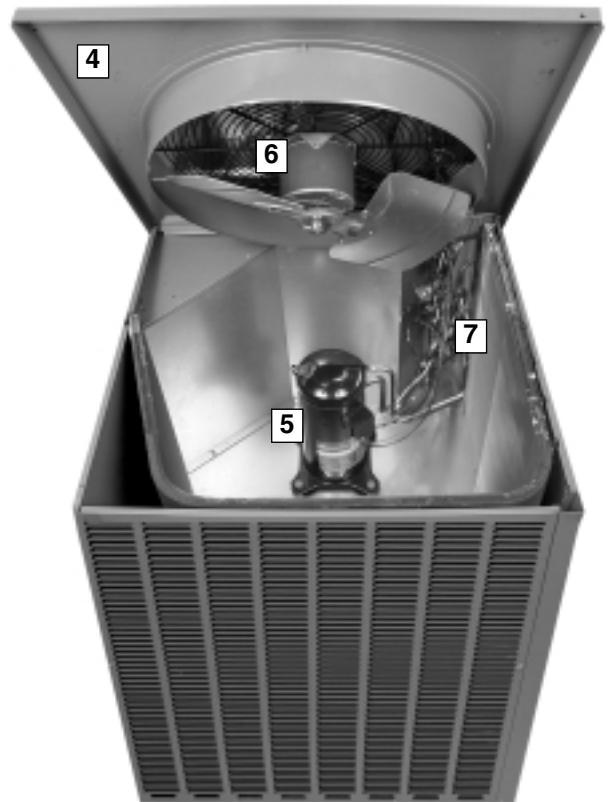


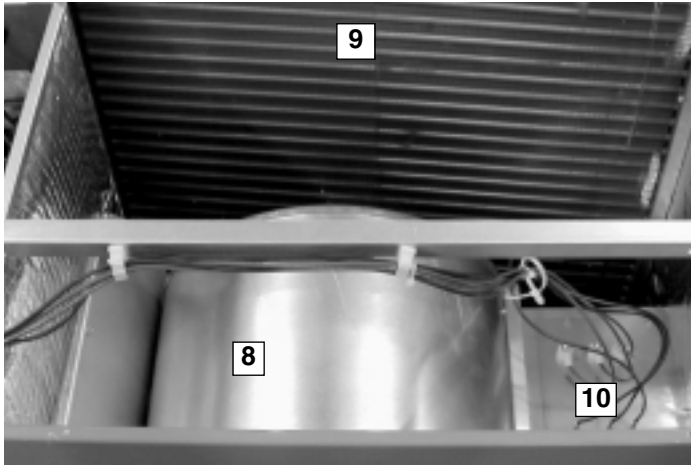


The indoor-section top cover also easily opens to access the removable blower housing and motor (8). This also gains total access to the indoor coil for cleaning and service (9).

The indoor motor and blower system will achieve nominal 400 CFM per ton up to a minimum of .8 inches of static pressure, which helps to eliminate customer dissatisfaction over poor airflow brought about by high-static duct designs.

Optional electric heat (10) can be specified as factory installed, or can be easily installed in the field, with either dual- or single-point power connections.

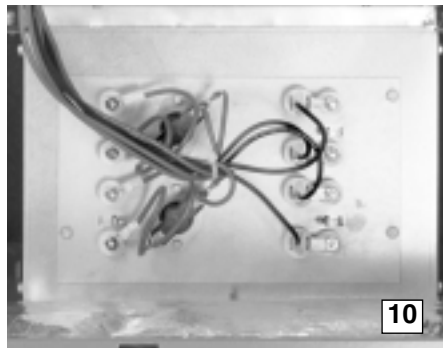


The controls are located in a large, easy-to-access control box (11), which provides plenty of space in which to troubleshoot. The transformer (12) is protected by an in-line fuse, which protects the transformer during a low-voltage electrical short. The low-voltage (13) and high-voltage (14) wiring connections are easily accessed and have ample room around which to maneuver. Troubleshooting is further aided with number- and color-coded wiring, which corresponds with the large, easy-to-read wiring diagram located on the inside of the control box access panel.

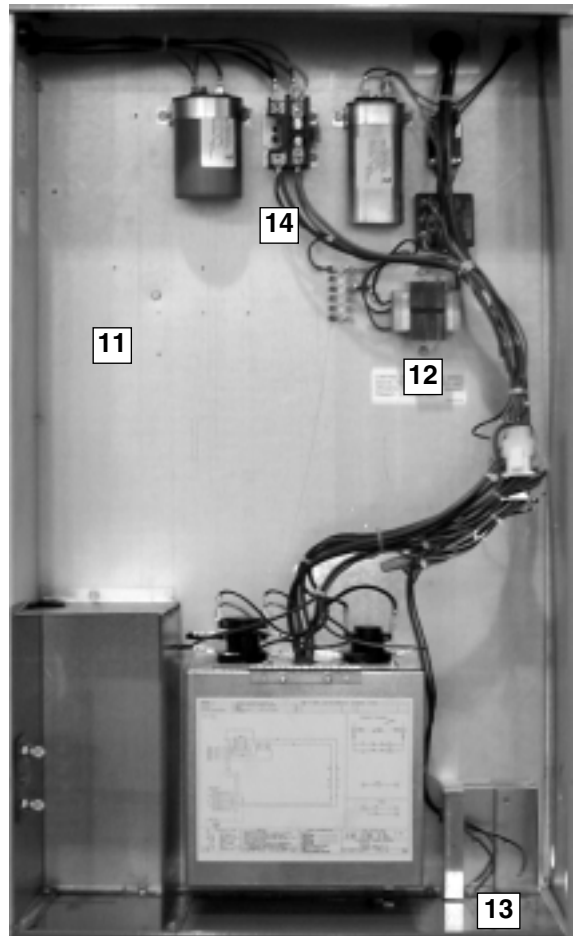



High and low refrigerant pressure can easily and accurately be measured using the two gauge ports (15) located inside the control box.



A small side panel grants access to a removable, sloped drain pan (16), which helps to ensure indoor air quality (IAQ) throughout the life of the unit. A 3/4" drain trap (17) assembly is provided for convenience.



"Patent 7,430,877"



Foil-faced insulation is securely glued and captured to the cabinet. On the base of the unit, closed-cell insulation is used to prevent moisture from being absorbed and help reduce mold content to provide better indoor air quality.

For reliability and long-lasting operation, Rheem uses 100% scroll compressor technology (18) on all package platforms. With over 12 years of history, the scroll compressor has proven to be reliable, efficient, and quiet during operation.





MODEL IDENTIFICATION—RSNM/RSPM- SERIES



R S N M — A 036 J K 010

Heating Capacity (Factory Installed)
 000 = No Resistance Heat
 005 = 05 KW Resistance Heat
 007 = 07 KW Resistance Heat
 010 = 10 KW Resistance Heat
 015 = 15 KW Resistance Heat
 020 = 20 KW Resistance Heat *

Drive Package
 K = Direct Drive

Electrical Designation
 J = 208-230V—1PH—60 Hz
 C = 208-230V—3PH—60 Hz

Nominal Cooling Capacity (BTUH) [kW]
 024 = 24,000 [7.03]
 030 = 30,000 [8.79]
 036 = 36,000 [10.55]
 042 = 42,000 [12.31]
 043 = 42,000 [12.31]
 048 = 48,000 [14.07]
 060 = 60,000 [17.59]

Future Technical Variations

Design Series
 M = R-410A

Efficiency Designation
 N = 13 SEER High Efficiency
 P = 14 SEER Super High Efficiency

Product Classification
 S = Package Air Conditioner

Tradebrand
 R = Rheem

Not available in 3 phase models.
 *Available in 3¹/₂, 4 and 5 ton models.

[] Designates Metric Conversions



NOMINAL SIZES 2-5 TONS [7-17.6 kW]

Model RSNM- Series	A024JK	A030JK	A036CK	A036JK
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	24,800 [7.27]	30,000 [8.79]	37,200 [10.9]	37,200 [10.9]
EER/SEER ²	11.3/13	11.5/13	11.3/13	11.3/13
Nominal CFM/AHRI Rated CFM [L/s]	800/800 [378/378]	1000/1000 [472/472]	1200/1200 [566/566]	1200/1200 [566/566]
AHRI Net Cooling Capacity Btu [kW]	23,800 [6.97]	28,800 [8.44]	35,800 [10.49]	35,800 [10.49]
Net Sensible Capacity Btu [kW]	18,400 [5.39]	22,200 [6.5]	27,300 [8]	27,300 [8]
Net Latent Capacity Btu [kW]	5,400 [1.58]	6,600 [1.93]	8,500 [2.49]	8,500 [2.49]
Net System Power kW	2.1	2.5	3.17	3.17
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³	76	76	76	76
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	10.44 [0.97]	12.64 [1.17]	12.65 [1.18]	12.65 [1.18]
Rows / FPI [FPcm]	1 / 20 [8]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]
Indoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	4.33 [0.4]	4.33 [0.4]	4.33 [0.4]	4.33 [0.4]
Rows / FPI [FPcm]	2 / 15 [6]	2 / 15 [6]	2 / 15 [6]	2 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm] ⁴	1/1 [25.4]	1/1 [25.4]	1/1 [25.4]	1/1 [25.4]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3400 [1604]	3400 [1604]	3400 [1604]	3400 [1604]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	875	875	875	875
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x9 [254x228.6]	1/10x9 [254x228.6]	1/10x9 [254x228.6]	1/10x9 [254x228.6]
Drive Type/No. Speeds	Direct/2	Direct/2	Direct/2	Direct/2
No. Motors	1	1	1	1
Motor HP	1/4	1/3	1/2	1/2
Motor RPM (Nominal)	1033	1080	1050	1050
Motor Frame Size	48	48	48	48
Filter—Type	Field Supplied	Field Supplied	Field Supplied	Field Supplied
Furnished	No	No	No	No
(No.) Size Recommended in. [mm]	(1)1x20x16 [25x508x406]	(1)1x20x20 [25x508x508]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]
Refrigerant Charge Oz. [g] (R-410A)	70 [1984]	78 [2211]	78 [2211]	78 [2211]
Weights				
Net Weight lbs. [kg]	304 [138]	306 [139]	309 [140]	309 [140]
Ship Weight lbs. [kg]	328 [149]	330 [150]	333 [151]	333 [151]

[] Designates Metric Conversions

NOTES:

- Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
- EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
- Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.
- Standard 3/4" PVC P-Trap provided.



NOMINAL SIZES 2-5 TONS [7-17.6 kW]

Model RSNM- Series	A042CK	A042JK	A048CK	A048JK
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	43,000 [12.6]	43,000 [12.6]	48,000 [14.06]	48,000 [14.06]
EER/SEER ²	11.1/13	11.1/13	11.3/13	11.3/13
Nominal CFM/AHRI Rated CFM [L/s]	1400/1400 [661/661]	1400/1400 [661/661]	1600/1550 [755/731]	1600/1550 [755/731]
AHRI Net Cooling Capacity Btu [kW]	41,500 [12.16]	41,500 [12.16]	46,000 [13.48]	46,000 [13.48]
Net Sensible Capacity Btu [kW]	31,500 [9.23]	31,500 [9.23]	35,500 [10.4]	35,500 [10.4]
Net Latent Capacity Btu [kW]	10,000 [2.93]	10,000 [2.93]	10,500 [3.08]	10,500 [3.08]
Net System Power kW	3.74	3.74	4.07	4.07
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³	76	76	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	12.65 [1.18]	12.65 [1.18]	16.54 [1.54]	16.54 [1.54]
Rows / FPI [FPcm]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]
Indoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.78 [0.54]	5.78 [0.54]	5.78 [0.54]	5.78 [0.54]
Rows / FPI [FPcm]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm] ⁴	1/1 [25.4]	1/1 [25.4]	1/1 [25.4]	1/1 [25.4]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3400 [1604]	3400 [1604]	4200 [1982]	4200 [1982]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	875	875	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/11x9 [279.4x228.6]	1/11x9 [279.4x228.6]	1/11x9 [279.4x228.6]	1/11x9 [279.4x228.6]
Drive Type/No. Speeds	Direct/2	Direct/2	Direct/2	Direct/2
No. Motors	1	1	1	1
Motor HP	1/2	1/2	3/4	3/4
Motor RPM (Nominal)	1075	1075	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type	Field Supplied	Field Supplied	Field Supplied	Field Supplied
Furnished	No	No	No	No
(No.) Size Recommended in. [mm]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]
Refrigerant Charge Oz. [g] (R-410A)	86 [2438]	86 [2438]	114 [3232]	114 [3232]
Weights				
Net Weight lbs. [kg]	333 [151]	333 [151]	349 [158]	349 [158]
Ship Weight lbs. [kg]	357 [162]	357 [162]	375 [170]	375 [170]

[] Designates Metric Conversions

NOTES:

1. Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
2. EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
3. Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.
4. Standard 3/4" PVC P-Trap provided.



NOMINAL SIZES 2-5 TON [7-17.6 kW]

Model RSNM- Series	A060CK	A060JK
Cooling Performance¹		
Gross Cooling Capacity Btu [kW]	63,000 [18.46]	63,000 [18.46]
EER/SEER ²	11.3/13	11.3/13
Nominal CFM/AHRI Rated CFM [L/s]	2000/1900 [944/897]	2000/1900 [944/897]
AHRI Net Cooling Capacity Btu [kW]	60,000 [17.58]	60,000 [17.58]
Net Sensible Capacity Btu [kW]	45,000 [13.18]	45,000 [13.18]
Net Latent Capacity Btu [kW]	15,000 [4.4]	15,000 [4.4]
Net System Power kW	5.31	5.31
Compressor		
No./Type	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³		
	78	78
Outdoor Coil—Fin Type		
	Louvered	Louvered
Tube Type	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.54 [1.54]	16.54 [1.54]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type		
	Louvered	Louvered
Tube Type	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.78 [0.54]	5.78 [0.54]
Rows / FPI [FPcm]	4 / 13 [5]	4 / 13 [5]
Refrigerant Control	TX Valves	TX Valves
Drain Connection No./Size in. [mm] ⁴	1/1 [25.4]	1/1 [25.4]
Outdoor Fan—Type		
	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1
CFM [L/s]	4000 [1888]	4000 [1888]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075
Indoor Fan—Type		
	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/11x9 [279.4x228.6]	1/11x9 [279.4x228.6]
Drive Type/No. Speeds	Direct/2	Direct/2
No. Motors	1	1
Motor HP	3/4	3/4
Motor RPM (Nominal)	1075	1075
Motor Frame Size	48	48
Filter—Type		
	Field Supplied	Field Supplied
Furnished	No	No
(No.) Size Recommended in. [mm]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]
Refrigerant Charge Oz. [g] (R-410A)		
	178 [5046]	178 [5046]
Weights		
Net Weight lbs. [kg]	364 [165]	364 [165]
Ship Weight lbs. [kg]	390 [177]	390 [177]

[] Designates Metric Conversions

NOTES:

1. Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
2. EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
3. Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.
4. Standard 3/4" PVC P-Trap provided.



NOMINAL SIZES 2-5 TON [7-17.6 kW]

Model RSPM- Series	A024JK	A030JK	A036CK	A036JK
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	25,200 [7.38]	30,400 [8.91]	37,600 [11.02]	37,600 [11.02]
EER/SEER ²	12.4/14	12.25/14	12.2/14	12.2/14
Nominal CFM/AHRI Rated CFM [L/s]	800/800 [378/378]	1000/1000 [472/472]	1200/1200 [566/566]	1200/1200 [566/566]
AHRI Net Cooling Capacity Btu [kW]	24,200 [7.09]	29,200 [8.56]	36,200 [10.61]	36,200 [10.61]
Net Sensible Capacity Btu [kW]	18,800 [5.51]	23,000 [6.74]	27,700 [8.12]	27,700 [8.12]
Net Latent Capacity Btu [kW]	5,400 [1.58]	6,200 [1.82]	8,500 [2.49]	8,500 [2.49]
Net System Power kW	1.95	2.38	2.97	2.97
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³	76	76	76	76
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	10.44 [0.97]	12.64 [1.17]	12.65 [1.18]	12.65 [1.18]
Rows / FPI [FPcm]	1 / 20 [8]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]
Indoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	4.33 [0.4]	4.33 [0.4]	4.33 [0.4]	4.33 [0.4]
Rows / FPI [FPcm]	2 / 15 [6]	2 / 15 [6]	2 / 15 [6]	2 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm] ⁴	1/1 [25.4]	1/1 [25.4]	1/1 [25.4]	1/1 [25.4]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3400 [1604]	3400 [1604]	3400 [1604]	3400 [1604]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	875	875	875	875
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x9 [254x228.6]	1/10x9 [254x228.6]	1/10x9 [254x228.6]	1/10x9 [254x228.6]
Drive Type/No. Speeds	Direct/2	Direct/2	Direct/2	Direct/2
No. Motors	1	1	1	1
Motor HP	1/4	1/3	1/2	1/2
Motor RPM (Nominal)	1050	1050	1050	1050
Motor Frame Size	48	48	48	48
Filter—Type	Field Supplied	Field Supplied	Field Supplied	Field Supplied
Furnished	No	No	No	No
(No.) Size Recommended in. [mm]	(1)1x20x16 [25x508x406]	(1)1x20x20 [25x508x508]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]
Refrigerant Charge Oz. [g] (R-410A)	70 [1984]	78 [2211]	78 [2211]	78 [2211]
Weights				
Net Weight lbs. [kg]	304 [138]	306 [139]	309 [140]	309 [140]
Ship Weight lbs. [kg]	328 [149]	330 [150]	333 [151]	333 [151]

[] Designates Metric Conversions

NOTES:

1. Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
2. EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
3. Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.
4. Standard 3/4" PVC P-Trap provided.



NOMINAL SIZES 2-5 TONS [7-17.6 kW]

Model RSPM- Series	A042CK	A042JK	A043CK	A043JK
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	43,500 [12.75]	43,500 [12.75]	43,000 [12.6]	43,000 [12.6]
EER/SEER ²	11.85/14	11.85/14	12/14	12/14
Nominal CFM/AHRI Rated CFM [L/s]	1400/1400 [661/661]	1400/1400 [661/661]	1400/1400 [661/661]	1400/1400 [661/661]
AHRI Net Cooling Capacity Btu [kW]	42,000 [12.31]	42,000 [12.31]	42,000 [12.31]	42,000 [12.31]
Net Sensible Capacity Btu [kW]	32,500 [9.52]	32,500 [9.52]	32,000 [9.38]	32,000 [9.38]
Net Latent Capacity Btu [kW]	9,500 [2.78]	9,500 [2.78]	10,000 [2.93]	10,000 [2.93]
Net System Power kW	3.53	3.53	3.5	3.5
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³	76	76	76	76
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	12.65 [1.18]	12.65 [1.18]	12.65 [1.18]	12.65 [1.18]
Rows / FPI [FPcm]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]
Indoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.78 [0.54]	5.78 [0.54]	5.78 [0.54]	5.78 [0.54]
Rows / FPI [FPcm]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm] ⁴	1/1 [25.4]	1/1 [25.4]	1/1 [25.4]	1/1 [25.4]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3400 [1604]	3400 [1604]	3400 [1604]	3400 [1604]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	875	875	850	850
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/11x9 [279.4x228.6]	1/11x9 [279.4x228.6]	1/11x9 [279x229]	1/11x9 [279x229]
Drive Type/No. Speeds	Direct/2	Direct/2	Direct/2	Direct/2
No. Motors	1	1	1	1
Motor HP	1/2	1/2	1/2	1/2
Motor RPM (Nominal)	1050	1050	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type	Field Supplied	Field Supplied	Field Supplied	Field Supplied
Furnished	No	No	No	No
(No.) Size Recommended in. [mm]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]
Refrigerant Charge Oz. [g] (R-410A)	86 [2438]	86 [2438]	86 [2438]	86 [2438]
Weights				
Net Weight lbs. [kg]	333 [151]	333 [151]	333 [151]	333 [151]
Ship Weight lbs. [kg]	357 [162]	357 [162]	357 [162]	357 [162]

[] Designates Metric Conversions

NOTES:

1. Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
2. EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
3. Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.
4. Standard 3/4" PVC P-Trap provided.



NOMINAL SIZES 2-5 TONS [7-17.6 kW]

Model RSPM- Series	A048CK	A048JK	A060CK	A060JK
Cooling Performance¹				
Gross Cooling Capacity Btu [kW]	49,000 [14.36]	49,000 [14.36]	64,000 [18.75]	64,000 [18.75]
EER/SEER ²	12.6/14	12.6/14	12.35/14	12.35/14
Nominal CFM/AHRI Rated CFM [L/s]	1600/1600 [755/755]	1600/1600 [755/755]	2000/1900 [944/897]	2000/1900 [944/897]
AHRI Net Cooling Capacity Btu [kW]	47,000 [13.77]	47,000 [13.77]	61,000 [17.87]	61,000 [17.87]
Net Sensible Capacity Btu [kW]	36,400 [10.67]	36,400 [10.67]	45,500 [13.33]	45,500 [13.33]
Net Latent Capacity Btu [kW]	10,600 [3.11]	10,600 [3.11]	15,500 [4.54]	15,500 [4.54]
Net System Power kW	3.61	3.61	4.94	4.94
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³				
	78	78	78	78
Outdoor Coil—Fin Type				
Tube Type	Louvered	Louvered	Louvered	Louvered
Tube Size in. [mm] OD	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.54 [1.54]	16.54 [1.54]	16.54 [1.54]	16.54 [1.54]
Rows / FPI [FPcm]	1 / 22 [9]	1 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type				
Tube Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.78 [0.54]	5.78 [0.54]	5.78 [0.54]	5.78 [0.54]
Rows / FPI [FPcm]	3 / 13 [5]	3 / 13 [5]	4 / 13 [5]	4 / 13 [5]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm] ⁴	1/1 [25.4]	1/1 [25.4]	1/1 [25.4]	1/1 [25.4]
Outdoor Fan—Type				
Propeller	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	4200 [1982]	4200 [1982]	4000 [1888]	4000 [1888]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type				
FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/11x9 [279.4x228.6]	1/11x9 [279.4x228.6]	1/11x9 [279.4x228.6]	1/11x9 [279.4x228.6]
Drive Type/No. Speeds	Direct/2	Direct/2	Direct/2	Direct/2
No. Motors	1	1	1	1
Motor HP	3/4	3/4	3/4	3/4
Motor RPM (Nominal)	1050	1050	1050	1050
Motor Frame Size	48	48	48	48
Filter—Type				
Field Supplied	Field Supplied	Field Supplied	Field Supplied	Field Supplied
Furnished	No	No	No	No
(No.) Size Recommended in. [mm]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]
Refrigerant Charge Oz. [g] (R-410A)				
	114 [3232]	114 [3232]	178 [5046]	178 [5046]
Weights				
Net Weight lbs. [kg]	349 [158]	349 [158]	364 [165]	364 [165]
Ship Weight lbs. [kg]	375 [170]	375 [170]	390 [177]	390 [177]

[] Designates Metric Conversions

NOTES:

1. Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
2. EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
3. Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.
4. Standard 3/4" PVC P-Trap provided.

SYSTEMS PERFORMANCE—RSNM- SERIES



GROSS SYSTEMS PERFORMANCE DATA—RSNM-A024

wbE		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
		CFM [L/s]	960 [453]	800 [378]	640 [302]	960 [453]	800 [378]	640 [302]	960 [453]	800 [378]	640 [302]
DR ①		.12	.08	.03	.12	.08	.03	.12	.08	.03	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	30.5 [8.94] 19.0 [5.57] 1.5	29.4 [8.62] 17.4 [5.10] 1.5	28.4 [8.32] 15.8 [4.63] 1.5	28.5 [8.35] 22.4 [6.56] 1.5	27.5 [8.06] 20.5 [6.01] 1.5	26.5 [7.77] 18.6 [5.45] 1.5	26.9 [7.88] 25.8 [7.56] 1.5	26.0 [7.62] 23.6 [6.92] 1.5	25.0 [7.33] 21.4 [6.27] 1.5
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	30.0 [8.79] 18.8 [5.51] 1.6	28.9 [8.47] 17.2 [5.04] 1.6	27.9 [8.18] 15.6 [4.57] 1.6	27.9 [8.18] 22.2 [6.51] 1.6	27.0 [7.91] 20.3 [5.95] 1.6	26.0 [7.62] 18.4 [5.39] 1.6	26.4 [7.74] 25.6 [7.50] 1.6	25.4 [7.44] 23.4 [6.86] 1.6	24.5 [7.18] 21.2 [6.21] 1.6
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	29.3 [8.59] 18.5 [5.42] 1.7	28.3 [8.29] 17.0 [4.98] 1.7	27.2 [7.97] 15.4 [4.51] 1.6	27.3 [8.00] 21.9 [6.42] 1.7	26.3 [7.71] 20.0 [5.86] 1.7	25.4 [7.44] 18.2 [5.33] 1.6	25.7 [7.53] 25.3 [7.41] 1.7	24.8 [7.27] 23.2 [6.80] 1.7	23.9 [7.00] 21.0 [6.15] 1.7
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	28.5 [8.35] 18.2 [5.33] 1.8	27.5 [8.06] 16.6 [4.86] 1.8	26.5 [7.77] 15.1 [4.43] 1.7	26.5 [7.77] 21.5 [6.30] 1.8	25.6 [7.50] 19.7 [5.77] 1.7	24.6 [7.21] 17.9 [5.25] 1.7	24.9 [7.30] 24.9 [7.30] 1.8	24.0 [7.03] 22.8 [6.68] 1.8	23.2 [6.80] 20.7 [6.07] 1.7
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	27.6 [8.09] 17.8 [5.22] 1.9	26.7 [7.83] 16.2 [4.75] 1.8	25.7 [7.53] 14.7 [4.31] 1.8	25.6 [7.50] 21.1 [6.18] 1.9	24.7 [7.24] 19.3 [5.66] 1.8	23.8 [6.98] 17.5 [5.13] 1.8	24.0 [7.03] 24.0 [7.03] 1.9	23.2 [6.80] 22.5 [6.59] 1.8	22.4 [6.56] 20.3 [5.95] 1.8
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	26.7 [7.83] 17.3 [5.07] 2.0	25.8 [7.56] 15.8 [4.63] 1.9	24.8 [7.27] 14.4 [4.22] 1.9	24.7 [7.24] 20.7 [6.07] 1.9	23.8 [6.98] 18.9 [5.54] 1.9	23.0 [6.74] 17.1 [5.01] 1.9	23.1 [6.77] 23.1 [6.77] 2.0	22.3 [6.54] 22.0 [6.45] 1.9	21.5 [6.30] 20.0 [5.86] 1.9
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	25.7 [7.53] 16.8 [4.92] 2.0	24.8 [7.27] 15.4 [4.51] 2.0	23.9 [7.00] 13.9 [4.07] 2.0	23.7 [6.95] 20.2 [5.92] 2.0	22.9 [6.71] 18.5 [5.42] 2.0	22.1 [6.48] 16.7 [4.89] 2.0	22.1 [6.48] 22.1 [6.48] 2.0	21.4 [6.27] 21.4 [6.27] 2.0	20.6 [6.04] 19.6 [5.74] 2.0
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	24.7 [7.24] 16.3 [4.78] 2.1	23.9 [7.00] 14.9 [4.37] 2.1	23.0 [6.74] 13.5 [3.96] 2.1	22.7 [6.65] 19.7 [5.77] 2.1	21.9 [6.42] 18.0 [5.28] 2.1	21.1 [6.18] 16.3 [4.78] 2.0	21.2 [6.21] 21.2 [6.21] 2.1	20.4 [5.98] 20.4 [5.98] 2.1	19.7 [5.77] 19.1 [5.60] 2.1
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	23.8 [6.98] 15.8 [4.63] 2.2	22.9 [6.71] 14.5 [4.25] 2.2	22.1 [6.48] 13.1 [3.84] 2.1	21.7 [6.36] 19.2 [5.63] 2.2	21.0 [6.15] 17.5 [5.13] 2.2	20.2 [5.92] 15.9 [4.66] 2.1	20.2 [5.92] 20.2 [5.92] 2.2	19.5 [5.71] 19.5 [5.71] 2.2	18.7 [5.48] 18.7 [5.48] 2.1

GROSS SYSTEMS PERFORMANCE DATA—RSNM-A030

wbE		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
		CFM [L/s]	1200 [566]	1000 [472]	800 [378]	1200 [566]	1000 [472]	800 [378]	1200 [566]	1000 [472]	800 [378]
DR ①		.15	.11	.07	.15	.11	.07	.15	.11	.07	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	37.8 [11.08] 23.3 [6.83] 2.0	36.5 [10.70] 21.3 [6.24] 2.0	35.1 [10.29] 19.3 [5.66] 1.9	34.9 [10.23] 27.2 [7.97] 1.9	33.7 [9.88] 24.9 [7.30] 1.9	32.5 [9.52] 22.5 [6.59] 1.8	33.4 [9.79] 31.6 [9.26] 2.0	32.2 [9.44] 28.9 [8.47] 2.0	31.1 [9.11] 26.2 [7.68] 1.9
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	37.0 [10.84] 23.1 [6.77] 2.1	35.7 [10.46] 21.2 [6.21] 2.0	34.4 [10.08] 19.2 [5.63] 2.0	34.2 [10.02] 27.0 [7.91] 2.0	33.0 [9.67] 24.7 [7.24] 1.9	31.8 [9.32] 22.4 [6.56] 1.9	32.6 [9.55] 31.6 [9.26] 2.1	31.5 [9.23] 28.8 [8.44] 2.0	30.3 [8.88] 26.1 [7.65] 2.0
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	36.1 [10.58] 22.7 [6.65] 2.2	34.8 [10.20] 20.8 [6.10] 2.1	33.5 [9.82] 18.9 [5.54] 2.1	33.2 [9.73] 26.6 [7.80] 2.1	32.0 [9.38] 24.4 [7.15] 2.0	30.9 [9.06] 22.1 [6.48] 2.0	31.7 [9.29] 31.1 [9.11] 2.2	30.6 [8.97] 28.4 [8.32] 2.1	29.4 [8.62] 25.8 [7.56] 2.1
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	35.0 [10.26] 22.2 [6.51] 2.2	33.8 [9.91] 20.3 [5.95] 2.2	32.5 [9.52] 18.4 [5.39] 2.2	32.1 [9.41] 26.1 [7.65] 2.1	31.0 [9.09] 23.9 [7.00] 2.1	29.9 [8.76] 21.6 [6.33] 2.1	30.6 [8.97] 30.4 [8.91] 2.2	29.5 [8.65] 27.9 [8.18] 2.2	28.4 [8.32] 25.3 [7.41] 2.2
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	33.9 [9.94] 21.6 [6.33] 2.3	32.7 [9.58] 19.8 [5.80] 2.3	31.5 [9.23] 17.9 [5.25] 2.2	31.0 [9.09] 25.5 [7.47] 2.2	29.9 [8.76] 23.3 [6.83] 2.2	28.8 [8.44] 21.1 [6.18] 2.1	29.5 [8.65] 29.5 [8.65] 2.3	28.4 [8.32] 27.4 [8.03] 2.3	27.4 [8.03] 24.8 [7.27] 2.2
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	32.7 [9.58] 21.0 [6.15] 2.4	31.6 [9.26] 19.2 [5.63] 2.4	30.4 [8.91] 17.4 [5.10] 2.3	29.9 [8.76] 24.9 [7.30] 2.3	28.8 [8.44] 22.8 [6.68] 2.3	27.8 [8.15] 20.6 [6.04] 2.2	28.3 [8.29] 28.3 [8.29] 2.4	27.3 [8.00] 26.8 [7.85] 2.4	26.3 [7.71] 24.3 [7.12] 2.3
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	31.7 [9.29] 20.5 [6.01] 2.5	30.5 [8.94] 18.7 [5.48] 2.4	29.4 [8.62] 17.0 [4.98] 2.4	28.8 [8.44] 24.4 [7.15] 2.4	27.8 [8.15] 22.3 [6.54] 2.3	26.8 [7.85] 20.2 [5.92] 2.3	27.3 [8.00] 27.3 [8.00] 2.5	26.3 [7.71] 26.3 [7.71] 2.4	25.4 [7.44] 23.9 [7.00] 2.4
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	30.7 [9.00] 20.1 [5.89] 2.6	29.6 [8.67] 18.4 [5.39] 2.5	28.5 [8.35] 16.7 [4.89] 2.5	27.8 [8.15] 24.0 [7.03] 2.5	26.9 [7.88] 22.0 [6.45] 2.4	25.9 [7.59] 19.9 [5.83] 2.4	26.3 [7.71] 26.3 [7.71] 2.6	25.4 [7.44] 25.4 [7.44] 2.5	24.5 [7.18] 23.6 [6.92] 2.5
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	29.9 [8.76] 20.0 [5.86] 2.6	28.9 [8.47] 18.3 [5.36] 2.6	27.8 [8.15] 16.6 [4.86] 2.6	27.1 [7.94] 23.9 [7.00] 2.5	26.1 [7.65] 21.9 [6.42] 2.5	25.2 [7.39] 19.8 [5.80] 2.5	25.5 [7.47] 25.5 [7.47] 2.6	24.6 [7.21] 24.6 [7.21] 2.6	23.7 [6.95] 23.5 [6.89] 2.6

DR —Depression ratio
dbE—Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power—KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions



SYSTEMS PERFORMANCE—RSNM- SERIES

GROSS SYSTEMS PERFORMANCE DATA—RSNM-A036

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		1440 [680]	1200 [566]	960 [453]	1440 [680]	1200 [566]	960 [453]	1440 [680]	1200 [566]	960 [453]	
DR ①		.14	.10	.06	.14	.10	.06	.14	.10	.06	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	45.6 [13.36] 28.7 [8.41] 2.4	44.0 [12.90] 26.2 [7.68] 2.3	42.4 [12.43] 23.8 [6.98] 2.3	42.9 [12.57] 33.8 [9.91] 2.3	41.4 [12.13] 30.9 [9.06] 2.3	39.9 [11.69] 28.1 [8.24] 2.2	40.2 [11.78] 38.5 [11.28] 2.3	38.8 [11.37] 35.3 [10.35] 2.3	37.4 [10.96] 32.0 [9.38] 2.3
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	44.8 [13.13] 28.0 [8.21] 2.5	43.2 [12.66] 25.6 [7.50] 2.5	41.6 [12.19] 23.2 [6.80] 2.4	42.1 [12.34] 33.2 [9.73] 2.4	40.6 [11.90] 30.4 [8.91] 2.4	39.2 [11.49] 27.5 [8.06] 2.4	39.4 [11.55] 38.1 [11.17] 2.5	38.0 [11.14] 34.7 [10.17] 2.4	36.6 [10.73] 31.5 [9.23] 2.4
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	43.7 [12.81] 27.4 [8.03] 2.6	42.2 [12.37] 25.0 [7.33] 2.6	40.6 [11.90] 22.7 [6.65] 2.5	41.1 [12.05] 32.6 [9.55] 2.6	39.6 [11.61] 29.8 [8.73] 2.5	38.2 [11.20] 27.0 [7.91] 2.5	38.3 [11.22] 37.5 [10.99] 2.6	37.0 [10.84] 34.1 [9.99] 2.5	35.6 [10.43] 30.9 [9.06] 2.5
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	42.5 [12.46] 26.8 [7.85] 2.7	41.0 [12.02] 24.5 [7.18] 2.7	39.5 [11.58] 22.2 [6.51] 2.7	39.8 [11.66] 31.9 [9.35] 2.7	38.4 [11.25] 29.2 [8.56] 2.6	37.0 [10.84] 26.5 [7.77] 2.6	37.1 [10.87] 36.6 [10.73] 2.7	35.8 [10.49] 33.5 [9.82] 2.7	34.5 [10.11] 30.4 [8.91] 2.6
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	41.2 [12.07] 26.2 [7.68] 2.9	39.7 [11.63] 23.9 [7.00] 2.8	38.3 [11.22] 21.7 [6.36] 2.8	38.5 [11.28] 31.3 [9.17] 2.8	37.2 [10.90] 28.7 [8.41] 2.8	35.8 [10.49] 26.0 [7.62] 2.7	35.8 [10.49] 35.8 [10.49] 2.8	34.5 [10.11] 33.1 [9.70] 2.8	33.3 [9.76] 29.9 [8.76] 2.7
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	39.8 [11.66] 25.6 [7.50] 3.0	38.4 [11.25] 23.4 [6.86] 2.9	37.0 [10.84] 21.2 [6.21] 2.9	37.1 [10.87] 30.8 [9.03] 2.9	35.8 [10.49] 28.1 [8.24] 2.9	34.5 [10.11] 25.5 [7.47] 2.8	34.4 [10.08] 34.4 [10.08] 3.0	33.2 [9.73] 32.5 [9.52] 2.9	32.0 [9.38] 29.5 [8.65] 2.9
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	38.4 [11.25] 25.0 [7.33] 3.1	37.1 [10.87] 22.9 [6.71] 3.1	35.7 [10.46] 20.8 [6.10] 3.0	35.8 [10.49] 30.2 [8.85] 3.1	34.5 [10.11] 27.6 [8.09] 3.0	33.3 [9.76] 25.0 [7.33] 3.0	33.0 [9.67] 33.0 [9.67] 3.1	31.9 [9.35] 31.9 [9.35] 3.0	30.7 [9.00] 29.0 [8.50] 3.0
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	37.1 [10.87] 24.5 [7.18] 3.2	35.8 [10.49] 22.4 [6.56] 3.2	34.5 [10.11] 20.3 [5.95] 3.1	34.5 [10.11] 29.7 [8.70] 3.2	33.3 [9.76] 27.1 [7.94] 3.1	32.1 [9.41] 24.6 [7.21] 3.1	31.7 [9.29] 31.7 [9.29] 3.2	30.6 [8.97] 30.6 [8.97] 3.1	29.5 [8.65] 28.5 [8.35] 3.1
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	36.0 [10.55] 24.0 [7.03] 3.4	34.7 [10.17] 21.9 [6.42] 3.3	33.5 [9.82] 19.9 [5.83] 3.2	33.3 [9.76] 29.1 [8.53] 3.3	32.2 [9.44] 26.7 [7.83] 3.2	31.0 [9.09] 24.2 [7.09] 3.2	30.6 [8.97] 30.6 [8.97] 3.3	29.5 [8.65] 29.5 [8.65] 3.3	28.4 [8.32] 28.1 [8.24] 3.2

GROSS SYSTEMS PERFORMANCE DATA—RSNM-A042

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		1680 [793]	1400 [661]	1120 [529]	1680 [793]	1400 [661]	1120 [529]	1680 [793]	1400 [661]	1120 [529]	
DR ①		.15	.11	.07	.15	.11	.07	.15	.11	.07	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	52.7 [15.44] 32.8 [9.61] 2.7	50.9 [14.92] 30.0 [8.79] 2.7	49.0 [14.36] 27.2 [7.97] 2.6	50.0 [14.65] 39.1 [11.46] 2.7	48.2 [14.13] 35.7 [10.46] 2.6	46.5 [13.63] 32.4 [9.50] 2.6	46.4 [13.60] 44.0 [12.90] 2.7	44.8 [13.13] 40.4 [11.84] 2.6	43.2 [12.66] 36.6 [10.73] 2.6
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	51.8 [15.18] 32.0 [9.38] 2.9	50.0 [14.65] 29.3 [8.59] 2.8	48.2 [14.13] 26.5 [7.77] 2.8	49.0 [14.36] 38.3 [11.22] 2.8	47.3 [13.86] 35.0 [10.26] 2.8	45.6 [13.36] 31.7 [9.29] 2.7	45.5 [13.33] 43.6 [12.78] 2.9	43.9 [12.87] 39.7 [11.63] 2.8	42.3 [12.40] 36.0 [10.55] 2.8
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	50.5 [14.80] 31.3 [9.17] 3.0	48.8 [14.30] 28.6 [8.38] 3.0	47.0 [13.77] 25.9 [7.59] 2.9	47.8 [14.01] 37.6 [11.02] 3.0	46.1 [13.51] 34.4 [10.08] 2.9	44.4 [13.01] 31.1 [9.11] 2.9	44.2 [12.95] 42.9 [12.57] 3.0	42.7 [12.51] 39.0 [11.43] 3.0	41.1 [12.05] 35.4 [10.37] 2.9
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	49.1 [14.39] 30.6 [8.97] 3.2	47.3 [13.86] 28.0 [8.21] 3.2	45.6 [13.36] 25.4 [7.44] 3.1	46.3 [13.57] 36.9 [10.81] 3.2	44.7 [13.10] 33.7 [9.88] 3.1	43.0 [12.60] 30.6 [8.97] 3.0	42.8 [12.54] 41.9 [12.28] 3.2	41.3 [12.10] 38.4 [11.25] 3.1	39.8 [11.66] 34.8 [10.20] 3.1
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	47.5 [13.92] 30.0 [8.79] 3.4	45.8 [13.42] 27.4 [8.03] 3.3	44.1 [12.92] 24.8 [7.27] 3.3	44.7 [13.10] 36.2 [10.61] 3.3	43.1 [12.63] 33.1 [9.70] 3.3	41.6 [12.19] 30.0 [8.79] 3.2	41.2 [12.07] 41.2 [12.07] 3.3	39.7 [11.63] 37.8 [11.08] 3.3	38.3 [11.22] 34.3 [10.05] 3.2
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	45.9 [13.45] 29.3 [8.59] 3.5	44.3 [12.98] 26.8 [7.85] 3.5	42.7 [12.51] 24.3 [7.12] 3.4	43.1 [12.63] 35.6 [10.43] 3.5	41.6 [12.19] 32.6 [9.55] 3.4	40.1 [11.75] 29.5 [8.65] 3.4	39.6 [11.61] 39.6 [11.61] 3.5	38.2 [11.20] 37.2 [10.90] 3.4	36.8 [10.79] 33.8 [9.91] 3.4
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	44.4 [13.01] 28.7 [8.41] 3.7	42.9 [12.57] 26.3 [7.71] 3.6	41.3 [12.10] 23.8 [6.98] 3.6	41.7 [12.22] 35.0 [10.26] 3.6	40.2 [11.78] 32.0 [9.38] 3.6	38.8 [11.37] 29.0 [8.50] 3.5	38.2 [11.20] 38.2 [11.20] 3.7	36.8 [10.79] 36.7 [10.76] 3.6	35.5 [10.40] 33.3 [9.76] 3.5
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	43.3 [12.69] 28.1 [8.24] 3.9	41.7 [12.22] 25.7 [7.53] 3.8	40.2 [11.78] 23.3 [6.83] 3.7	40.5 [11.87] 34.4 [10.08] 3.8	39.1 [11.46] 31.5 [9.23] 3.7	37.7 [11.05] 28.5 [8.35] 3.7	37.0 [10.84] 37.0 [10.84] 3.8	35.7 [10.46] 35.7 [10.46] 3.8	34.4 [10.08] 32.8 [9.61] 3.7
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	42.4 [12.43] 27.5 [8.06] 4.0	40.9 [11.99] 25.2 [7.39] 3.9	39.4 [11.55] 22.8 [6.68] 3.9	39.7 [11.63] 33.8 [9.91] 4.0	38.3 [11.22] 30.9 [9.06] 3.9	36.9 [10.81] 28.0 [8.21] 3.8	36.1 [10.58] 36.1 [10.58] 4.0	34.9 [10.23] 34.9 [10.23] 3.9	33.6 [9.85] 32.3 [9.47] 3.9

DR —Depression ratio
dbE—Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power—KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions

SYSTEMS PERFORMANCE—RSNM- SERIES



GROSS SYSTEMS PERFORMANCE DATA—RSNM-A048

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		1860 [878]	1550 [732]	1240 [585]	1860 [878]	1550 [732]	1240 [585]	1860 [878]	1550 [732]	1240 [585]	
DR ①		.12	.08	.03	.12	.08	.03	.12	.08	.03	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	60.4 [17.70] 36.5 [10.70] 2.9	58.3 [17.09] 33.4 [9.79] 2.9	56.2 [16.47] 30.3 [8.88] 2.8	56.4 [16.53] 44.0 [12.90] 2.9	54.4 [15.94] 40.2 [11.78] 2.9	52.4 [15.36] 36.5 [10.70] 2.8	53.2 [15.59] 50.0 [14.65] 2.9	51.3 [15.03] 45.8 [13.42] 2.9	49.5 [14.51] 41.6 [12.19] 2.8
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	58.5 [17.14] 35.6 [10.43] 3.1	56.4 [16.53] 32.6 [9.55] 3.0	54.4 [15.94] 29.5 [8.65] 3.0	54.4 [15.94] 43.0 [12.60] 3.1	52.5 [15.39] 39.4 [11.55] 3.0	50.6 [14.83] 35.7 [10.46] 3.0	51.2 [15.01] 49.3 [14.45] 3.1	49.4 [14.48] 45.0 [13.19] 3.0	47.6 [13.95] 40.8 [11.96] 3.0
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	56.8 [16.65] 34.8 [10.20] 3.2	54.8 [16.06] 31.9 [9.35] 3.2	52.8 [15.47] 28.9 [8.47] 3.1	52.7 [15.44] 42.2 [12.37] 3.2	50.9 [14.92] 38.6 [11.31] 3.2	49.0 [14.36] 35.0 [10.26] 3.1	49.5 [14.51] 48.5 [14.21] 3.2	47.8 [14.01] 44.3 [12.98] 3.2	46.0 [13.48] 40.1 [11.75] 3.1
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	55.2 [16.18] 34.1 [9.99] 3.4	53.3 [15.62] 31.2 [9.14] 3.3	51.3 [15.03] 28.3 [8.29] 3.3	51.2 [15.01] 41.6 [12.19] 3.4	49.4 [14.48] 38.0 [11.14] 3.3	47.6 [13.95] 34.5 [10.11] 3.3	48.0 [14.07] 47.5 [13.92] 3.4	46.3 [13.57] 43.6 [12.78] 3.3	44.6 [13.07] 39.6 [11.61] 3.3
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	53.7 [15.74] 33.5 [9.82] 3.6	51.8 [15.18] 30.7 [9.00] 3.5	50.0 [14.65] 27.8 [8.15] 3.4	49.7 [14.57] 40.9 [11.99] 3.6	47.9 [14.04] 37.4 [10.96] 3.5	46.2 [13.54] 34.0 [9.96] 3.4	46.5 [13.63] 46.5 [13.63] 3.6	44.9 [13.16] 43.1 [12.63] 3.5	43.2 [12.66] 39.0 [11.43] 3.4
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	52.3 [15.33] 32.9 [9.64] 3.7	50.4 [14.77] 30.1 [8.82] 3.7	48.6 [14.24] 27.3 [8.00] 3.6	48.2 [14.13] 40.3 [11.81] 3.7	46.6 [13.66] 36.9 [10.81] 3.7	44.9 [13.16] 33.4 [9.79] 3.6	45.0 [13.19] 45.0 [13.19] 3.7	43.5 [12.75] 42.5 [12.46] 3.7	41.9 [12.28] 38.5 [11.28] 3.6
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	50.8 [14.89] 32.2 [9.44] 3.9	49.0 [14.36] 29.5 [8.65] 3.8	47.2 [13.83] 26.7 [7.83] 3.8	46.8 [13.72] 39.6 [11.61] 3.9	45.1 [13.22] 36.2 [10.61] 3.8	43.5 [12.75] 32.9 [9.64] 3.7	43.6 [12.78] 43.6 [12.78] 3.9	42.0 [12.31] 41.9 [12.28] 3.8	40.5 [11.87] 38.0 [11.14] 3.7
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	49.2 [14.42] 31.4 [9.20] 4.0	47.5 [13.92] 28.7 [8.41] 4.0	45.8 [13.42] 26.1 [7.65] 3.9	45.2 [13.25] 38.8 [11.37] 4.0	43.6 [12.78] 35.5 [10.40] 4.0	42.0 [12.31] 32.2 [9.44] 3.9	42.0 [12.31] 42.0 [12.31] 4.0	40.5 [11.87] 40.5 [11.87] 4.0	39.1 [11.46] 37.3 [10.93] 3.9
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	47.5 [13.92] 30.5 [8.94] 4.2	45.8 [13.42] 27.9 [8.18] 4.1	44.2 [12.95] 25.3 [7.41] 4.1	43.5 [12.75] 37.9 [11.11] 4.2	41.9 [12.28] 34.7 [10.17] 4.1	40.4 [11.84] 31.4 [9.20] 4.1	40.3 [11.81] 40.3 [11.81] 4.2	38.9 [11.40] 38.9 [11.40] 4.1	37.4 [10.96] 36.5 [10.70] 4.1

GROSS SYSTEMS PERFORMANCE DATA—RSNM-A060

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		2280 [1076]	1900 [897]	1520 [717]	2280 [1076]	1900 [897]	1520 [717]	2280 [1076]	1900 [897]	1520 [717]	
DR ①		.10	.07	.03	.10	.07	.03	.10	.07	.03	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	77.1 [22.60] 48.5 [14.21] 3.7	74.4 [21.80] 44.4 [13.01] 3.7	71.7 [21.01] 40.2 [11.78] 3.6	73.9 [21.66] 57.1 [16.73] 3.7	71.3 [20.90] 52.2 [15.30] 3.6	68.7 [20.13] 47.4 [13.89] 3.5	71.2 [20.87] 64.9 [19.02] 3.7	68.7 [20.13] 59.4 [17.41] 3.6	66.2 [19.40] 53.8 [15.77] 3.5
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	74.6 [21.86] 46.7 [13.69] 3.9	72.0 [21.10] 42.7 [12.51] 3.9	69.4 [20.34] 38.7 [11.34] 3.8	71.4 [20.93] 55.2 [16.18] 3.9	68.9 [20.19] 50.5 [14.80] 3.8	66.4 [19.46] 45.8 [13.42] 3.7	68.7 [20.13] 63.0 [18.46] 3.9	66.3 [19.43] 57.6 [16.88] 3.8	63.9 [18.73] 52.3 [15.33] 3.7
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	72.4 [21.22] 45.4 [13.31] 4.2	69.8 [20.46] 41.5 [12.16] 4.1	67.3 [19.72] 37.6 [11.02] 4.0	69.2 [20.28] 54.0 [15.83] 4.1	66.7 [19.55] 49.3 [14.45] 4.0	64.3 [18.84] 44.7 [13.10] 4.0	66.5 [19.49] 61.7 [18.08] 4.1	64.2 [18.82] 56.5 [16.56] 4.0	61.8 [18.11] 51.2 [15.01] 4.0
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	70.3 [20.60] 44.5 [13.04] 4.4	67.9 [19.90] 40.7 [11.93] 4.3	65.4 [19.17] 36.9 [10.81] 4.2	67.1 [19.67] 53.1 [15.56] 4.3	64.8 [18.99] 48.5 [14.21] 4.2	62.4 [18.29] 44.0 [12.90] 4.2	64.5 [18.90] 60.8 [17.82] 4.3	62.2 [18.23] 55.6 [16.29] 4.2	59.9 [17.55] 50.5 [14.80] 4.2
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	68.4 [20.05] 43.8 [12.84] 4.6	66.0 [19.34] 40.1 [11.75] 4.5	63.6 [18.64] 36.3 [10.64] 4.4	65.2 [19.11] 52.4 [15.36] 4.5	62.9 [18.43] 47.9 [14.04] 4.4	60.6 [17.76] 43.4 [12.72] 4.4	62.5 [18.32] 60.2 [17.64] 4.5	60.3 [17.67] 55.0 [16.12] 4.5	58.1 [17.03] 49.9 [14.62] 4.4
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	66.5 [19.49] 43.1 [12.63] 4.8	64.2 [18.82] 39.4 [11.55] 4.7	61.8 [18.11] 35.8 [10.49] 4.7	63.3 [18.55] 51.7 [15.15] 4.8	61.1 [17.91] 47.3 [13.86] 4.7	58.8 [17.23] 42.9 [12.57] 4.6	60.6 [17.76] 59.5 [17.44] 4.7	58.5 [17.14] 54.4 [15.94] 4.7	56.4 [16.53] 49.3 [14.45] 4.6
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	64.5 [18.90] 42.3 [12.40] 5.0	62.3 [18.26] 38.7 [11.34] 5.0	60.0 [17.58] 35.1 [10.29] 4.9	61.3 [17.97] 50.9 [14.92] 5.0	59.2 [17.35] 46.6 [13.66] 4.9	57.0 [16.71] 42.2 [12.37] 4.8	58.6 [17.17] 58.6 [17.17] 5.0	56.6 [16.59] 53.7 [15.74] 4.9	54.5 [15.97] 48.7 [14.27] 4.8
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	62.4 [18.29] 41.2 [12.07] 5.3	60.2 [17.64] 37.7 [11.05] 5.2	58.0 [17.00] 34.1 [9.99] 5.1	59.2 [17.35] 49.8 [14.59] 5.2	57.1 [16.73] 45.5 [13.33] 5.1	55.1 [16.15] 41.3 [12.10] 5.0	56.5 [16.56] 56.5 [16.56] 5.2	54.6 [16.00] 52.6 [15.42] 5.1	52.6 [15.42] 47.7 [13.98] 5.0
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	60.1 [17.61] 39.5 [11.58] 5.5	58.0 [17.00] 36.1 [10.58] 5.4	55.9 [16.38] 32.8 [9.61] 5.3	56.9 [16.68] 48.1 [14.10] 5.4	54.9 [16.09] 44.0 [12.90] 5.3	52.9 [15.50] 39.9 [11.69] 5.2	54.2 [15.88] 54.2 [15.88] 5.4	52.3 [15.33] 51.1 [14.98] 5.3	50.4 [14.77] 46.3 [13.57] 5.2

DR —Depression ratio
dbE—Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power—KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions

SYSTEMS PERFORMANCE—RSPM- SERIES



GROSS SYSTEMS PERFORMANCE DATA—RSPM-A036

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		1440 [680]	1200 [566]	960 [453]	1440 [680]	1200 [566]	960 [453]	1440 [680]	1200 [566]	960 [453]	
DR ①		.12	.09	.04	.12	.09	.04	.12	.09	.04	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	34.5 [10.11] 21.1 [6.18] 2.1	33.3 [9.76] 19.3 [5.66] 2.0	32.0 [9.38] 17.5 [5.13] 2.0	31.6 [9.26] 26.6 [7.80] 2.1	30.5 [8.94] 24.3 [7.12] 2.0	29.4 [8.62] 22.1 [6.48] 2.0	29.1 [8.53] 29.1 [8.53] 2.0	28.1 [8.24] 28.1 [8.24] 2.0	27.1 [7.94] 26.1 [7.65] 2.0
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	43.1 [12.63] 26.6 [7.80] 2.2	41.6 [12.19] 24.3 [7.12] 2.2	40.1 [11.75] 22.0 [6.45] 2.1	40.3 [11.81] 32.1 [9.41] 2.2	38.9 [11.40] 29.3 [8.59] 2.2	37.5 [10.99] 26.6 [7.80] 2.1	37.8 [11.08] 37.8 [11.08] 2.2	36.4 [10.67] 36.4 [10.67] 2.1	35.1 [10.29] 30.6 [8.97] 2.1
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	46.1 [13.51] 28.6 [8.38] 2.3	44.5 [13.04] 26.2 [7.68] 2.3	42.9 [12.57] 23.7 [6.95] 2.3	43.3 [12.69] 34.1 [9.99] 2.3	41.8 [12.25] 31.2 [9.14] 2.3	40.3 [11.81] 28.3 [8.29] 2.3	40.8 [11.96] 40.8 [11.96] 2.3	39.4 [11.55] 39.4 [11.55] 2.3	37.9 [11.11] 32.3 [9.47] 2.2
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	45.1 [13.22] 28.2 [8.26] 2.5	43.6 [12.78] 25.8 [7.56] 2.4	42.0 [12.31] 23.4 [6.86] 2.4	42.3 [12.40] 33.7 [9.88] 2.5	40.8 [11.96] 30.8 [9.03] 2.4	39.4 [11.55] 27.9 [8.18] 2.4	39.8 [11.66] 39.8 [11.66] 2.5	38.4 [11.25] 38.4 [11.25] 2.4	37.0 [10.84] 31.9 [9.35] 2.4
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	41.7 [12.22] 26.3 [7.71] 2.6	40.3 [11.81] 24.0 [7.03] 2.6	38.8 [11.37] 21.8 [6.39] 2.5	38.9 [11.40] 31.8 [9.32] 2.6	37.6 [11.02] 29.1 [8.53] 2.6	36.2 [10.61] 26.4 [7.74] 2.5	36.4 [10.67] 36.4 [10.67] 2.6	35.1 [10.29] 35.1 [10.29] 2.5	33.8 [9.91] 30.4 [8.91] 2.5
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	37.6 [11.02] 23.9 [7.00] 2.8	36.3 [10.64] 21.9 [6.42] 2.7	34.9 [10.23] 19.8 [5.80] 2.7	34.8 [10.20] 29.4 [8.62] 2.7	33.5 [9.82] 26.9 [7.88] 2.7	32.3 [9.47] 24.4 [7.15] 2.7	32.2 [9.44] 32.2 [9.44] 2.7	31.1 [9.11] 31.1 [9.11] 2.7	30.0 [8.79] 28.4 [8.32] 2.6
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	34.3 [10.05] 22.1 [6.48] 2.9	33.1 [9.70] 20.2 [5.92] 2.8	31.9 [9.35] 18.3 [5.36] 2.8	31.5 [9.23] 27.6 [8.09] 2.9	30.4 [8.91] 25.2 [7.39] 2.8	29.3 [8.59] 22.9 [6.71] 2.8	28.9 [8.47] 28.9 [8.47] 2.9	27.9 [8.18] 27.9 [8.18] 2.8	26.9 [7.88] 26.9 [7.88] 2.8
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	33.5 [9.82] 21.8 [6.39] 3.0	32.3 [9.47] 19.9 [5.83] 3.0	31.1 [9.11] 18.0 [5.28] 2.9	30.7 [9.00] 27.3 [8.00] 3.0	29.6 [8.67] 24.9 [7.30] 3.0	28.5 [8.35] 22.6 [6.62] 2.9	28.1 [8.24] 28.1 [8.24] 3.0	27.1 [7.94] 27.1 [7.94] 3.0	26.1 [7.65] 26.1 [7.65] 2.9
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	36.8 [10.79] 23.9 [7.00] 3.2	35.5 [10.40] 21.9 [6.42] 3.1	34.2 [10.02] 19.9 [5.83] 3.1	34.0 [9.96] 29.4 [8.62] 3.2	32.8 [9.61] 26.9 [7.88] 3.1	31.6 [9.26] 24.4 [7.15] 3.1	31.4 [9.20] 31.4 [9.20] 3.1	30.3 [8.88] 30.3 [8.88] 3.1	29.2 [8.56] 29.2 [8.56] 3.0

GROSS SYSTEMS PERFORMANCE DATA—RSPM-A042

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		1680 [793]	1400 [661]	1120 [529]	1680 [793]	1400 [661]	1120 [529]	1680 [793]	1400 [661]	1120 [529]	
DR ①		.11	.07	.03	.11	.07	.03	.11	.07	.03	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	54.2 [15.88] 34.3 [10.05] 2.4	52.3 [15.33] 31.3 [9.17] 2.3	50.4 [14.77] 28.4 [8.32] 2.3	51.1 [14.98] 40.5 [11.87] 2.4	49.3 [14.45] 37.1 [10.87] 2.3	47.5 [13.92] 33.6 [9.85] 2.3	48.6 [14.24] 46.7 [13.69] 2.3	46.9 [13.75] 42.7 [12.51] 2.3	45.2 [13.25] 38.7 [11.34] 2.3
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	52.6 [15.42] 33.3 [9.76] 2.6	50.7 [14.86] 30.4 [8.91] 2.5	48.9 [14.33] 27.6 [8.09] 2.5	49.5 [14.51] 39.5 [11.58] 2.5	47.8 [14.01] 36.2 [10.61] 2.5	46.1 [13.51] 32.8 [9.61] 2.5	47.0 [13.77] 45.8 [13.42] 2.5	45.3 [13.28] 41.8 [12.25] 2.5	43.7 [12.81] 37.9 [11.11] 2.4
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	51.1 [14.98] 32.4 [9.50] 2.7	49.3 [14.45] 29.7 [8.70] 2.7	47.5 [13.92] 26.9 [7.88] 2.7	48.0 [14.07] 38.7 [11.34] 2.7	46.4 [13.60] 35.4 [10.37] 2.7	44.7 [13.10] 32.1 [9.41] 2.6	45.5 [13.33] 44.9 [13.16] 2.7	43.9 [12.87] 41.0 [12.02] 2.7	42.3 [12.40] 37.2 [10.90] 2.6
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	49.7 [14.57] 31.7 [9.29] 2.9	47.9 [14.04] 29.0 [8.50] 2.9	46.2 [13.54] 26.3 [7.71] 2.8	46.6 [13.66] 38.0 [11.14] 2.9	45.0 [13.19] 34.7 [10.17] 2.9	43.3 [12.69] 31.5 [9.23] 2.8	44.1 [12.92] 44.1 [12.92] 2.9	42.5 [12.46] 40.4 [11.84] 2.8	41.0 [12.02] 36.6 [10.73] 2.8
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	48.3 [14.16] 31.1 [9.11] 3.1	46.6 [13.66] 28.4 [8.32] 3.1	44.9 [13.16] 25.8 [7.56] 3.0	45.2 [13.25] 37.3 [10.93] 3.1	43.6 [12.78] 34.1 [9.99] 3.0	42.1 [12.34] 31.0 [9.09] 3.0	42.7 [12.51] 42.7 [12.51] 3.1	41.2 [12.07] 39.9 [11.69] 3.0	39.7 [11.63] 36.1 [10.58] 3.0
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	46.9 [13.75] 30.4 [8.91] 3.3	45.2 [13.25] 27.8 [8.15] 3.2	43.6 [12.78] 25.2 [7.39] 3.2	43.8 [12.84] 36.7 [10.76] 3.3	42.3 [12.40] 33.6 [9.85] 3.2	40.8 [11.96] 30.4 [8.91] 3.2	41.3 [12.10] 41.3 [12.10] 3.3	39.8 [11.66] 39.2 [11.49] 3.2	38.4 [11.25] 35.6 [10.43] 3.1
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	45.4 [13.31] 29.8 [8.73] 3.5	43.8 [12.84] 27.3 [8.00] 3.4	42.2 [12.37] 24.7 [7.24] 3.4	42.4 [12.43] 36.1 [10.58] 3.5	40.9 [11.99] 33.0 [9.67] 3.4	39.4 [11.55] 29.9 [8.76] 3.4	39.8 [11.66] 39.8 [11.66] 3.4	38.4 [11.25] 38.4 [11.25] 3.4	37.0 [10.84] 35.1 [10.29] 3.3
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	43.9 [12.87] 29.2 [8.56] 3.7	42.4 [12.43] 26.7 [7.83] 3.6	40.8 [11.96] 24.2 [7.09] 3.5	40.9 [11.99] 35.4 [10.37] 3.7	39.4 [11.55] 32.4 [9.50] 3.6	38.0 [11.14] 29.4 [8.62] 3.5	38.3 [11.22] 38.3 [11.22] 3.6	37.0 [10.84] 37.0 [10.84] 3.6	35.6 [10.43] 34.5 [10.11] 3.5
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	42.3 [12.40] 28.5 [8.35] 3.8	40.8 [11.96] 26.0 [7.62] 3.8	39.3 [11.52] 23.6 [6.92] 3.7	39.3 [11.52] 34.7 [10.17] 3.8	37.9 [11.11] 31.8 [9.32] 3.8	36.5 [10.70] 28.8 [8.44] 3.7	36.7 [10.76] 36.7 [10.76] 3.8	35.4 [10.37] 35.4 [10.37] 3.7	34.1 [9.99] 33.9 [9.94] 3.7

DR —Depression ratio
dbE—Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power—KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions



SYSTEMS PERFORMANCE—RSPM- SERIES

GROSS SYSTEMS PERFORMANCE DATA—RSPM-A043CK

wbE		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
		CFM [L/s]	1680 [793]	1400 [661]	1120 [529]	1680 [793]	1400 [661]	1120 [529]	1680 [793]	1400 [661]	1120 [529]
DR ①		.05	.09	.12	.05	.09	.12	.05	.09	.12	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	51.7 [15.2] 31.5 [9.2] 2.6	49.9 [14.6] 27.0 [7.9] 2.6	48.1 [14.1] 22.8 [6.7] 2.5	49.5 [14.5] 39.5 [11.6] 2.6	47.7 [14.0] 34.3 [10.1] 2.6	46.0 [13.5] 29.6 [8.7] 2.5	46.4 [13.6] 43.4 [12.7] 2.6	44.8 [13.1] 38.1 [11.2] 2.5	43.2 [12.7] 33.1 [9.7] 2.5
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	50.6 [14.8] 31.3 [9.2] 2.8	48.8 [14.3] 26.8 [7.9] 2.7	47.0 [13.8] 22.7 [6.7] 2.7	48.4 [14.2] 39.3 [11.5] 2.8	46.7 [13.7] 34.2 [10.0] 2.7	45.0 [13.2] 29.5 [8.7] 2.7	45.4 [13.3] 43.3 [12.7] 2.7	43.8 [12.8] 38.0 [11.1] 2.7	42.2 [12.4] 33.0 [9.7] 2.7
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	49.4 [14.5] 30.9 [9.1] 3.0	47.7 [14.0] 26.6 [7.8] 2.9	45.9 [13.5] 22.5 [6.6] 2.9	47.2 [13.8] 38.9 [11.4] 2.9	45.5 [13.3] 33.9 [9.9] 2.9	43.9 [12.9] 29.3 [8.6] 2.8	44.2 [13.0] 43.0 [12.6] 2.9	42.6 [12.5] 37.7 [11.1] 2.9	41.1 [12.0] 32.8 [9.6] 2.8
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	48.1 [14.1] 30.4 [8.9] 3.1	46.4 [13.6] 26.1 [7.7] 3.1	44.7 [13.1] 22.1 [6.5] 3.0	45.9 [13.5] 38.4 [11.3] 3.1	44.2 [13.0] 33.4 [9.8] 3.1	42.6 [12.5] 28.8 [8.5] 3.0	42.8 [12.5] 42.3 [12.4] 3.1	41.3 [12.1] 37.2 [10.9] 3.0	39.8 [11.7] 32.4 [9.5] 3.0
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	46.6 [13.7] 29.6 [8.7] 3.3	45.0 [13.2] 25.5 [7.5] 3.3	43.3 [12.7] 21.6 [6.3] 3.2	44.4 [13.0] 37.6 [11.0] 3.3	42.8 [12.5] 32.8 [9.6] 3.3	41.3 [12.1] 28.4 [8.3] 3.2	41.4 [12.1] 41.4 [12.1] 3.3	39.9 [11.7] 36.6 [10.7] 3.2	38.5 [11.3] 31.9 [9.4] 3.2
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	45.0 [13.2] 28.8 [8.5] 3.5	43.5 [12.7] 24.8 [7.3] 3.5	41.9 [12.3] 21.0 [6.2] 3.4	42.8 [12.5] 36.7 [10.8] 3.5	41.3 [12.1] 32.1 [9.4] 3.4	39.8 [11.7] 27.7 [8.1] 3.4	39.8 [11.7] 39.8 [11.7] 3.5	38.4 [11.3] 35.9 [10.5] 3.4	37.0 [10.8] 31.3 [9.2] 3.4
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	43.4 [12.7] 27.9 [8.2] 3.7	41.8 [12.3] 23.9 [7.0] 3.7	40.3 [11.8] 20.3 [6.0] 3.6	41.1 [12.0] 35.6 [10.4] 3.7	39.7 [11.6] 31.2 [9.2] 3.7	38.3 [11.2] 27.0 [7.9] 3.6	38.1 [11.2] 38.1 [11.2] 3.7	36.8 [10.8] 35.0 [10.3] 3.6	35.4 [10.4] 30.5 [8.9] 3.6
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	41.5 [12.2] 26.6 [7.8] 4.0	40.1 [11.8] 22.9 [6.7] 3.9	38.6 [11.3] 19.4 [5.7] 3.8	39.3 [11.5] 34.4 [10.1] 3.9	38.0 [11.1] 30.2 [8.9] 3.9	36.6 [10.7] 26.1 [7.7] 3.8	36.3 [10.6] 36.3 [10.6] 3.9	35.0 [10.3] 33.9 [9.9] 3.9	33.8 [9.9] 29.6 [8.7] 3.8
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	39.6 [11.6] 25.1 [7.4] 4.2	38.2 [11.2] 21.6 [6.3] 4.1	36.8 [10.8] 18.3 [5.4] 4.0	37.4 [11.0] 33.1 [9.7] 4.2	36.1 [10.6] 29.0 [8.5] 4.1	34.8 [10.2] 25.1 [7.4] 4.0	34.4 [10.1] 34.4 [10.1] 4.2	33.2 [9.7] 32.8 [9.6] 4.1	32.0 [9.4] 28.7 [8.4] 4.0

GROSS SYSTEMS PERFORMANCE DATA—RSPM-A043JK

wbE		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
		CFM [L/s]	1680 [793]	1400 [661]	1120 [529]	1680 [793]	1400 [661]	1120 [529]	1680 [793]	1400 [661]	1120 [529]
DR ①		.05	.09	.12	.05	.09	.12	.05	.09	.12	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	51.7 [15.2] 31.5 [9.2] 2.6	49.9 [14.6] 27.0 [7.9] 2.6	48.1 [14.1] 22.8 [6.7] 2.5	49.5 [14.5] 39.5 [11.6] 2.6	47.7 [14.0] 34.3 [10.1] 2.6	46.0 [13.5] 29.6 [8.7] 2.5	46.4 [13.6] 43.4 [12.7] 2.6	44.8 [13.1] 38.1 [11.2] 2.5	43.2 [12.7] 33.1 [9.7] 2.5
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	50.6 [14.8] 31.3 [9.2] 2.8	48.8 [14.3] 26.8 [7.9] 2.7	47.0 [13.8] 22.7 [6.7] 2.7	48.4 [14.2] 39.3 [11.5] 2.8	46.7 [13.7] 34.2 [10.0] 2.7	45.0 [13.2] 29.5 [8.7] 2.7	45.4 [13.3] 43.3 [12.7] 2.7	43.8 [12.8] 38.0 [11.1] 2.7	42.2 [12.4] 33.0 [9.7] 2.7
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	49.4 [14.5] 30.9 [9.1] 3.0	47.7 [14.0] 26.6 [7.8] 2.9	45.9 [13.5] 22.5 [6.6] 2.9	47.2 [13.8] 38.9 [11.4] 2.9	45.5 [13.3] 33.9 [9.9] 2.9	43.9 [12.9] 29.3 [8.6] 2.8	44.2 [13.0] 43.0 [12.6] 2.9	42.6 [12.5] 37.7 [11.1] 2.9	41.1 [12.0] 32.8 [9.6] 2.8
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	48.1 [14.1] 30.4 [8.9] 3.1	46.4 [13.6] 26.1 [7.7] 3.1	44.7 [13.1] 22.1 [6.5] 3.0	45.9 [13.5] 38.4 [11.3] 3.1	44.2 [13.0] 33.4 [9.8] 3.1	42.6 [12.5] 28.8 [8.5] 3.0	42.8 [12.5] 42.3 [12.4] 3.1	41.3 [12.1] 37.2 [10.9] 3.0	39.8 [11.7] 32.4 [9.5] 3.0
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	46.6 [13.7] 29.6 [8.7] 3.3	45.0 [13.2] 25.5 [7.5] 3.3	43.3 [12.7] 21.6 [6.3] 3.2	44.4 [13.0] 37.6 [11.0] 3.3	42.8 [12.5] 32.8 [9.6] 3.3	41.3 [12.1] 28.4 [8.3] 3.2	41.4 [12.1] 41.4 [12.1] 3.3	39.9 [11.7] 36.6 [10.7] 3.2	38.5 [11.3] 31.9 [9.4] 3.2
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	45.0 [13.2] 28.8 [8.5] 3.5	43.5 [12.7] 24.8 [7.3] 3.5	41.9 [12.3] 21.0 [6.2] 3.4	42.8 [12.5] 36.7 [10.8] 3.5	41.3 [12.1] 32.1 [9.4] 3.4	39.8 [11.7] 27.7 [8.1] 3.4	39.8 [11.7] 39.8 [11.7] 3.5	38.4 [11.3] 35.9 [10.5] 3.4	37.0 [10.8] 31.3 [9.2] 3.4
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	43.4 [12.7] 27.9 [8.2] 3.7	41.8 [12.3] 23.9 [7.0] 3.7	40.3 [11.8] 20.3 [6.0] 3.6	41.1 [12.0] 35.6 [10.4] 3.7	39.7 [11.6] 31.2 [9.2] 3.7	38.3 [11.2] 27.0 [7.9] 3.6	38.1 [11.2] 38.1 [11.2] 3.7	36.8 [10.8] 35.0 [10.3] 3.6	35.4 [10.4] 30.5 [8.9] 3.6
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	41.5 [12.2] 26.6 [7.8] 4.0	40.1 [11.8] 22.9 [6.7] 3.9	38.6 [11.3] 19.4 [5.7] 3.8	39.3 [11.5] 34.4 [10.1] 3.9	38.0 [11.1] 30.2 [8.9] 3.9	36.6 [10.7] 26.1 [7.7] 3.8	36.3 [10.6] 36.3 [10.6] 3.9	35.0 [10.3] 33.9 [9.9] 3.9	33.8 [9.9] 29.6 [8.7] 3.8
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	39.6 [11.6] 25.1 [7.4] 4.2	38.2 [11.2] 21.6 [6.3] 4.1	36.8 [10.8] 18.3 [5.4] 4.0	37.4 [11.0] 33.1 [9.7] 4.2	36.1 [10.6] 29.0 [8.5] 4.1	34.8 [10.2] 25.1 [7.4] 4.0	34.4 [10.1] 34.4 [10.1] 4.2	33.2 [9.7] 32.8 [9.6] 4.1	32.0 [9.4] 28.7 [8.4] 4.0

DR —Depression ratio
dbE —Entering air dry bulb
wbE —Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power—KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[] Designates Metric Conversions



INDOOR AIRFLOW PERFORMANCE—230 VOLTS

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory	Manufacturer Recommended Air-Flow Range (Min/Max) CFM	Blower Size/ Motor HP [W] & # of Speeds	Motor Speed	CFM [L/s] Air Delivery/RPM/Watts—230 Volts Side Discharge—Wet Coil											
					External Static Pressure—Inches W.C. [kPa]											
					0.1 [0.02]	0.2 [0.05]	0.3 [0.07]	0.4 [0.10]	0.5 [0.12]	0.6 [0.15]	0.7 [0.17]	0.8 [0.20]	0.9 [0.22]	1.0 [0.25]		
2.0 [7.03]	Low	700/900	10x9 1/4 HP [186] 2 Speed Motor (PSC Motor)	Low	CFM	827 [390]	811 [383]	782 [369]	740 [349]	684 [323]	614 [290]	531 [251]	435 [205]	—	—	
					RPM	450	533	626	742	799	894	985	—	—		
					Watts	278	273	269	254	244	227	216	198	—	—	
					CFM	1230 [580]	1223 [577]	1216 [574]	1211 [572]	1187 [560]	1125 [531]	1020 [481]	874 [412]	696 [328]	504 [238]	
2.5 [8.79]	Low	875/1125	10x9 1/3 HP [249] 2 Speed Motor (PSC Motor)	Low	CFM	1032 [487]	1030 [486]	1014 [479]	979 [462]	923 [436]	843 [398]	735 [347]	596 [281]	423 [200]	—	
					RPM	533	570	659	746	795	863	934	1019	—	—	
					Watts	336	331	326	314	303	280	271	227	210	—	—
					CFM	1312 [619]	1301 [614]	1292 [610]	1276 [602]	1246 [588]	1196 [564]	1117 [527]	1003 [473]	845 [399]	—	
3.0 [10.55]	Low	1050/1350	10x9 1/2 HP [373] 2 Speed Motor (PSC Motor)	Low	CFM	1261 [595]	1253 [591]	1225 [578]	1177 [555]	1110 [524]	1023 [483]	915 [432]	788 [372]	641 [303]	—	
					RPM	648	705	754	802	854	896	985	1008	1041	—	—
					Watts	398	395	387	391	370	361	323	310	300	—	—
					CFM	2068 [976]	2008 [948]	1957 [924]	1905 [899]	1841 [869]	1753 [827]	1629 [769]	1458 [688]	1228 [580]	929 [438]	
3.5 [12.31]	Low	1225/1575	11x9 1/2 HP [373] 2 Speed Motor (PSC Motor)	High	CFM	850	883	917	946	972	999	1028	1049	1091	1108	
					RPM	850	883	917	946	972	999	1028	1049	1091	1108	
					Watts	826	806	784	762	734	702	658	626	546	512	
					CFM	1431 [675]	1394 [658]	1348 [636]	1302 [614]	1258 [594]	1208 [570]	1140 [538]	1030 [486]	849 [401]	557 [263]	
4.0 [14.07]	Low	1400/1800	11x9 3/4 HP [559] 2 Speed Motor (PSC Motor)	Low	CFM	540	579	633	686	724	776	831	868	1035	1076	
					RPM	540	579	633	686	724	776	831	868	1035	1076	
					Watts	482	479	477	470	459	453	437	423	335	292	
					CFM	1960 [925]	1936 [914]	1903 [898]	1859 [877]	1806 [852]	1742 [822]	1669 [788]	1585 [748]	1491 [704]	1387 [655]	
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2 Speed Motor (PSC Motor)	High	CFM	703	727	750	780	809	846	877	910	940	975	
					RPM	703	727	750	780	809	846	877	910	940	975	
					Watts	783	782	776	759	750	729	712	686	656	625	
					CFM	1674 [790]	1638 [773]	1595 [753]	1547 [730]	1492 [704]	1432 [676]	1365 [644]	1293 [610]	1214 [573]	1129.05 [533]	
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2 Speed Motor (PSC Motor)	Low	CFM	576	618	668	708	753	789	832	874	915	954	
					RPM	576	618	668	708	753	789	832	874	915	954	
					Watts	575	563	556	549	544	532	522	503	483	465	
					CFM	1996 [942]	1976 [933]	1947 [919]	1909 [901]	1863 [879]	1808 [853]	1744 [823]	1671 [789]	1590 [750]	1500 [708]	
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2 Speed Motor (PSC Motor)	High	CFM	680	722	752	781	807	833	867	912	936	973	
					RPM	680	722	752	781	807	833	867	912	936	973	
					Watts	799	787	784	760	753	749	730	699	683	652	
					CFM	2044 [965]	2017 [952]	1983 [936]	1941 [916]	1892 [893]	1836 [866]	1773 [837]	1702 [803]	1623 [766]	1537 [725]	
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2 Speed Motor (PSC Motor)	High	CFM	689	723	756	798	822	855	889	924	951	988	
					RPM	689	723	756	798	822	855	889	924	951	988	
					Watts	886	870	865	849	831	817	799	782	755	726	
					CFM	2693 [1271]	2654 [1253]	2606 [1230]	2549 [1203]	2483 [1172]	2408 [1136]	2323 [1096]	2230 [1052]	2127 [1004]	2015 [951]	
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2 Speed Motor (PSC Motor)	High	CFM	876	897	915	938	966	975	996	1009	1044		
					Watts	1438	1427	1399	1368	1340	1312	1274	1228	1192	1146	

[] Designates Metric Conversions

AIRFLOW PERFORMANCE—RSNM- SERIES



INDOOR AIRFLOW PERFORMANCE—208 VOLTS

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory	Manufacturer Recommended Air-Flow Range (Min/Max) CFM	Blower Size/ Motor HP [W] & # of Speeds	Motor Speed	CFM [L/s] Air Delivery/RPM/Watts—208 Volts Side Discharge—Wet Coil																					
					External Static Pressure—Inches W.C. [kPa]																					
					0.1 [.02]	0.2 [.05]	0.3 [0.07]	0.4 [.10]	0.5 [.12]	0.6 [.15]	0.7 [1.17]	0.8 [.20]	0.9 [.22]	1.0 [1.25]												
2.0 [7.03]	Low	700/900	10x9 1/4 HP [186] 2 Speed Motor (PSC Motor)	Low	CFM	723 [341]	692 [327]	654 [309]	609 [287]	556 [262]	496 [234]	428 [202]	—	—	—	—	—	—	—	—	—					
					RPM	443	528	651	710	819	863	914	—	—	—	—	—	—	—	—	—	—	—			
					Watts	230	222	219	214	202	196	184	—	—	—	—	—	—	—	—	—	—	—	—		
2.5 [8.79]	Low	875/1125	10x9 1/3 HP [249] 2 Speed Motor (PSC Motor)	High	CFM	1062 [501]	1062 [501]	1058 [499]	1043 [492]	1013 [478]	982 [454]	884 [417]	774 [365]	627 [296]	437 [206]	—	—	—	—	—	—	—				
					RPM	528	618	674	735	812	895	936	—	—	—	—	—	—	—	—	—	—	—	—		
					Watts	396	393	384	376	361	335	318	297	244	—	—	—	—	—	—	—	—	—	—	—	
3.0 [10.55]	Low	1050/1350	10x9 1/2 HP [373] 2 Speed Motor (PSC Motor)	Low	CFM	923 [436]	904 [427]	874 [412]	832 [393]	774 [365]	698 [329]	602 [284]	483 [228]	—	—	—	—	—	—	—	—	—				
					RPM	498	543	648	728	806	853	947	—	—	—	—	—	—	—	—	—	—	—	—		
					Watts	280	278	268	259	252	243	219	201	—	—	—	—	—	—	—	—	—	—	—	—	
3.5 [12.31]	Low	1225/1575	11x9 1/2 HP [373] 2 Speed Motor (PSC Motor)	High	CFM	1164 [549]	1154 [545]	1143 [539]	1124 [530]	1090 [514]	1034 [488]	948 [447]	826 [390]	660 [311]	445 [210]	—	—	—	—	—	—	—	—			
					RPM	526	596	670	744	803	864	945	—	—	—	—	—	—	—	—	—	—	—	—	—	
					Watts	401	398	388	379	371	350	322	310	259	—	—	—	—	—	—	—	—	—	—	—	
4.0 [14.07]	Low	1400/1800	11x9 3/4 HP [559] 2 Speed Motor (PSC Motor)	Low	CFM	1145 [540]	1142 [539]	1118 [528]	1073 [506]	1006 [475]	918 [433]	—	—	—	—	—	—	—	—	—	—	—	—			
					RPM	556	645	703	769	828	909	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
					Watts	346	340	335	326	321	298	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2 Speed Motor (PSC Motor)	High	CFM	1884 [889]	1850 [873]	1815 [857]	1772 [836]	1712 [808]	1630 [769]	1516 [715]	1363 [643]	1164 [549]	910 [429]	—	—	—	—	—	—	—	—	—		
					RPM	791	834	871	912	946	975	1004	1032	887	—	—	—	—	—	—	—	—	—	—	—	—
					Watts	704	694	675	655	638	606	581	548	464	—	—	—	—	—	—	—	—	—	—	—	—
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2 Speed Motor (PSC Motor)	High	CFM	1279 [604]	1237 [584]	1196 [564]	1151 [543]	1098 [518]	1032 [487]	950 [448]	846 [399]	717 [338]	558 [263]	—	—	—	—	—	—	—	—	—		
					RPM	490	539	598	653	709	772	811	887	—	—	—	—	—	—	—	—	—	—	—	—	—
					Watts	401	400	393	391	381	373	364	343	329	305	—	—	—	—	—	—	—	—	—	—	—
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2 Speed Motor (PSC Motor)	High	CFM	1751 [826]	1729 [816]	1698 [801]	1658 [782]	1608 [759]	1549 [731]	1481 [699]	1404 [663]	1317 [622]	1221 [576]	—	—	—	—	—	—	—	—	—		
					RPM	640	668	706	734	781	813	851	888	837	—	—	—	—	—	—	—	—	—	—	—	—
					Watts	660	658	651	644	628	617	603	581	557	—	—	—	—	—	—	—	—	—	—	—	—
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2 Speed Motor (PSC Motor)	High	CFM	1400 [661]	1393 [657]	1373 [648]	1337 [631]	1288 [608]	1225 [578]	1147 [541]	1055 [498]	949 [448]	828 [391]	—	—	—	—	—	—	—	—	—		
					RPM	536	578	623	677	718	782	830	863	—	—	—	—	—	—	—	—	—	—	—	—	—
					Watts	471	466	458	455	453	442	429	420	403	374	—	—	—	—	—	—	—	—	—	—	—
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2 Speed Motor (PSC Motor)	High	CFM	1786 [843]	1764 [833]	1734 [818]	1695 [800]	1649 [778]	1595 [753]	1532 [723]	1462 [690]	1384 [653]	1297 [612]	—	—	—	—	—	—	—	—	—		
					RPM	618	643	684	726	757	805	841	883	924	955	—	—	—	—	—	—	—	—	—	—	—
					Watts	665	660	651	646	638	626	612	596	573	—	—	—	—	—	—	—	—	—	—	—	—
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2 Speed Motor (PSC Motor)	High	CFM	1848 [872]	1821 [859]	1795 [842]	1742 [822]	1690 [798]	1630 [769]	1562 [737]	1486 [701]	1402 [662]	1309 [618]	—	—	—	—	—	—	—	—	—		
					RPM	660	685	722	755	795	836	867	904	—	—	—	—	—	—	—	—	—	—	—	—	—
					Watts	731	725	720	707	698	680	665	651	623	596	—	—	—	—	—	—	—	—	—	—	—
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2 Speed Motor (PSC Motor)	High	CFM	2444 [1153]	2420 [1142]	2384 [1125]	2337 [1103]	2278 [1075]	2208 [1042]	2127 [1004]	2034 [960]	1930 [911]	1814 [856]	—	—	—	—	—	—	—	—	—		
					RPM	829	838	863	885	914	936	958	983	1003	—	—	—	—	—	—	—	—	—	—	—	—
					Watts	1225	1218	1197	1191	1160	1135	1105	1068	1035	—	—	—	—	—	—	—	—	—	—	—	—

[] Designates Metric Conversions



INDOOR AIRFLOW PERFORMANCE—230 VOLTS

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory	Manufacturer Recommended Air-Flow Range (Min/Max) CFM	Blower Size/ Motor HP [W] & # of Speeds	Motor Speed	CFM [L/s] Air Delivery/RPM/Watts—230 Volts Side Discharge—Wet Coil										
					External Static Pressure—Inches W.C. [kPa]										
					0.1 [0.02]	0.2 [0.05]	0.3 [0.07]	0.4 [0.10]	0.5 [0.12]	0.6 [0.15]	0.7 [0.17]	0.8 [0.20]	0.9 [0.22]	1.0 [0.25]	
2.0 [7.03]	Low (Tap 2)	700/900	10x9 1/4 HP [186] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	939 [443]	877 [414]	816 [385]	754 [356]	693 [327]	631 [298]	570 [269]	508 [240]	447 [211]	—
				High (Tap 1)	RPM	585	601	655	744	809	860	915	1001	1043	—
	Low (Tap 2)		CFM	1240 [585]	1184 [559]	1127 [532]	1071 [505]	1014 [479]	958 [452]	901 [425]	845 [399]	788 [372]	732 [345]	—	
			High (Tap 1)	RPM	607	634	698	761	815	880	946	989	1038	1091	—
2.5 [8.79]	Low (Tap 2)	875/1125	10x9 1/3 HP [249] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1169 [552]	1109 [523]	1049 [495]	988 [466]	928 [438]	868 [410]	807 [381]	747 [353]	687 [324]	626 [295]
				High (Tap 1)	RPM	603	619	693	756	809	893	942	989	1034	1076
	Low (Tap 2)		CFM	1365 [644]	1316 [621]	1266 [597]	1217 [574]	1168 [551]	1119 [528]	1069 [505]	1020 [481]	971 [458]	922 [435]	—	
			High (Tap 1)	RPM	631	677	732	784	843	894	942	1035	1077	1118	—
3.0 [10.55]	Low (Tap 2)	1050/1350	10x9 1/2 HP [373] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1328 [627]	1280 [604]	1231 [581]	1183 [558]	1135 [536]	1086 [513]	1038 [490]	990 [467]	941 [444]	893 [421]
				High (Tap 1)	RPM	648	697	752	807	857	903	989	1036	1077	1114
	Low (Tap 2)		CFM	1510 [713]	1464 [691]	1418 [669]	1373 [648]	1327 [626]	1281 [605]	1235 [583]	1190 [562]	1144 [540]	1098 [518]	—	
			High (Tap 1)	RPM	707	743	792	841	890	921	981	1031	1114	1151	—
3.5 [12.31]	Low (Tap 2)	1225/1575	11x9 1/2 HP [373] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1542 [728]	1490 [703]	1438 [679]	1386 [654]	1335 [630]	1283 [606]	1231 [581]	1180 [557]	1128 [532]	1076 [508]
				High (Tap 1)	RPM	598	617	662	714	758	800	849	876	913	951
	Low (Tap 2)		CFM	1740 [821]	1695 [800]	1649 [778]	1604 [757]	1558 [735]	1513 [714]	1467 [692]	1422 [671]	1376 [649]	1331 [628]	—	
			High (Tap 1)	RPM	632	665	709	749	797	833	879	917	951	981	—
4.0 [14.07]	Low (Tap 2)	1400/1800	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1701 [803]	1655 [781]	1609 [759]	1563 [738]	1517 [716]	1471 [694]	1425 [673]	1379 [651]	1333 [629]	1287 [607]
				High (Tap 1)	RPM	624	648	696	743	787	826	863	895	934	970
	Low (Tap 2)		CFM	1921 [907]	1876 [886]	1835 [866]	1792 [846]	1749 [825]	1706 [805]	1663 [785]	1620 [765]	1577 [744]	1534 [724]	—	
			High (Tap 1)	RPM	678	706	738	776	816	865	899	932	967	994	—
5.0 [17.6]	Low (Tap 2)	1750/2250	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1986 [937]	1945 [918]	1905 [899]	1864 [880]	1823 [860]	1782 [841]	1741 [822]	1700 [802]	1659 [783]	1618 [764]
				High (Tap 1)	RPM	731	759	792	832	871	909	943	979	1014	1055
	Low (Tap 2)		CFM	2229 [1052]	2190 [1034]	2152 [1016]	2114 [998]	2075 [979]	2037 [961]	1999 [943]	1960 [925]	1922 [907]	1884 [889]	—	
			High (Tap 1)	RPM	795	824	851	882	919	952	983	1013	1045	1077	—
					Watts	619	638	658	680	703	724	745	764	784	804

[] Designates Metric Conversions



INDOOR AIRFLOW PERFORMANCE—208 VOLTS

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory	Manufacturer Recommended Air-Flow Range (Min/Max) CFM	Blower Size/ Motor HP [W] & # of Speeds	Motor Speed	CFM [L/s] Air Delivery/RPM/Watts—208 Volts Side Discharge—Wet Coil										
					External Static Pressure—Inches W.C. [kPa]										
					0.1 [0.02]	0.2 [0.05]	0.3 [0.07]	0.4 [0.10]	0.5 [0.12]	0.6 [0.15]	0.7 [0.17]	0.8 [0.20]	0.9 [0.22]	1.0 [0.25]	
2.0 [7.03]	Low (Tap 2)	700/900	10x9 1/4 HP [186] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	959 [453]	892 [421]	825 [389]	758 [358]	691 [326]	624 [294]	557 [263]	491 [232]	—	—
					RPM	582	606	655	723	808	851	906	996	—	—
					Watts	132	110	96	106	119	123	132	144	—	—
2.5 [8.79]	Low (Tap 2)	875/1125	10x9 1/3 HP [249] 2 Speed X-13 (ECM) Motor	High (Tap 1)	CFM	1229 [580]	1170 [552]	1112 [525]	1054 [497]	996 [470]	938 [443]	879 [415]	821 [387]	763 [360]	705 [333]
					RPM	607	634	688	761	815	880	946	989	1038	1091
					Watts	161	145	159	173	182	196	210	220	231	237
3.0 [10.55]	Low (Tap 2)	1050/1350	10x9 1/2 HP [373] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1162 [548]	1099 [519]	1035 [488]	972 [459]	908 [429]	844 [398]	781 [369]	717 [338]	654 [309]	590 [278]
					RPM	603	626	690	752	815	906	941	984	1027	1096
					Watts	143	124	136	148	157	175	180	188	192	202
3.5 [12.31]	Low (Tap 2)	1225/1575	11x9 1/2 HP [373] 2 Speed X-13 (ECM) Motor	High (Tap 1)	CFM	1306 [616]	1253 [591]	1200 [566]	1147 [541]	1095 [517]	1042 [492]	989 [467]	937 [442]	884 [417]	831 [392]
					RPM	632	679	733	787	841	883	941	1035	1067	1099
					Watts	174	187	201	215	227	235	248	266	273	277
4.0 [14.07]	Low (Tap 2)	1400/1800	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1328 [627]	1276 [602]	1223 [577]	1171 [553]	1118 [528]	1066 [503]	1013 [478]	961 [454]	—	—
					RPM	642	693	747	803	852	903	988	1031	—	—
					Watts	173	187	200	214	226	238	254	263	—	—
5.0 [17.6]	Low (Tap 2)	1750/2250	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	High (Tap 1)	CFM	1508 [712]	1459 [689]	1409 [665]	1359 [641]	1310 [618]	1260 [595]	1210 [571]	1160 [547]	1111 [524]	1061 [501]
					RPM	698	738	789	839	888	933	983	1035	1103	1137
					Watts	243	255	271	285	299	310	322	332	343	343
5.0 [17.6]	Low (Tap 2)	1750/2250	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1531 [723]	1477 [697]	1423 [672]	1370 [647]	1316 [621]	1262 [596]	1208 [570]	1154 [545]	1101 [520]	1047 [494]
					RPM	602	619	668	715	757	801	844	878	918	954
					Watts	238	227	236	251	266	281	296	307	320	333
5.0 [17.6]	Low (Tap 2)	1750/2250	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	High (Tap 1)	CFM	1724 [814]	1678 [792]	1632 [770]	1586 [749]	1540 [727]	1495 [706]	1449 [684]	1403 [662]	1357 [640]	1311 [619]
					RPM	639	671	715	759	794	834	875	911	948	977
					Watts	295	309	330	348	363	380	397	414	429	440
5.0 [17.6]	Low (Tap 2)	1750/2250	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1708 [806]	1658 [782]	1609 [759]	1559 [736]	1510 [713]	1460 [689]	1410 [665]	1361 [642]	1311 [619]	1262 [596]
					RPM	619	651	686	741	783	822	859	894	937	971
					Watts	280	284	298	323	339	355	370	385	402	415
5.0 [17.6]	Low (Tap 2)	1750/2250	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	High (Tap 1)	CFM	1917 [905]	1872 [883]	1827 [862]	1782 [841]	1736 [819]	1691 [798]	1646 [777]	1601 [756]	1556 [734]	1510 [713]
					RPM	673	702	736	769	818	860	898	928	960	989
					Watts	377	392	409	426	451	473	490	504	518	531
5.0 [17.6]	Low (Tap 2)	1750/2250	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1954 [922]	1914 [903]	1874 [884]	1833 [865]	1793 [846]	1753 [827]	1713 [808]	1673 [790]	1632 [770]	1592 [751]
					RPM	719	747	779	818	857	894	928	963	998	1038
					Watts	439	451	469	491	512	534	553	573	590	611
5.0 [17.6]	Low (Tap 2)	1750/2250	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	High (Tap 1)	CFM	2173 [1026]	2136 [1008]	2098 [990]	2061 [973]	2024 [955]	1986 [937]	1949 [920]	1911 [902]	1874 [884]	1837 [867]
					RPM	775	803	830	860	896	928	959	988	1019	1050
					Watts	604	622	642	663	686	706	727	745	765	784

[] Designates Metric Conversions



ELECTRICAL DATA – RSNM SERIES											
		-A024JK	-A030JK	-A036CK	-A036JK	-A042CK	-A042JK	-A048CK	-A048JK	-A060CK	-A060JK
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253
	Minimum Circuit Ampacity	20/20	21/21	20/20	26/26	22/22	27/27	24/24	32/32	28/28	41/41
	Minimum Overcurrent Protection Device Size	25/25	25/25	25/25	30/30	25/25	35/35	30/30	40/40	35/35	50/50
	Maximum Overcurrent Protection Device Size	30/30	35/35	30/30	40/40	30/30	40/40	35/35	50/50	40/40	60/60
Compressor Motor	No.	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	3	1	3	1	3	1	3	1
	HP	2	2.5	3	3	3.5	3.5	4	4	4.5	4.5
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	13.5/13.5	14.1/14.1	12.8/12.8	17/17	13.5/13.5	17.9/17.9	14.7/14.7	21.2/21.2	16/16	26.4/26.4
	Amps (LRA)	54/54	73/73	95/95	96.7/96.7	88/88	112/112	115/115	115/115	110/110	134/134
Condenser Motor	No.	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1.5	1.5	1.5	1.5	1.5	1.5	1.9	1.9	1.9	1.9
	Amps (LRA)	3	3	3	3	3	3	4	4	4	4
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1	1	1	1	1	1
	HP	1/4	1/3	1/2	1/2	1/2	1/2	3/4	3/4	3/4	3/4
	Amps (FLA)	1.5	1.8	2.5	2.5	2.8	2.8	3.2	3.2	5.8	5.8
	Amps (LRA)	2.5	2.6	4.9	4.9	4.3	4.3	4.1	4.1	9	9



ELECTRICAL DATA – RSPM SERIES													
		-A024JK	-A030JK	-A036CK	-A036JK	-A042CK	-A042JK	A043CK	A043JK	-A048CK	-A048JK	-A060CK	-A060JK
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253
	Minimum Circuit Ampacity	23/23	24/24	22/22	27/27	25/25	30/30	25/25	30/30	27/27	35/35	30/30	43/43
	Minimum Overcurrent Protection Device Size	30/30	30/30	25/25	35/35	30/30	35/35	30/30	35/35	30/30	40/40	35/35	50/50
	Maximum Overcurrent Protection Device Size	35/35	35/35	30/30	40/40	35/35	45/45	35/35	45/45	40/40	50/50	45/45	60/60
Compressor Motor	No.	1	1	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	3	1	3	1	3	1	3	1	3	1
	HP	2	2.5	3	3	3.5	3.5	3450	3450	4	4	4.5	4.5
	RPM	3450	3450	3450	3450	3450	3450	3 1/2	3.5	3450	3450	3450	3450
	Amps (RLA)	13.5/13.5	14.1/14.1	12.8/12.8	17/17	13.5/13.5	17.9/17.9	13.5/13.5	17.9/17.9	14.7/14.7	21.2/21.2	16/16	26.4/26.4
	Amps (LRA)	58.3/58.3	73/73	95/95	96.7/96.7	88/88	112/112	88/88	112/112	115/115	115/115	110/110	134/134
Condenser Motor	No.	1	1	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1.5	1.5	1.5	1.5	1.5	1.5	1.5/1.5	1.5/1.5	1.9	1.9	1.9	1.9
	Amps (LRA)	3	3	3	3	3	3	3/3	3/3	4	4	4	4
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1	1	1	1	1	1	1	1
	HP	1/4	1/3	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4	3/4	3/4
	Amps (FLA)	4.1	4.1	4.1	4.1	6	6	6/6	6/6	6	6	7.6	7.6



208-240 VOLT, SINGLE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION													
Separate Power Supply For Both Unit and Heater Kit													
Unit Model No. RSNM-	Single Power Supply For Both Unit and Heater Kit						Heater Kit						
	RXQJ-C Heater Kit Nominal kW	No. of Elements	No. of Sequence Steps	Rated Heater kW @ 208-240 V	Heater KBTU/Hr @ 208-240 V	Heater Amp. @ 208-240 V	Unit Min. Ckt. Ampacity @ 208-240 V	Over Current Protective Device Size		Min. Circuit Ampacity 208-240 V	Heat Pump		
								Min./Max. @ 208 V	Min./Max. @ 240 V		Min./Max. @ 208 V	Min./Max. @ 240 V	
A024J	No Heat	—	—	—	—	—	20/20	25/30	25/30	20/20	—	25/30	25/30
	C05J	1	1	3.6/4.8	12.28/16.38	17.33/20	24/27	25/30	30/30	—	—	—	—
	C07J	1	1	5.4/7.2	18.42/24.56	26/30	35/40	35/35	40/40	—	—	—	—
A030J	C10J	2	1	7.2/9.6	24.57/32.76	34.7/40	46/52	50/50	60/60	—	—	—	—
	No Heat	—	—	—	—	—	21/21	25/35	25/35	21/21	—	25/35	25/35
	C05J	1	1	3.6/4.8	12.28/16.38	17.33/20	24/28	25/35	30/35	—	—	—	—
A036J	C07J	1	1	5.4/7.2	18.42/24.56	26/30	35/40	35/35	40/40	—	—	—	—
	C10J	2	1	7.2/9.6	24.57/32.76	34.7/40	46/53	50/50	60/60	—	—	—	—
	C15J	3	2	10.8/14.4	36.85/49.13	52/60	68/78	70/70	80/80	—	—	—	—
A042J	No Heat	—	—	—	—	—	26/26	30/40	30/40	26/26	—	30/40	30/40
	C05J	1	1	3.6/4.8	12.28/16.38	17.33/20	26/29	30/40	30/40	—	—	—	—
	C07J	1	1	5.4/7.2	18.42/24.56	26/30	36/41	40/40	45/45	—	—	—	—
A048J	C10J	2	1	7.2/9.6	24.57/32.76	34.7/40	47/54	50/50	60/60	—	—	—	—
	C15J	3	2	10.8/14.4	36.85/49.13	52/60	69/79	70/70	80/80	—	—	—	—
	C20J	4	2	14.4/19.2	49.12/65.52	69.33/80	91/104	100/100	110/110	—	—	—	—
A060J	No Heat	—	—	—	—	—	32/32	40/50	40/50	32/32	—	40/50	40/50
	C05J	1	1	3.6/4.8	12.28/16.38	17.33/20	32/32	35/45	35/45	—	—	—	—
	C07J	1	1	5.4/7.2	18.42/24.56	26/30	37/42	40/45	45/45	—	—	—	—
A060J	C10J	2	1	7.2/9.6	24.57/32.76	34.7/40	48/54	50/50	60/60	—	—	—	—
	C15J	3	2	10.8/14.4	36.85/49.13	52/60	69/79	70/70	80/80	—	—	—	—
	C20J	4	2	14.4/19.2	49.12/65.52	69.33/80	91/104	100/100	110/110	—	—	—	—
A060J	No Heat	—	—	—	—	—	41/41	50/60	50/60	41/41	—	50/60	50/60
	C05J	1	1	3.6/4.8	12.28/16.38	17.33/20	41/41	50/60	50/60	—	—	—	—
	C07J	1	1	5.4/7.2	18.42/24.56	26/30	41/45	50/60	50/60	—	—	—	—
A060J	C10J	2	1	7.2/9.6	24.57/32.76	34.7/40	51/58	60/60	60/60	—	—	—	—
	C15J	3	2	10.8/14.4	36.85/49.13	52/60	73/83	80/80	90/90	—	—	—	—
	C20J	4	2	14.4/19.2	49.12/65.52	69.33/80	94/108	100/100	110/110	—	—	—	—



208-240 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION

Single Power Supply For Both Unit and Heater Kit										Separate Power Supply For Both Unit and Heater Kit					
Unit Model No. RSNM-	Heater Kit					Heater Kit					Heat Pump				
	RXQJ-C Heater Kit Nominal kW	No. of Elements	No. of Sequence Steps	Rated Heater kW @ 208-240 V	Heater KBTU/Hr @ 208-240 V	Heater Amp. @ 208-240 V	Unit Min. Ampacity @ 208-240 V	Over Current Protective Device Size Min./Max. @ 208 V	Over Current Protective Device Size Min./Max. @ 240 V	Min. Ckt. Ampacity	Max. Fuse Size	Min. Circuit Ampacity 208-240 V	Min./Max. @ 208 V	Over Current Protective Device Size Min./Max. @ 240 V	
A036C	No Heat	—	—	—	—	—	20/20	25/30	25/30	—	—	20/20	25/30	25/30	
	10C	2	1	7.2/9.6	24.57/32.76	20/23.1	29/32	30/30	35/35	25/29	25/30	—	—	—	
	15C	3	2	10.8/14.4	36.85/49.13	30.1/34.7	41/47	45/45	50/50	38/44	40/45	—	—	—	
A042C	No Heat	—	—	—	—	—	22/22	25/30	25/30	—	—	22/22	25/30	25/30	
	10C	2	1	7.2/9.6	24.57/32.76	20/23.1	29/33	30/30	35/35	25/29	25/30	—	—	—	
	15C	3	2	10.8/14.4	36.85/49.13	30.1/34.7	42/47	45/45	50/50	38/44	40/45	—	—	—	
	20C	4	2	14.4/19.2	49.12/65.52	40/46.3	54/62	60/60	70/70	50/58	50/60	—	—	—	
A048C	No Heat	—	—	—	—	—	24/24	30/35	30/35	—	—	24/24	30/35	30/35	
	10C	2	1	7.2/9.6	24.57/32.76	20/23.1	29/33	30/30	35/35	25/29	25/30	—	—	—	
	15C	3	2	10.8/14.4	36.85/49.13	30.1/34.7	42/48	45/45	50/50	38/44	40/45	—	—	—	
	20C	4	2	14.4/19.2	49.12/65.52	40/46.3	54/62	60/60	70/70	50/58	50/60	—	—	—	
A060C	No Heat	—	—	—	—	—	28/28	35/40	35/40	—	—	28/28	35/40	35/40	
	10C	2	1	7.2/9.6	24.57/32.76	20/23.1	33/37	35/45	40/45	25/29	25/30	—	—	—	
	15C	3	2	10.8/14.4	36.85/49.13	30.1/34.7	45/51	45/45	60/60	38/44	40/45	—	—	—	
	20C	4	2	14.4/19.2	49.12/65.52	40/46.3	58/66	60/60	70/70	50/58	50/60	—	—	—	



208-240 VOLT, SINGLE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION														
Separate Power Supply For Both Unit and Heater Kit														
Unit Model No. RSPM-	Single Power Supply For Both Unit and Heater Kit							Heater Kit						
	RXQJ-C Heater Kit Nominal kW	No. of Elements	No. of Sequence Steps	Rated Heater kW @ 208-240 V	Heater KBTU/Hr @ 208-240 V	Heater Amp. @ 208-240 V	Unit Min. Ckt. Ampacity @ 208-240 V	Over Current Protective Device Size @ 240 V		Heater Kit		Heat Pump		
								Min./Max.	Min./Max.	Min. Ckt. Ampacity	Max. Fuse Size	Min. Circuit Ampacity 208-240 V	Min./Max. @ 208 V	Min./Max. @ 240 V
A024J	No Heat	—	—	—	—	—	23/23	30/35	30/35	—	—	23/23	30/35	30/35
	05J	1	1	3.6/4.8	12.28/16.38	17.33/20	27/31	30/35	35/35	22/25	25/25	—	—	—
	07J	1	1	5.4/7.2	18.42/24.56	26/30	38/43	40/40	45/45	33/38	35/40	—	—	—
A030J	10J	2	1	7.2/9.6	24.57/32.76	34.7/40	49/56	50/50	60/60	44/50	45/50	—	—	—
	No Heat	—	—	—	—	—	24/24	30/35	30/35	—	—	24/24	30/35	30/35
	05J	1	1	3.6/4.8	12.28/16.38	17.33/20	27/31	30/35	35/35	22/25	25/25	—	—	—
A036J	07J	1	1	5.4/7.2	18.42/24.56	26/30	38/43	40/40	45/45	33/38	35/40	—	—	—
	10J	2	1	7.2/9.6	24.57/32.76	34.7/40	49/56	50/50	60/60	44/50	45/50	—	—	—
	15J	3	2	10.8/14.4	36.85/49.13	52/60	71/81	80/80	90/90	65/75	70/80	—	—	—
A042J	No Heat	—	—	—	—	—	27/27	35/40	35/40	—	—	27/27	35/40	35/40
	05J	1	1	3.6/4.8	12.28/16.38	17.33/20	27/31	35/40	35/40	22/25	25/25	—	—	—
	07J	1	1	5.4/7.2	18.42/24.56	26/30	38/43	40/40	45/45	33/38	35/40	—	—	—
A043J	10J	2	1	7.2/9.6	24.57/32.76	34.7/40	49/56	50/50	60/60	44/50	45/50	—	—	—
	15J	3	2	10.8/14.4	36.85/49.13	52/60	73/83	80/80	90/90	65/75	70/80	—	—	—
	20J	4	2	14.4/19.2	49.12/65.52	69.33/80	95/108	100/100	110/110	87/100	90/100	—	—	—
A048J	No Heat	—	—	—	—	—	35/35	40/50	40/50	—	—	35/35	40/50	40/50
	05J	1	1	3.6/4.8	12.28/16.38	17.33/20	35/35	35/45	35/45	22/25	25/25	—	—	—
	07J	1	1	5.4/7.2	18.42/24.56	26/30	40/45	40/40	45/45	33/38	35/40	—	—	—
A060J	10J	2	1	7.2/9.6	24.57/32.76	34.7/40	51/58	60/60	60/60	44/50	45/50	—	—	—
	15J	3	2	10.8/14.4	36.85/49.13	52/60	73/83	80/80	90/90	65/75	70/80	—	—	—
	20J	4	2	14.4/19.2	49.12/65.52	69.33/80	95/108	100/100	110/110	87/100	90/100	—	—	—
A060J	No Heat	—	—	—	—	—	43/43	50/60	50/60	—	—	43/43	50/60	50/60
	05J	1	1	3.6/4.8	12.28/16.38	17.33/20	43/43	50/60	50/60	22/25	25/25	—	—	—
	07J	1	1	5.4/7.2	18.42/24.56	26/30	43/47	50/60	50/60	33/38	35/40	—	—	—
A060J	10J	2	1	7.2/9.6	24.57/32.76	34.7/40	53/60	60/60	60/60	44/50	45/50	—	—	—
	15J	3	2	10.8/14.4	36.85/49.13	52/60	75/85	80/80	90/90	65/75	70/80	—	—	—
	20J	4	2	14.4/19.2	49.12/65.52	69.33/80	97/110	100/100	110/110	87/100	90/100	—	—	—



208-240 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION														
Separate Power Supply For Both Unit and Heater Kit														
Unit Model No. RSPM-	Single Power Supply For Both Unit and Heater Kit										Heater Kit			
	RXQJ-C Heater Kit Nominal kW	No. of Elements	No. of Sequence Steps	Rated Heater kW @ 208-240 V	Heater KBTU/Hr @ 208-240 V	Heater Amp. @ 208-240 V	Unit Min. Ckt. Ampacity @ 208-240 V	Over Current Protective Device Size		Min. Ckt. Ampacity 208-240 V	Max. Fuse Size	Min. Circuit Ampacity 208-240 V	Over Current Protective Device Size	
								Min./Max. @ 208 V	Min./Max. @ 240 V				Min./Max. @ 208 V	Min./Max. @ 240 V
A036C	No Heat	—	—	—	—	—	22/22	25/30	25/30	—	22/22	—	25/30	25/30
	10C	2	1	7.2/9.6	24.57/32.76	20/23.1	31/34	35/35	35/35	25/29	25/30	—	—	—
	15C	3	2	10.8/14.4	36.85/49.13	30.1/34.7	43/49	45/45	50/50	38/44	40/45	—	—	—
A042C A043C	No Heat	—	—	—	—	—	25/25	30/35	30/35	—	25/25	—	30/35	30/35
	10C	2	1	7.2/9.6	24.57/32.76	20/23.1	33/37	35/35	40/40	25/29	25/30	—	—	—
	15C	3	2	10.8/14.4	36.85/49.13	30.1/34.7	46/51	50/50	60/60	38/44	40/45	—	—	—
	20C	4	2	14.4/19.2	49.12/65.52	40/46.3	58/66	60/60	70/70	50/58	50/60	—	—	—
A048C	No Heat	—	—	—	—	—	27/27	30/40	30/40	—	27/27	—	30/40	30/40
	10C	2	1	7.2/9.6	24.57/32.76	20/23.1	33/37	35/35	40/40	25/29	25/30	—	—	—
	15C	3	2	10.8/14.4	36.85/49.13	30.1/34.7	46/51	50/50	60/60	38/44	40/45	—	—	—
	20C	4	2	14.4/19.2	49.12/65.52	40/46.3	58/66	60/60	70/70	50/58	50/60	—	—	—
A060C	No Heat	—	—	—	—	—	30/30	35/45	35/45	—	30/30	—	35/45	35/45
	10C	2	1	7.2/9.6	24.57/32.76	20/23.1	35/39	35/35	40/40	25/29	25/30	—	—	—
	15C	3	2	10.8/14.4	36.85/49.13	30.1/34.7	48/53	50/50	60/60	38/44	40/45	—	—	—
	20C	4	2	14.4/19.2	49.12/65.52	40/46.3	60/68	60/60	70/70	50/58	50/60	—	—	—




UNIT DIMENSIONS—RSNM/RSPM- SERIES


DIMENSIONS

Model	Height "A"
024, 030, 036, 042, 043	29 1/8"
048, 060	37 1/8"

FRONT VIEW

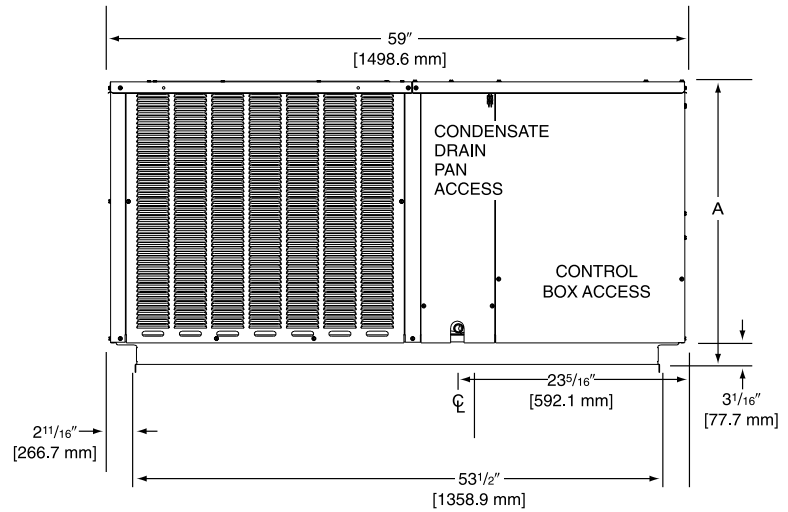


REAR VIEW


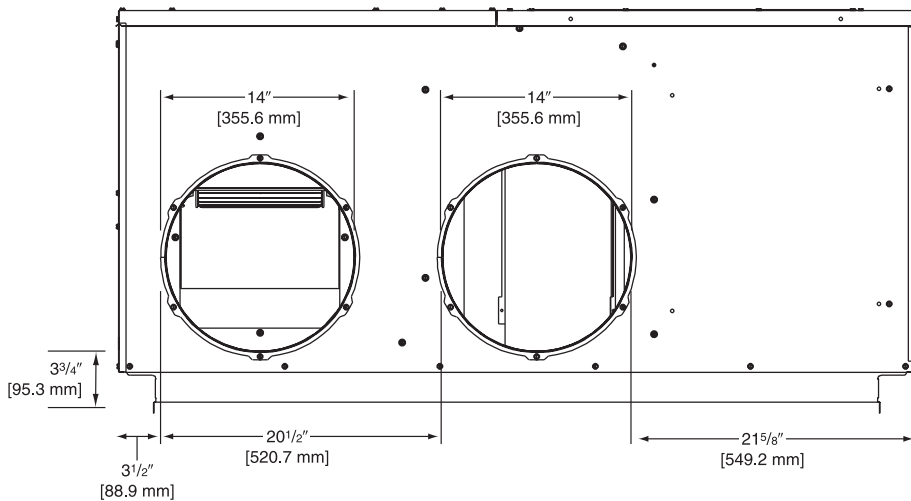


BOTTOM VIEW

ELECTRICAL CONNECTIONS

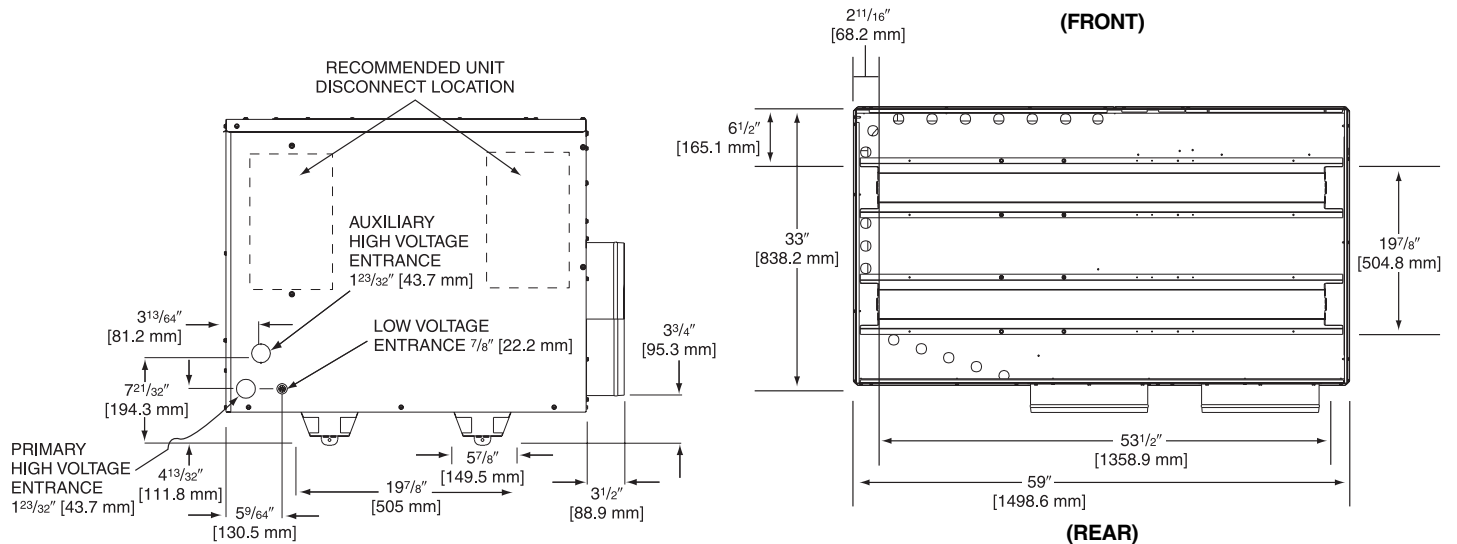

[] Designates Metric Conversions

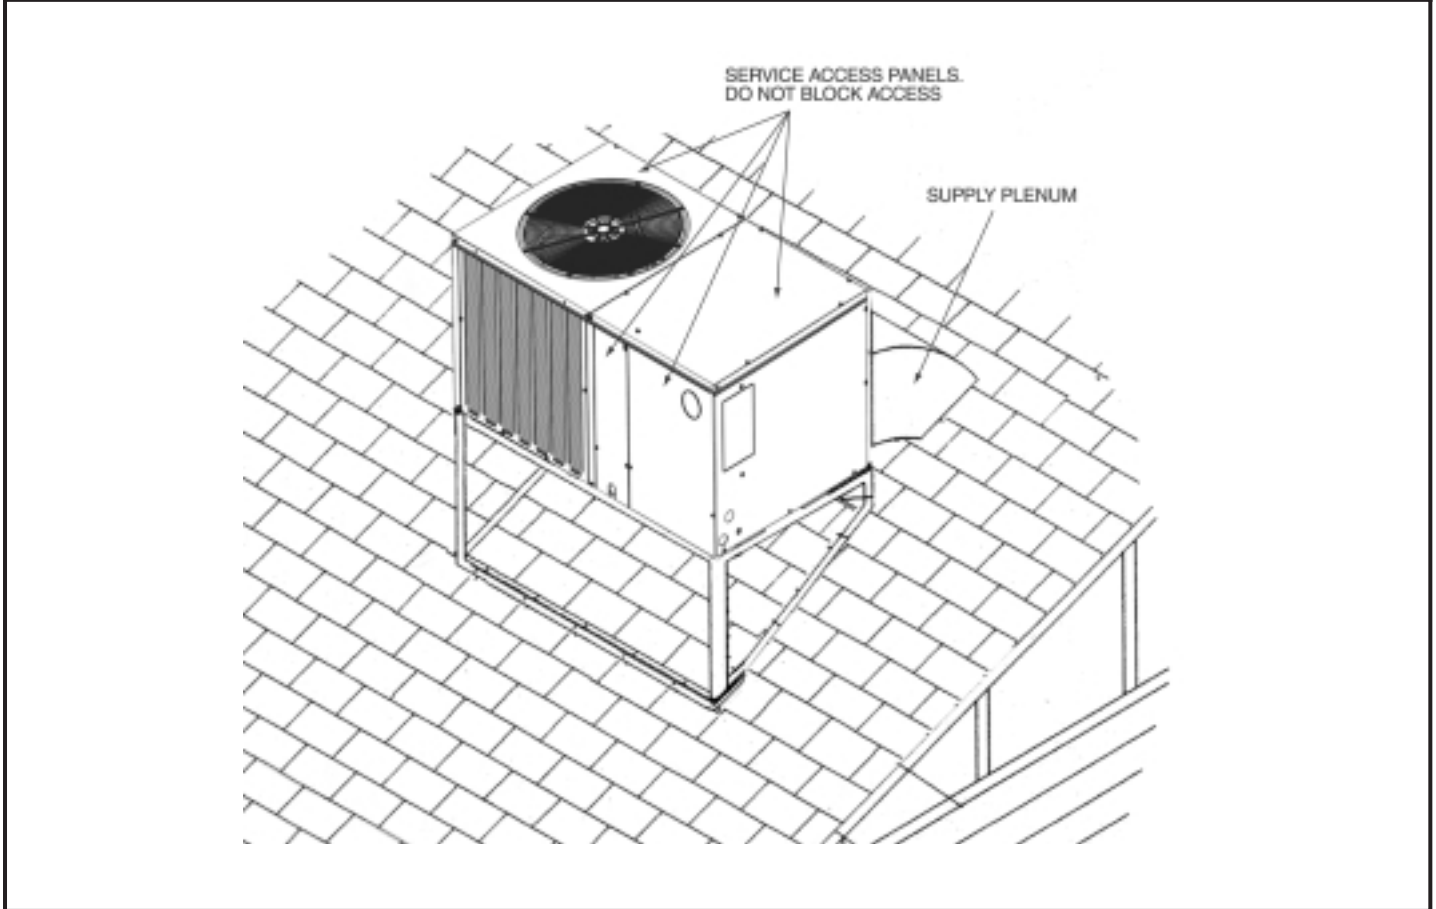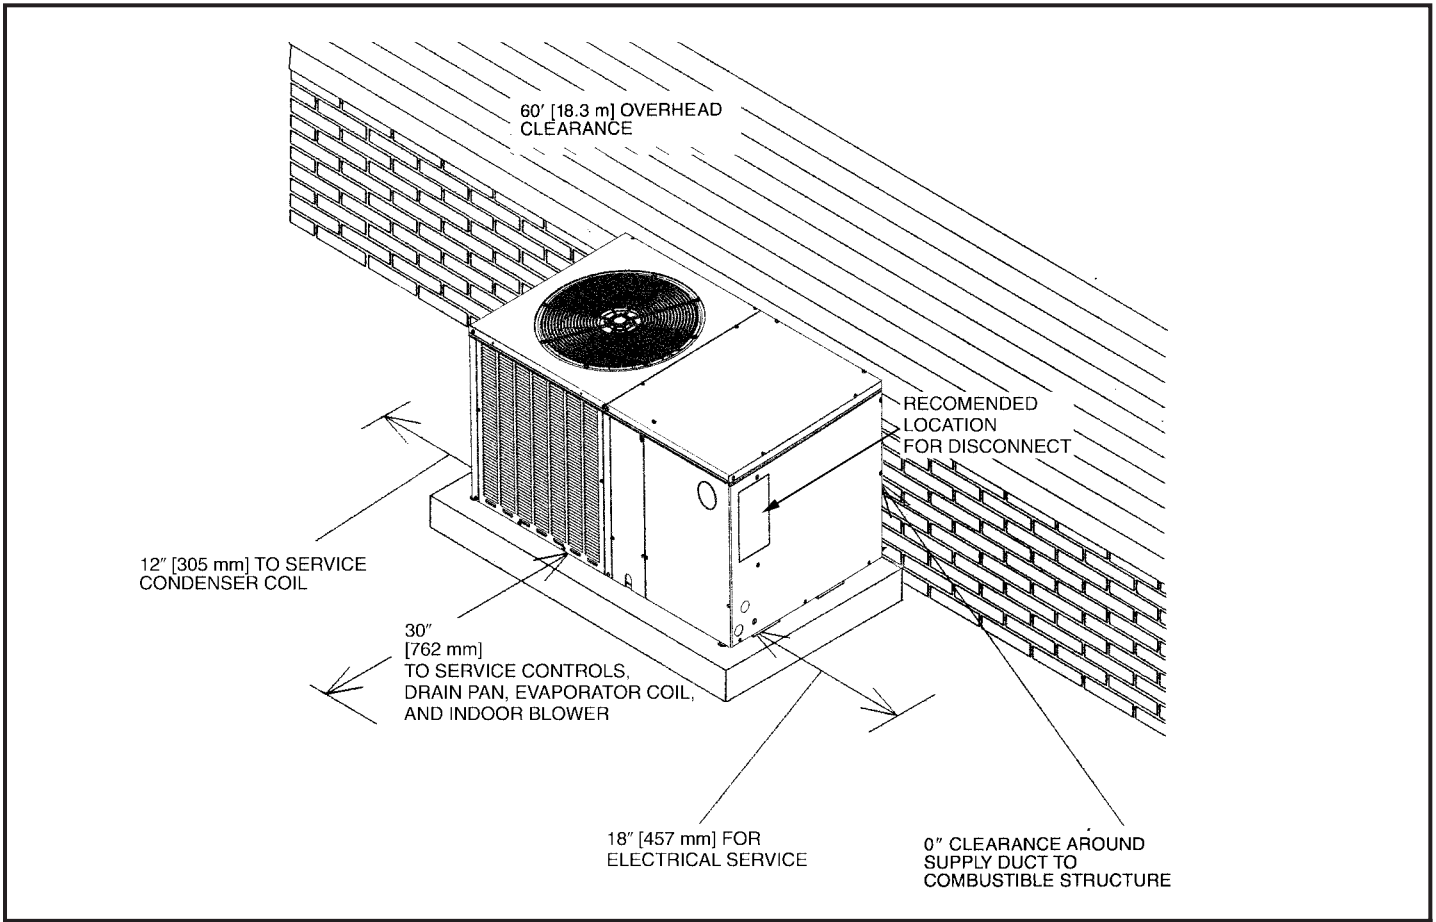

ACCESSORY EQUIPMENT

Accessory Description	Model Application	Accessory Model No.
Outdoor Thermostat	RSNM/RSPM	RXPT-A01
Thermostat	RSNM/RSPM	See Thermostat Specification Sheet (T11-001)

THERMOSTATS



100-Series *
Non-Programmable



200-Series *
Programmable



300-Series *
Deluxe
Programmable




400-Series *
Special Applications/
Programmable

500-Series *
Communicating/
Programmable

Brand	Unique Model Number Prefix	Descriptor (3 Characters)	Series (3 Characters)	System (2 Characters)	Type (2 Characters)
RHC	-	TST	101	GE	MS
RHC=Rheem		TST=Thermostat	100=Non-Programmable 200=Programmable 300=Deluxe Programmable 400=Special Applications/ Programmable 500=Communicating/ Programmable	GE=Gas/Oil/Electric HP=Heat Pump MD=Modulating Furnace DF=Dual Fuel UN=Universal AC/HP/GE CM=Communicating	SS=Single-Stage MS=Multi-Stage

* Photos are representative. Actual models may vary.

For detailed thermostat match-up information, see specification sheet form number T11-001.


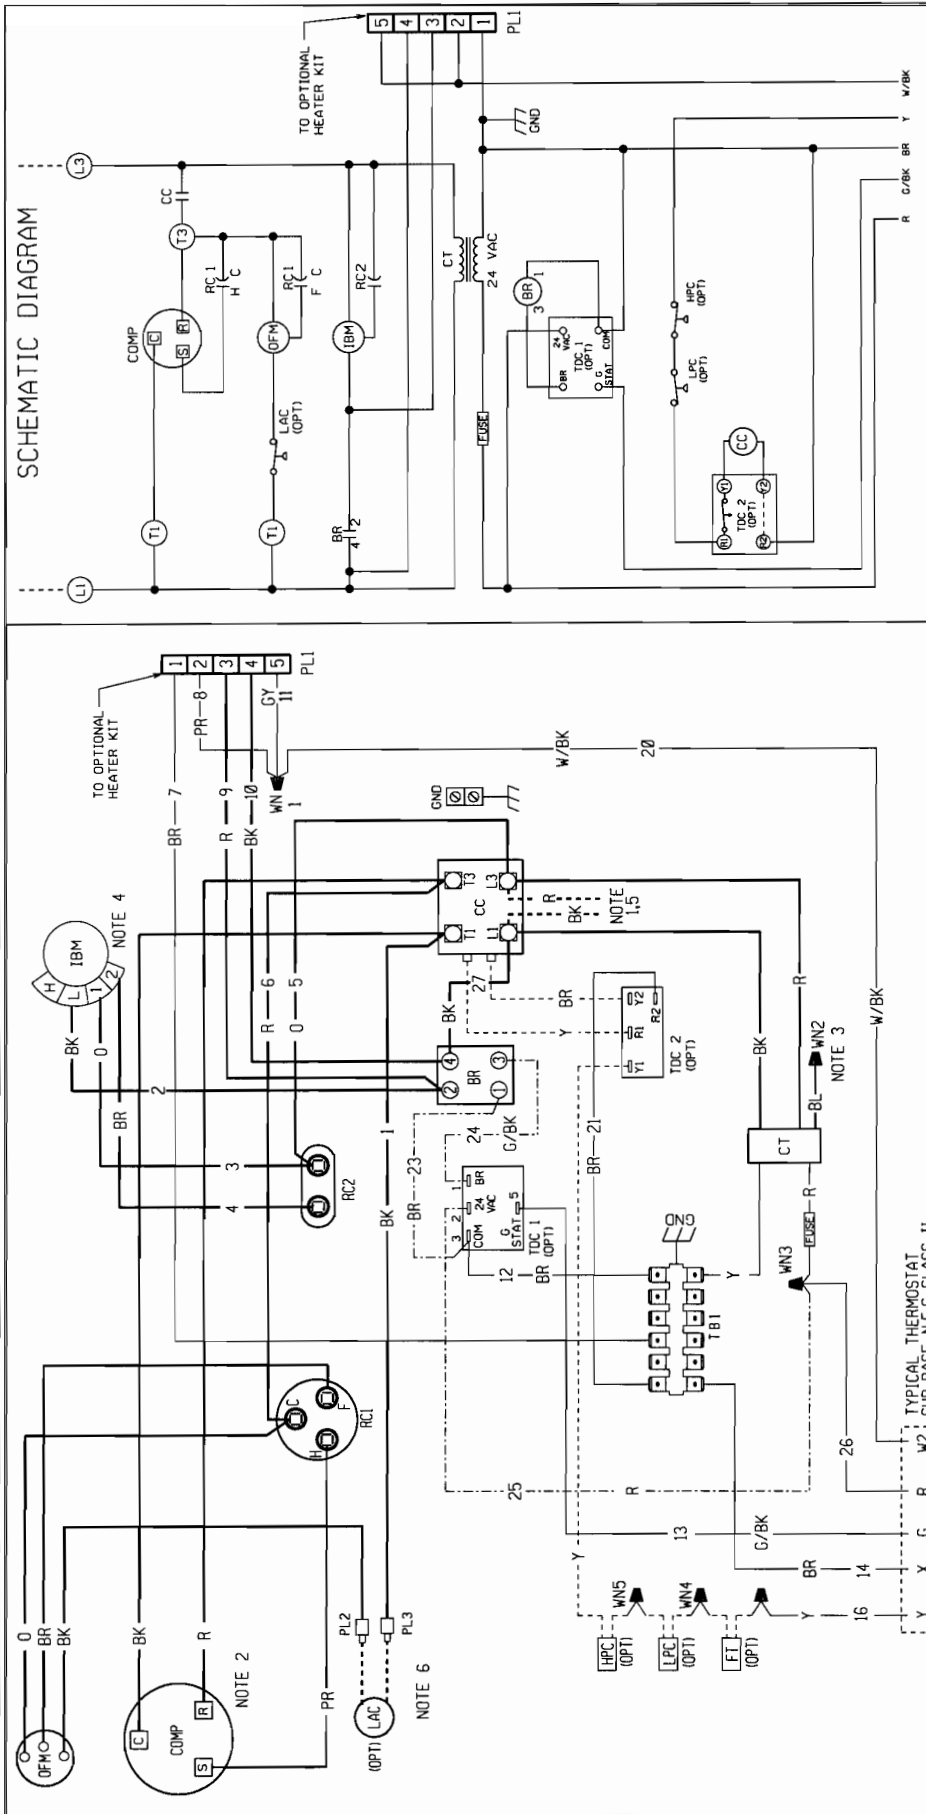


SCHEMATIC DIAGRAM

<p>WIRING INFORMATION</p> <ul style="list-style-type: none"> LINE VOLTAGE -FACTORY STANDARD -FACTORY OPTION -FIELD INSTALLED LOW VOLTAGE -FACTORY STANDARD -FACTORY OPTION -FIELD INSTALLED REPLACEMENT WIRE -MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C.MIN.) WARNING -CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C. NATIONAL WIRING REGULATIONS, AND LOCAL CODES AS APPLICABLE. 	<p>WIRE COLOR CODE</p> <p>BK...BLACK BR...BROWN BL...BLUE G...GREEN W...WHITE Y...YELLOW</p>
<p>NOTES:</p> <ol style="list-style-type: none"> CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY. COMPRESSOR MOTOR THERMALLY PROTECTED. TRANSFORMER FACTORY WIRED FOR 230 VOLTS. USE RED AND BLUE LEADS FOR 208 VOLTS. MOTOR FACTORY WIRED FOR LOW SPEED. SEE AIRFLOW TABLES IN INSTALLATION INSTRUCTIONS TO DETERMINE CORRECT SPEED FOR UNIT APPLICATION. FUSE BLOCK. PL2 & PL3 ARE CONNECTED WHEN LAC IS NOT PRESENT. 	<p>ELECTRICAL WIRING DIAGRAM</p> <p>PACKAGE AIR CONDITIONER</p> <p>1 PH, 208-230 VOLT - 60 HZ 1 PH, 220-240 VOLT - 50 HZ</p> <p>DR. BY: [Signature] DATE: 03-05-04 DWG. NO. 90-23637-05 REV. 04</p>

COMPONENT CODE

- BLOWER RELAY
- COMPRESSOR CONTACTOR
- COMPRESSOR
- CONTROL TRANSFORMER
- FREZE STAT
- GROUND
- HIGH PRESSURE CONTROL
- INDOOR BLOWER MOTOR
- LOW AMBIENT COOLING CONTROL
- LPC
- LOW PRESSURE CONTROL
- OUTDOOR FAN MOTOR
- OPTIONAL
- PL PLUG
- RUN CAPACITOR
- TERMINAL BLOCK
- TIME DELAY CONTROL
- WIRE NUT

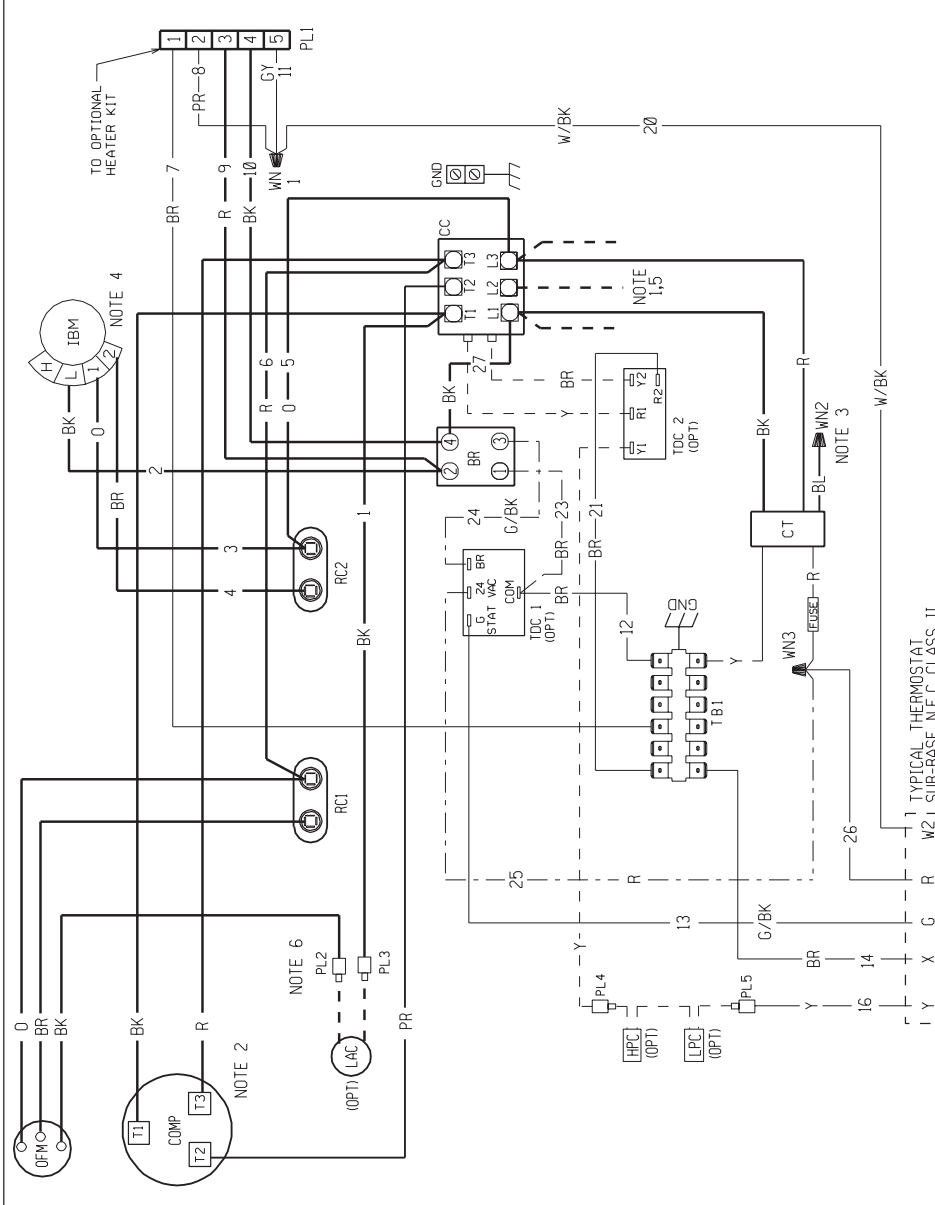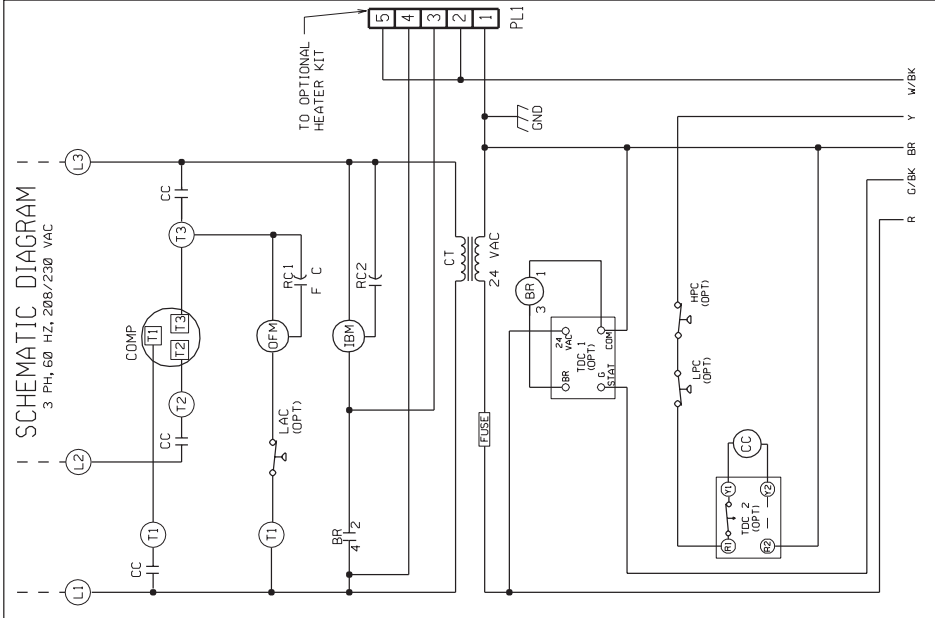


WIRE COLOR CODE	
BK	BLACK
BR	BROWN
BL	BLUE
G	GREEN
GY	GRAY
Y	YELLOW
O	ORANGE
PR	PURPLE
R	RED
W	WHITE
Y	YELLOW

WIRING INFORMATION	
---	LINE VOLTAGE
---	FACTORY STANDARD
---	FACTORY OPTION
---	FIELD INSTALLED
---	LOW VOLTAGE
---	FACTORY STANDARD
---	FACTORY OPTION
---	FIELD INSTALLED
REPLACEMENT WIRE	
-MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C° MIN.)	
WARNING	
-CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C. AND LOCAL CODES AS APPLICABLE.	

NOTES:	
1.	CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
2.	COMPRESSOR MOTOR THERMALLY PROTECTED.
3.	TRANSFORMER FACTORY WIRED FOR 230 VOLTS. USE RED AND BLUE LEADS FOR 208 VOLTS.
4.	MOTOR FACTORY WIRED FOR LOW SPEED. SEE AIRFLOW TABLES IN INSTALLATION INSTRUCTIONS TO DETERMINE CORRECT SPEED FOR UNIT APPLICATION.
5.	FIELD WIRING OR CONNECTION FROM HEATER KIT FUSE BLOCK.
6.	PL2 & PL3 ARE CONNECTED WHEN LAC IS NOT PRESENT.

COMPONENT CODE	
AUX LIMIT CONTROL	LAC
BLOWER RELAY	RC1
COMPRESSOR CONTACTOR	OFM
CRANKCASE HEATER	PL
COMPRESSOR	COMP
CONTROL TRANSFORMER	CT
GROUND	GND
HIGH PRESSURE CONTROL	HPC (OPT)
INDOOR BLOWER MOTOR	IBM
LOW AMBIENT COOLING CONTROL	LAC
OUTDOOR FAN MOTOR	OFM
OPTIONAL	OPT
PLUG	PL
RUN CAPACITOR	RC
TERMINAL BLOCK	TB
TIME DELAY CONTROL	TDC
WIRE NUT	WN

DWG. NO. **90-23637-06** REV **01**

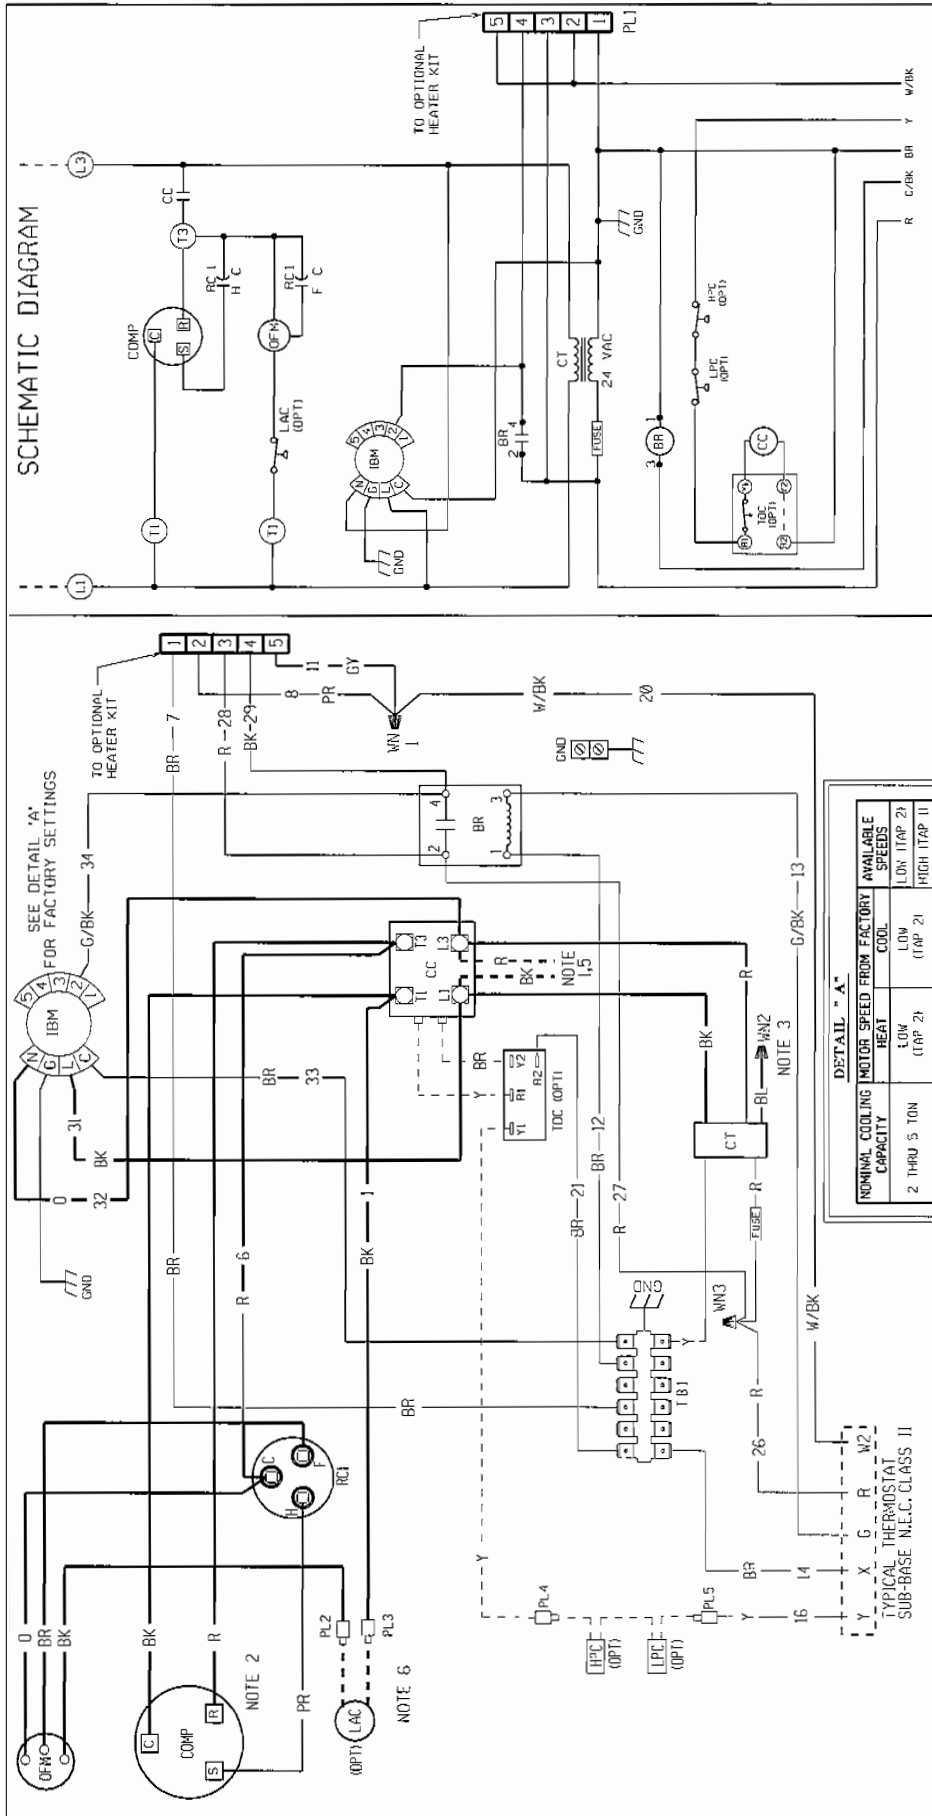

COMPONENT CODE

AUX. LIMIT CONTROL LAC
 BLOWER RELAY LFC
 COMPRESSOR CONTACTOR OFM
 CRANKCASE HEATER OPT
 COMPRESSOR PL
 CONTROL TRANSFORMER RC
 GROUND TB
 HIGH PRESSURE CONTROL TPC
 INDOOR BLOWER MOTOR IBM

WIRING INFORMATION

LINE VOLTAGE
 -FACTORY STANDARD
 -FIELD INSTALLED
 LOW VOLTAGE
 -FACTORY STANDARD
 -FIELD INSTALLED
 REPLACEMENT WIRE
 -MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (005 C. MIN.)
 WARNING
 -CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C. AND LOCAL CODES AS APPLICABLE.

WIRE COLOR CODE

BK BLACK
 BR BROWN
 BL BLUE
 G GREEN
 GR GRAY
 O ORANGE
 PK PINK
 PR PURPLE
 R RED
 W WHITE
 Y YELLOW

ELECTRICAL WIRING DIAGRAM

PACKAGE AIR CONDITIONER


1 PH, 208-230 VOLT - 60 HZ

NOTES:

- CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
- COMPRESSOR MOTOR THERMALLY PROTECTED.
- TRANSFORMER FACTORY WIRE FOR 230 V.C.T.S. USE RED AND BLUE LEADS FOR 208 VOLTS.
- MOTOR FACTORY WIRE FOR LOW SPEED. SEE AIR-FOK TABLES IN INSTALLATION INSTRUCTIONS TO DETERMINE CORRECT SPEED FOR UNIT APPLICATION.
- FUSE BLOCK.
- PL2 & PL3 ARE CONNECTED WHEN LAC IS NOT PRESENT.

DETAIL "A"

NOMINAL COOLING CAPACITY	MOTOR SPEED FROM FACTORY	AVAILABLE SPEEDS
2 THRU 5 TON	HEAT	COOL
	LOW (TAP 2)	LOW (TAP 2)
	HIGH (TAP 1)	HIGH (TAP 1)

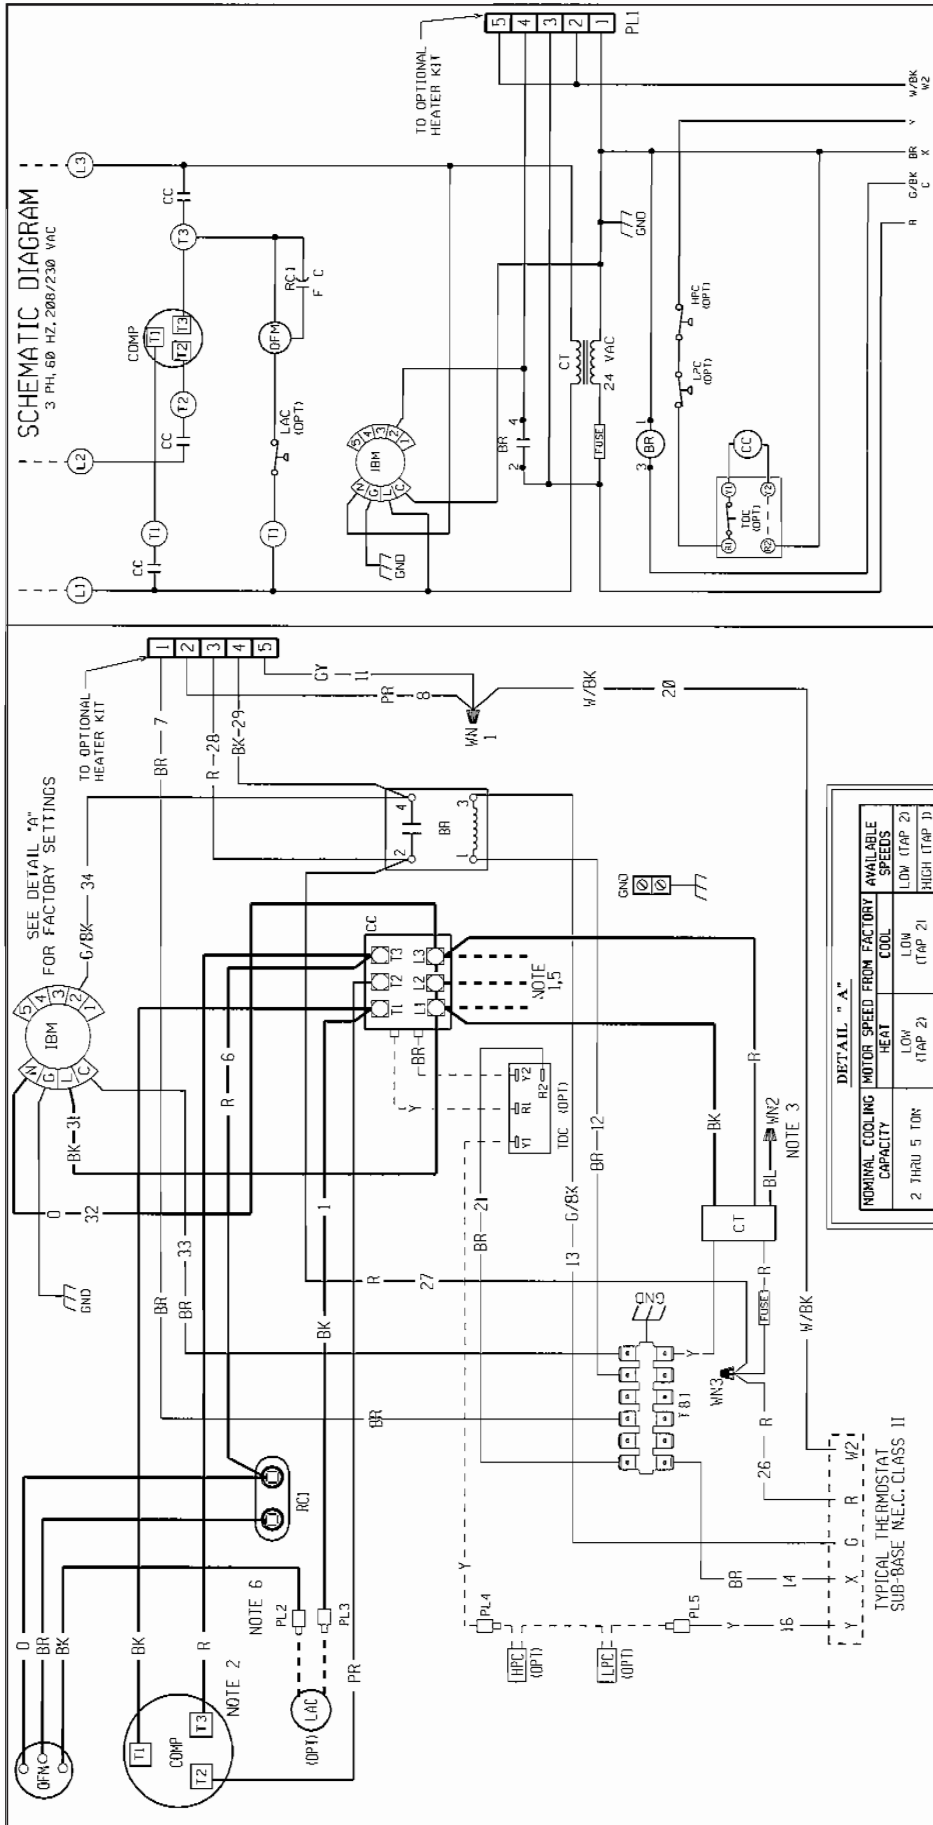

SCHEMATIC DIAGRAM
3 PH, 60 HZ, 208/230 VAC

<p>COMPONENT CODE</p> <p>AUX. LIMIT CONTROL BLOWER DELAY COMPRESSOR CONTACTOR CRANKCASE HEATER COMPRESSOR CONTROL TRANSFORMER GROUND HIGH PRESSURE CONTROL INDOOR BLOWER MOTOR</p> <p>LAC OFM OPT PL RC T8 TDC</p> <p>LOW AMBIENT COOLING CONTROL OUTDOOR FAN MOTOR OPTIONAL PLUG RUN CAPACITOR TERMINAL BLOCK TIME DELAY CONTROL WIRE NUT</p>	<p>WIRING INFORMATION</p> <p>LINE VOLTAGE -FACTORY STANDARD -FACTORY OPTION -FIELD INSTALLED</p> <p>LOW VOLTAGE -FACTORY STANDARD -FACTORY OPTION -FIELD INSTALLED</p> <p>REPLACEMENT WIRE -MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C. MIN.) WARNING -CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C. AND LOCAL CODES AS APPLICABLE.</p>	<p>WIRE COLOR CODE</p> <table style="width: 100%; border: none;"> <tr><td>BK</td><td>BLACK</td><td>GY</td><td>GRAY</td><td>R</td><td>RED</td></tr> <tr><td>BR</td><td>BROWN</td><td>O</td><td>ORANGE</td><td>W</td><td>WHITE</td></tr> <tr><td>BL</td><td>BLUE</td><td>PK</td><td>PINK</td><td>Y</td><td>YELLOW</td></tr> <tr><td>G</td><td>GREEN</td><td>PR</td><td>PURPLE</td><td></td><td></td></tr> </table> <p>ELECTRICAL WIRING DIAGRAM</p> <p>PACKAGE AIR CONDITIONER</p> <p>3 PH, 208-230 VOL.T - 60 HZ</p> <p>DR. BY J.R.J. DATE 8-18-65 DWG. NO. 90-23637-10 REV 01</p>	BK	BLACK	GY	GRAY	R	RED	BR	BROWN	O	ORANGE	W	WHITE	BL	BLUE	PK	PINK	Y	YELLOW	G	GREEN	PR	PURPLE		
BK	BLACK	GY	GRAY	R	RED																					
BR	BROWN	O	ORANGE	W	WHITE																					
BL	BLUE	PK	PINK	Y	YELLOW																					
G	GREEN	PR	PURPLE																							

DETAIL "A"



NOMINAL COOLING CAPACITY	MOTOR SPEED FROM FACTORY		AVAILABLE SPEEDS	
	HEAT	COOL	LOW (TAP 2)	HIGH (TAP 1)
2 THRU 5 TOR	LOW (TAP 2)	LOW (TAP 2)	LOW (TAP 2)	HIGH (TAP 1)

NOTES:

- CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
- COMPRESSOR MOTOR THERMALLY PROTECTED.
- TRANSFORMER FACTORY WIRING FOR 230 VOLTS, USE RED AND BLUE LEADS FOR 208 VOLTS.
- MOTOR FACTORY WIRING FOR LOW SPEED, SEE AIRFLOW TABLES IN INSTALLATION INSTRUCTIONS TO DETERMINE CORRECT SPEED FOR UNIT APPLICATION.
- FIELD WIRING OR CONNECTION FROM HEATER KIT FUSE BLOCK.
- PL2 & PL3 ARE CONNECTED WHEN LAC IS NOT PRESENT.



SCHEMATIC DIAGRAM

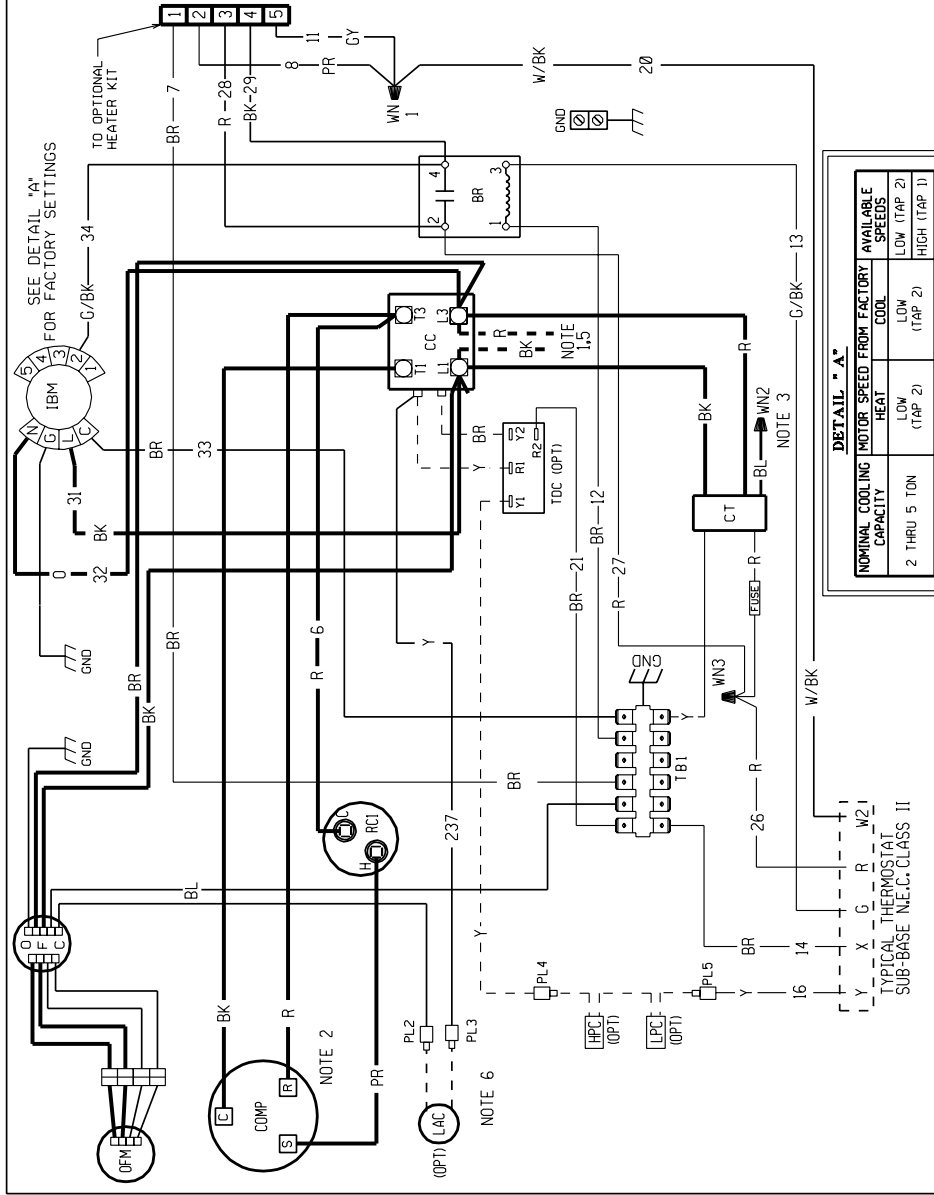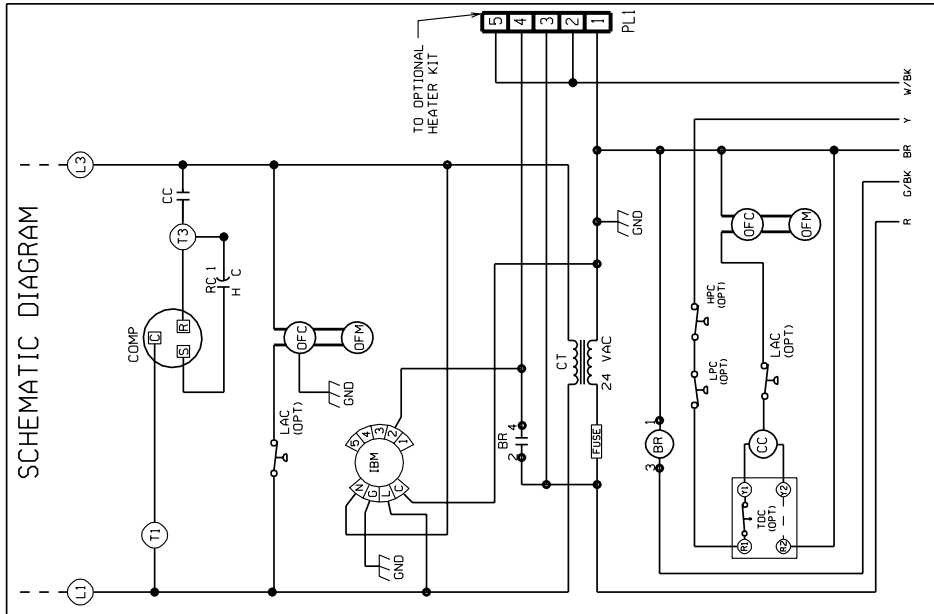

WIRE COLOR CODE

BK	BLACK	GY	GRAY	R	RED
BR	BROWN	O	ORANGE	W	WHITE
BL	BLUE	PK	PINK	Y	YELLOW
G	GREEN	PR	PURPLE	CL	CLEAR

ELECTRICAL WIRING DIAGRAM

PACKAGE AIR CONDITIONER

WITH INDOOR X-MOTOR AND OUTDOOR REMOTE CONTROL ECM

1 PH, 208-230 VOLT - 60 HZ

WIRING INFORMATION

--- LINE VOLTAGE
 - - - - - FACTORY STANDARD
 - - - - - FACTORY OPTION
 - - - - - FIELD INSTALLED

--- LOW VOLTAGE
 - - - - - FACTORY STANDARD
 - - - - - FACTORY OPTION
 - - - - - FIELD INSTALLED

REPLACEMENT WIRE
 - MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C° MIN.)

WARNING
 - CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C. AND LOCAL CODES AS APPLICABLE.


NOTES:

- CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
- COMPRESSOR MOTOR THERMALLY PROTECTED.
- TRANSFORMER FACTORY WIRED FOR 230 VOLTS. USE RED AND BLUE LEADS FOR 208 VOLTS.
- MOTOR FACTORY WIRED FOR LOW SPEED. SEE AIRFLOW TABLES IN INSTALLATION INSTRUCTIONS TO DETERMINE CORRECT SPEED FOR UNIT APPLICATION.
- FIELD WIRING OR CONNECTION FROM HEATER KIT FUSE BLOCK.
- PL2 & PL3 ARE CONNECTED WHEN LAC IS NOT PRESENT.

COMPONENT CODE

ALC	AUX. LIMIT CONTROL
BR	BLOWER RELAY CONTACTOR
CC	CRANKCASE HEATER
CH	COMPRESSOR HEATER
COMP	COMPRESSOR
CT	CONTROL TRANSFORMER
GND	GROUND
HPC	HIGH PRESSURE CONTROL
IBM	INDOOR BLOWER MOTOR
LAC	LOW AMBIENT COOLING CONTROL
PLC	PLUG
PL1	OUTDOOR FAN MOTOR
PL2	OPTIONAL
PL3	OPTIONAL
PL4	OPTIONAL
PL5	OPTIONAL
PL6	OPTIONAL
PL7	OPTIONAL
PL8	OPTIONAL
PL9	OPTIONAL
PL10	OPTIONAL
PL11	OPTIONAL
PL12	OPTIONAL
PL13	OPTIONAL
PL14	OPTIONAL
PL15	OPTIONAL
PL16	OPTIONAL
PL17	OPTIONAL
PL18	OPTIONAL
PL19	OPTIONAL
PL20	OPTIONAL
PL21	OPTIONAL
PL22	OPTIONAL
PL23	OPTIONAL
PL24	OPTIONAL
PL25	OPTIONAL
PL26	OPTIONAL
PL27	OPTIONAL
PL28	OPTIONAL
PL29	OPTIONAL
PL30	OPTIONAL
PL31	OPTIONAL
PL32	OPTIONAL
PL33	OPTIONAL
PL34	OPTIONAL
PL35	OPTIONAL
PL36	OPTIONAL
PL37	OPTIONAL
PL38	OPTIONAL
PL39	OPTIONAL
PL40	OPTIONAL
PL41	OPTIONAL
PL42	OPTIONAL
PL43	OPTIONAL
PL44	OPTIONAL
PL45	OPTIONAL
PL46	OPTIONAL
PL47	OPTIONAL
PL48	OPTIONAL
PL49	OPTIONAL
PL50	OPTIONAL
PL51	OPTIONAL
PL52	OPTIONAL
PL53	OPTIONAL
PL54	OPTIONAL
PL55	OPTIONAL
PL56	OPTIONAL
PL57	OPTIONAL
PL58	OPTIONAL
PL59	OPTIONAL
PL60	OPTIONAL
PL61	OPTIONAL
PL62	OPTIONAL
PL63	OPTIONAL
PL64	OPTIONAL
PL65	OPTIONAL
PL66	OPTIONAL
PL67	OPTIONAL
PL68	OPTIONAL
PL69	OPTIONAL
PL70	OPTIONAL
PL71	OPTIONAL
PL72	OPTIONAL
PL73	OPTIONAL
PL74	OPTIONAL
PL75	OPTIONAL
PL76	OPTIONAL
PL77	OPTIONAL
PL78	OPTIONAL
PL79	OPTIONAL
PL80	OPTIONAL
PL81	OPTIONAL
PL82	OPTIONAL
PL83	OPTIONAL
PL84	OPTIONAL
PL85	OPTIONAL
PL86	OPTIONAL
PL87	OPTIONAL
PL88	OPTIONAL
PL89	OPTIONAL
PL90	OPTIONAL
PL91	OPTIONAL
PL92	OPTIONAL
PL93	OPTIONAL
PL94	OPTIONAL
PL95	OPTIONAL
PL96	OPTIONAL
PL97	OPTIONAL
PL98	OPTIONAL
PL99	OPTIONAL
PL100	OPTIONAL

DR. BY JHB DATE 9-03-09 DWG. NO. 90-23637-17 REV 01

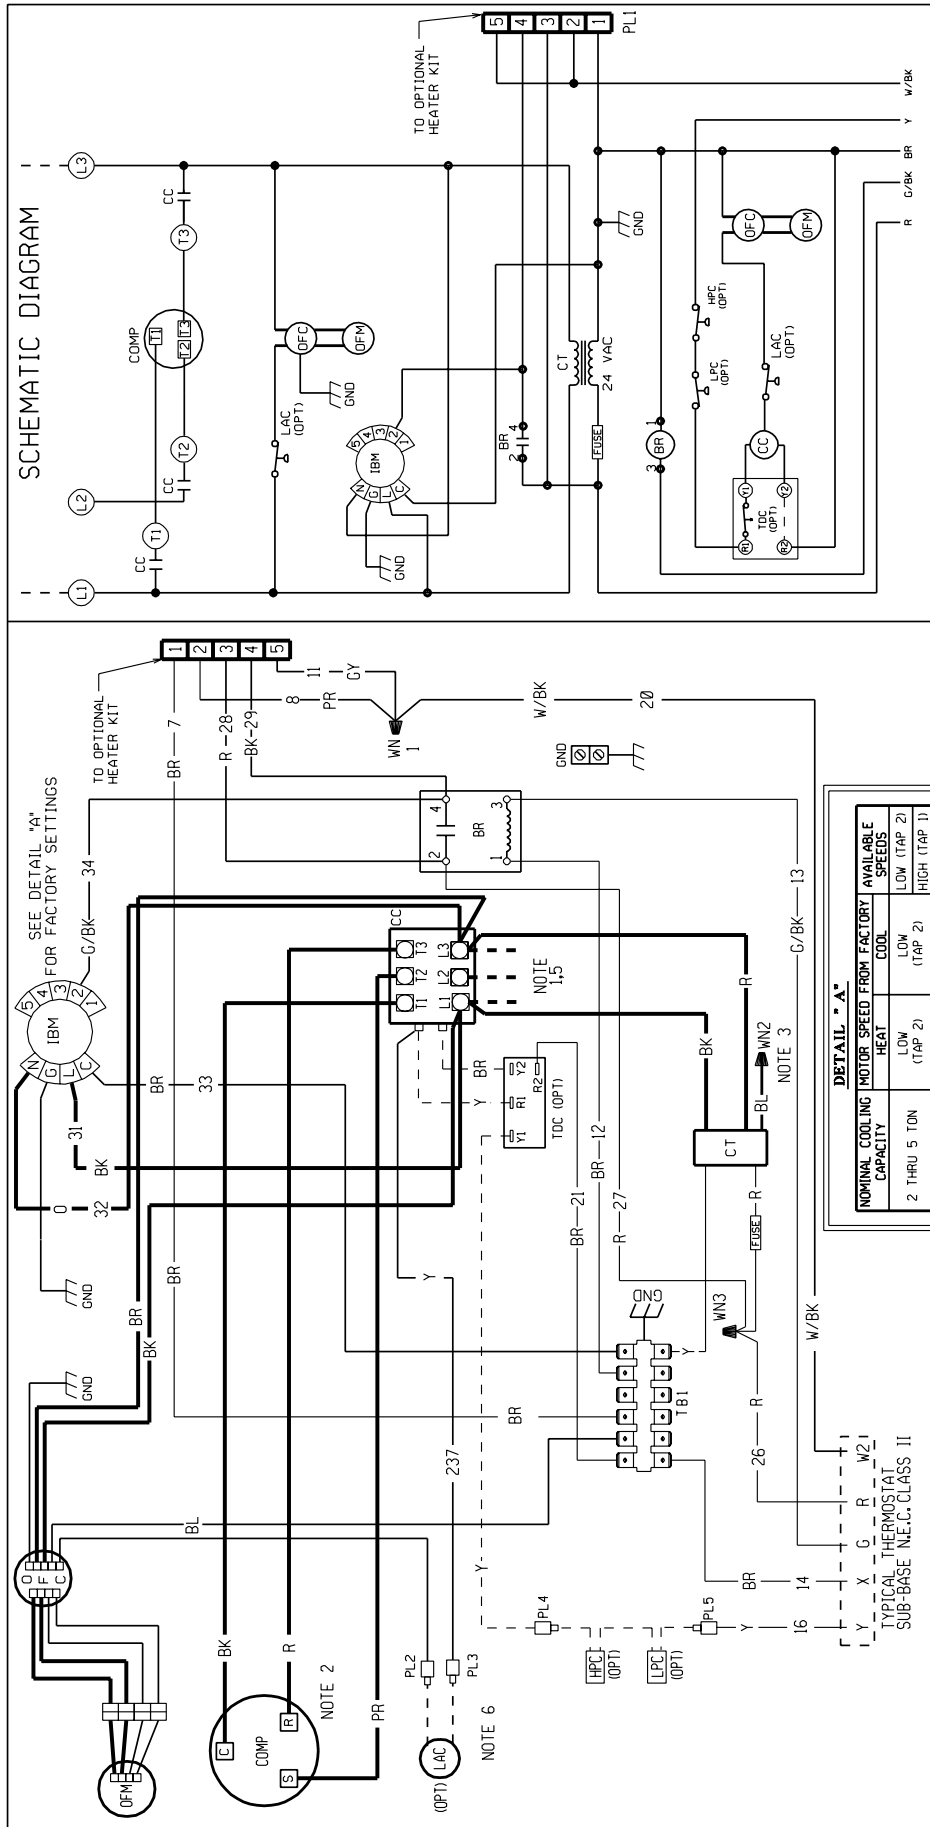

WIRE COLOR CODE

BK	BLACK	GY	GRAY	R	RED
BR	BROWN	O	ORANGE	W	WHITE
BL	BLUE	PK	PINK	Y	YELLOW
G	GREEN	PR	PURPLE	CL	CLEAR

ELECTRICAL WIRING DIAGRAM

PACKAGE AIR CONDITIONER
WITH INDOOR X-MOTOR AND OUTDOOR REMOTE CONTROL ECM

DR. BY JHB APP. BY JHB DATE 9-03-09 DWG. NO. 90-23637-18 REV 01

WIRING INFORMATION

—	LINE VOLTAGE
—	-FACTORY STANDARD
—	-FACTORY OPTION
—	-FIELD INSTALLED
—	LOW VOLTAGE
—	-FACTORY STANDARD
—	-FACTORY OPTION
—	-FIELD INSTALLED
—	REPLACEMENT WIRE
—	-MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C MIN.)
—	WARNING
—	-CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C. AND LOCAL CODES AS APPLICABLE.

NOTES:

- CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
- COMPRESSOR MOTOR THERMALLY PROTECTED.
- TRANSFORMER FACTORY WIRED FOR 230 VOLTS. USE RED AND BLUE LEADS FOR 208 VOLTS.
- MOTOR FACTORY WIRED FOR LOW SPEED. SEE AIRFLOW TABLES IN INSTALLATION INSTRUCTIONS TO DETERMINE CORRECT SPEED FOR UNIT APPLICATION.
- FIELD WIRING OR CONNECTION FROM HEATER KIT FUSE BLOCK.
- PL2 & PL3 ARE CONNECTED WHEN LAC IS NOT PRESENT.

COMPONENT CODE

ALC	AUX. LIMIT CONTROL
BR	BLOWER RELAY
CC	COMPRESSOR CONTACTOR
CH	CRANKCASE HEATER
CC	COMPRESSOR HEATER
CT	CONTROL TRANSFORMER
GND	GROUND
HPC	HIGH PRESSURE CONTROL
IBM	INDOOR BLOWER MOTOR
LAC	LOW AMBIENT COOLING CONTROL
DFC	OUTDOOR FAN CONTROL
DFM	OUTDOOR FAN MOTOR
OPT	OPTIONAL
PL	PLUS
PLC	PLUG CAPACITOR
PLB	TERMINAL BLOCK
TDC	TIME DELAY CONTROL
WIRE NUT	WIRE NUT

DETAIL "A"

NOMINAL COOLING CAPACITY	MOTOR SPEED FROM FACTORY	AVAILABLE SPEEDS
2 THRU 5 TON	HEAT	LOW (TAP 2)
	COOL	LOW (TAP 2)
		HIGH (TAP 1)

BEFORE PURCHASING THIS APPLIANCE, READ IMPORTANT ENERGY COST AND EFFICIENCY INFORMATION AVAILABLE FROM YOUR RETAILER.

GENERAL TERMS OF LIMITED WARRANTY

Rheem will furnish a replacement for any part of this product which fails in normal use and service within the applicable periods stated, in accordance with the terms of the limited warranty.

***For Complete Details of the Limited Warranty, Including Applicable Terms and Conditions, See Your Local Installer or Contact the Manufacturer for a Copy.**

***Conditional Parts (Registration Required)**
(Residential Applications)Ten (10) Years
Compressor
(1 Phase Residential Applications).....Ten (10) Years
(13 & 14 SEER, Commercial Applications).....Five (5) Years
Any Other PartFive (5) Years

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

**Rheem Heating,
Cooling and
Water Heating**

P.O. Box 17010, Fort Smith, AR 72917



"In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice."