

RoughinBox™

- The only way to rough in a wall mounted minisplit in new construction or to the studs rehab.
- Protects the lineset & cable from damage and shields the drain outlet from dirt & debris.
- Easy to install, easy to access, easy to hook up.
- Saves time, saves money, saves hassle.
- For wood or metal studs at 16" centers.




Improved MODEL RBX3-MD-NC now includes an Extra Lineset Port on bottom and accommodates vertical or horizontal condensate discharge to suit highwall or height restricted applications.



Vertical drain for most highwall applications, showing bottom access for lineset.

DIMENSIONS: 14" W x 8" H x 3.5" D

Evaporator drain hose connects directly into drain outlet in box using adaptor supplied.



Horizontal drain for restricted height applications over doors and windows, showing top access for lineset.

Accommodates a concealed reservoir and/or condensate pump. The Versatile Model RBX3-MD-NC replaces Model RBX1 and RBX2 and makes it easy to install a Wallmount Minisplit in any application!

RoughinBox™

Patented

Multiple features make Minisplit installation in new construction or rehab simple, quick and easy. Protects lineset & cable and keeps drain outlet clean.

Fits perfectly between standard wood or metal studs at 16" centers, while 3 1/2" depth fits inside any standard wall cavity.

2 Faceplate retainer clamps as well as an extra evaporator bracket support are included

Generous lineset ports include cover markings to facilitate cutting and reduce sealant required while accommodating larger linesets and thicker insulation

Rounded edges on lineset ports facilitate insertion of linesets and prevent insulation tearing

Optional wiring ports accommodate 1/2" and 3/4" cable and include cable grip feature

One piece molded construction is completely waterproof

Adaptors supplied work perfectly with wood studs and are easily adjustable and pre-notched to facilitate installation into metal studs as well

Hinged faceplate with retainer clamps provides easy access when roughing in linesets and wiring, and protects them during sheetrocking process

Fully reversible for LH or RH installations

Includes 2 integral side ports for optional side entry of lineset

Backplate can easily be removed to provide rear access from another room for maintenance, then closed off with an optional white plastic cover plate

Provides closed off frame 1/2" proud of stud surface to facilitate sheetrocking

Extra lineset port provides easy access for bottom entry linesets

Linear drain pan slope guarantees complete drainage


Integral stress absorber reduces cracking due to overtorque and provides flexibility for small adjustments

Universal drain outlet accommodates downward discharge for highwall applications or can easily & quickly be modified for horizontal discharge in space restricted areas over doors & windows. Both configurations end with 3/4" MPT for easy connection to rigid PVC or copper pipe.

Faceplate is removed when evaporator is installed, and can be used as a mounting bracket for condensate pump & reservoir (if required)

Multiple fixing holes for secure fastening

Evaporator drain hose connects directly into drain outlet in box using rubber drain adaptor supplied.

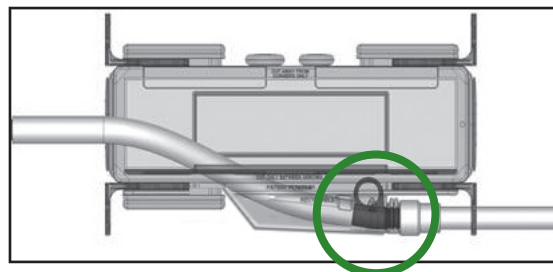

PRECISION FABRICATION RESULTS IN PRECISION INSTALLATIONS, EVERY TIME!

Manufactured in an ISO 9001 certified facility under one or more of the following US patents:
9,841,209 B2, D 786,416 S, D 789,503 S, D 813,365 S.

Exclusive Master Distributor for the USA:



MARKETAIR Inc.

P.O. Box 10330, New Brunswick, NJ 08906 USA
ph: 732-985-8226 • fax: 732-985-2134 • info@marketair.com
www.marketair.com