
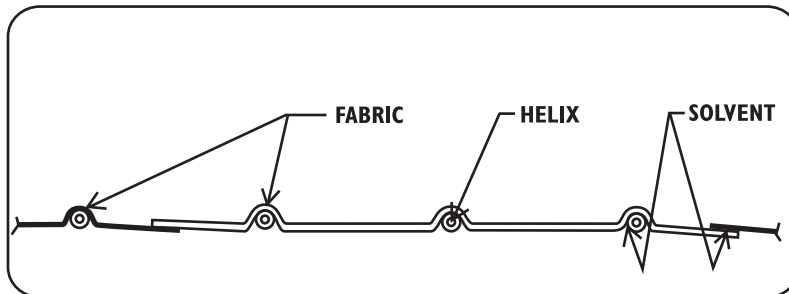




SUBMITTAL SHEET for Flexible Duct

S-TL Non-Insulated Flexible Air Duct for All Pressure Systems

CODES/STANDARDS	GreenGuard Certified for Superior Indoor Air Quality		Listed and labeled by Underwriters' Laboratories, Inc., as a Class I Air Duct , Standard 181. It complies with the latest NFPA Bulletins 90A and 90B. Flame spread: not over 25. Smoke developed: not over 50.																								
FABRIC TYPE	Coated fiberglass woven fabric.																										
STEEL WIRE	Coated spring steel wire helix.																										
SIZES, ID	2	3	4	5	6	7	8	9	10	12	14	16	18	20													
LENGTH (feet)	25 ft.										15 ft.																
INSIDE BEND RADIUS (inches)	2	3	4	5	6	7	8	9	10	12	14	16	18	20													
OPERATING TEMPERATURE RANGE	0° F to 250° F.																										
RATED VELOCITY	6000 fpm.																										
MAX RATED PRESSURE (inches water column)	POSITIVE							16 inches (2-10 in. dia.)							10 inches (12-20 in. dia.)												
	NEGATIVE														1 inch												



JOB _____	P.O. NO. _____
LOCATION _____	JOB NO. _____
ENGINEER _____	REPRESENTATIVE _____
CONTRACTOR _____	_____
Certified Correct	Approved for Construction
BY _____	BY _____
TITLE _____	TITLE _____
DATE _____	DATE _____

THERMAFLEX® – A Division of Flex-Tek Group, a subsidiary of Smiths Group plc.
 National Sales Headquarters
 • 528 Carwellyn Rd. • Abbeville, SC 29620 • 800-459-4822
 Canada
 • 5230 Orbitor Dr. • Mississauga, Ontario L4W 5G7 • 905-602-9660
 www.thermaflex.net

