




Builder's Best, Inc.
 201 Broiles Drive
 Jacksonville, TX 75766
 888-368-7233
 fax: 800-259-8368
 www.BuilderBest.com

THERMOFIN MODEL A 100 STRETCH FIT™ AIR DUCT



DESCRIPTION

- Thermofin® Original product is produced using the same process, machinery, and materials that has made it so successful for the past 35 years.
- Semi-rigid corrugated easily bent metal duct that can be formed by hand into curves and small radius elbows.
- Spiral formed out of aluminum alloy with 30° strength angles between ribs, mechanically locked together with continuous knurled leak proof "Acme" lock
- Crimped ends slides easily into plain end, ensuring smooth connections.
- Our design allows for better stretching and bending characteristics. This helps eliminate flattening on the outside radius of a bend thus preventing restricted airflow.

PART NUMBERS

Diameter	T-Fin Part #	BB part #	Qty
3"	UL SSF03	111356	42
4"	UL SSF04	111357	25
5"	UL SSF05	111358	16
6"	UL SSF06	111270	12
7"	UL SSF07	111271	9
8"	UL SSF08	111272	6
9"	UL SSF09	111273	5
10"	UL SSF10	111274	4

PRODUCT SPECIFICATIONS


- Compressed 8" length
- Uninsulated
- Factory crimp on one side
- UL® 181 label Class 0 Air Duct in accordance with NFPA 90a and 90b

PERFORMANCE DATA

- Recommended Operating Pressure:
 Maximum positive and negative:
 12" w.g. - 3" thru 10" diameters
- Maximum velocity: 5,000 FPM
- Operating Temp. Range: -100°F to +430°F
- Flame Speed 0
- Smoke Developed 0

Duct Diameter (in.)	Approx. Bend Radius (in.)
3	1.5
4	2
5	2.5
6	3
7	3.5
8	4
9	4.5
10	5

AIRFLOW

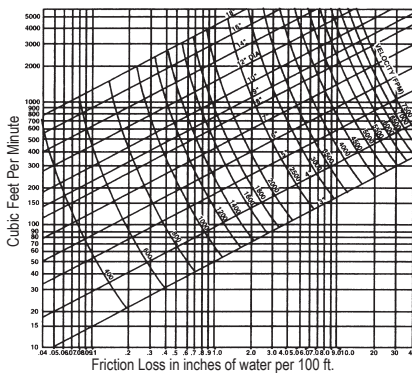

INSTALLATION: Air duct connections and joints shall be made per installation instructions outlined by Builder's Best and as required by the UL 181 listing procedure. (Installation instructions are included inside each carton.)

LABELS



WARRANTY

Manufacturer assumes no responsibility for failure due to improper installation. All specifications and designs are subject to change without notice and without incurring liability.

WARRANTY EXCLUSION AND DISCLAIMER Seller specifically excludes, and hereby disclaims any express representation or express warranty of any kind with respect to the goods ordered hereunder. All implied warranties, including without limitation merchantability or fitness for a particular purpose or arising from a course of dealing or usage or trade shall expire and cease 45 days after date of delivery. Seller shall not be liable to buyer or any third party for any special, secondary, incidental, or consequential damages however arising. Nothing in this provision shall invalidate or restrict any right or remedy otherwise available under state or federal law. Materials and specifications subject to change without notice.