


SAFE-T-SWITCH® MODEL SS3



File #: E209344

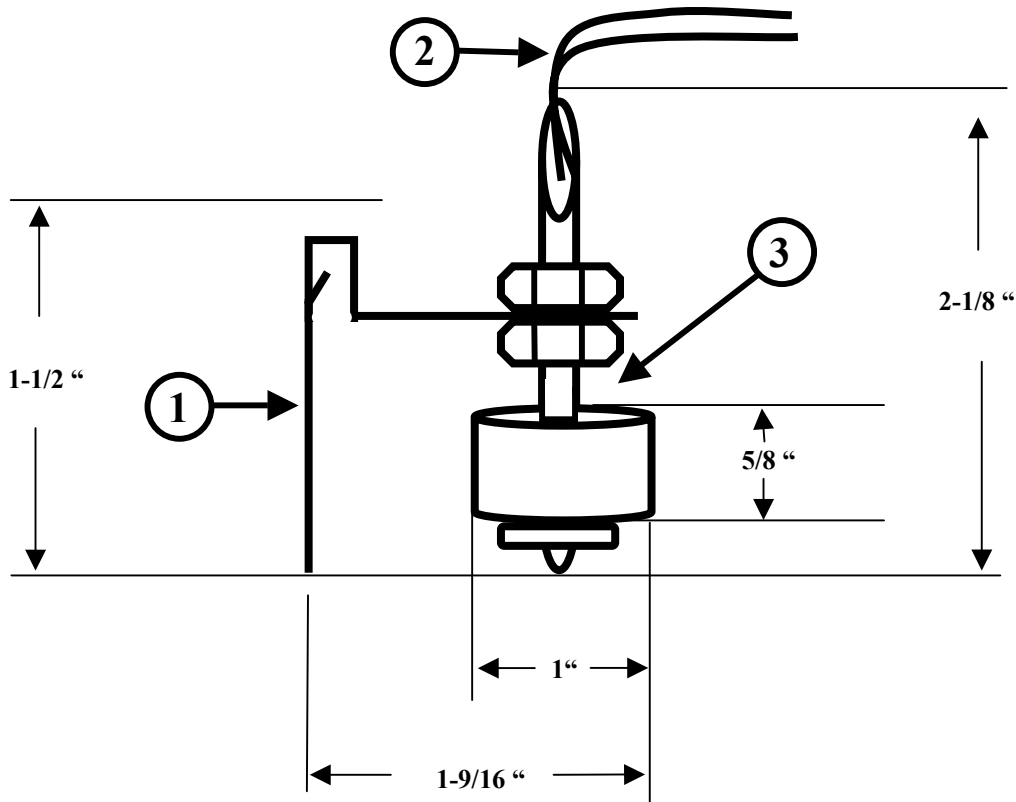

RECTORSEAL

2601 Spenwick Dr.
Houston, TX 77055
TEL #: 713-263-8001 or 800-231-3345
FAX: 713-263-7577 or 800-441-0051
www.rectorseal.com

PART NAME:

**MODEL SS3 A/C CONDENSATE
PAN OVERFLOW SWITCH**

TOLERANCES: (EXCEPT WHERE NOTED)

.XX ± .020
.XXX ± .005
.XXXX ± .0005
ANG. ± ½ °

SCALE:

NONE

DRAWN BY:

MTB

DATE:

12/4/06

DRAWING #:

SS1

APPROVED BY:

SPO

REVISION:

B

①

Stainless Steel Clip/Bracket

②

**72"-Inch, 18AWG Cables
(Pre-wired/ Potted)**

③

**Electrically Potted Reed/Magnet
Switch Assembly**

COMMENTS / REQUIREMENTS:

- ◆ Minimum Pan Depth: 1-1/2 Inch. Adjusts for deeper pans
- ◆ Sensitivity: ¼-inch rise in float opens switch
- ◆ Potted, water sealed reed/magnet switch design
- ◆ Conforms to UL 508
- ◆ 1.25 Amp switching capacity
- ◆ 24 Volts A/C Class 2