

QUALITY TOOLS THAT WORK FOR YOU®



# 5.5CFM

## 2 STAGE - FOR DEEP VACUUM

# VACUUM PUMP

  
**TAKES OUT  
MOISTURE**

**1/4" AND 3/8" MALE  
FLARE INTAKE  
FITTINGS WITH  
TETHERED CAPS**

**CENTER BALANCED  
HANDLE WITH  
NON-SLIP GRIP**

**LOW  
PROFILE  
ON/OFF  
ROCKER  
SWITCH**

**OIL FILL PORT  
AND EXHAUST  
DOME**




**110V/220V  
POWER  
SELECTOR  
SWITCH**


**LARGE  
SIGHT GLASS  
FOR EASY OIL  
MONITORING**



**6 FT. REMOVABLE  
POWER CORD**

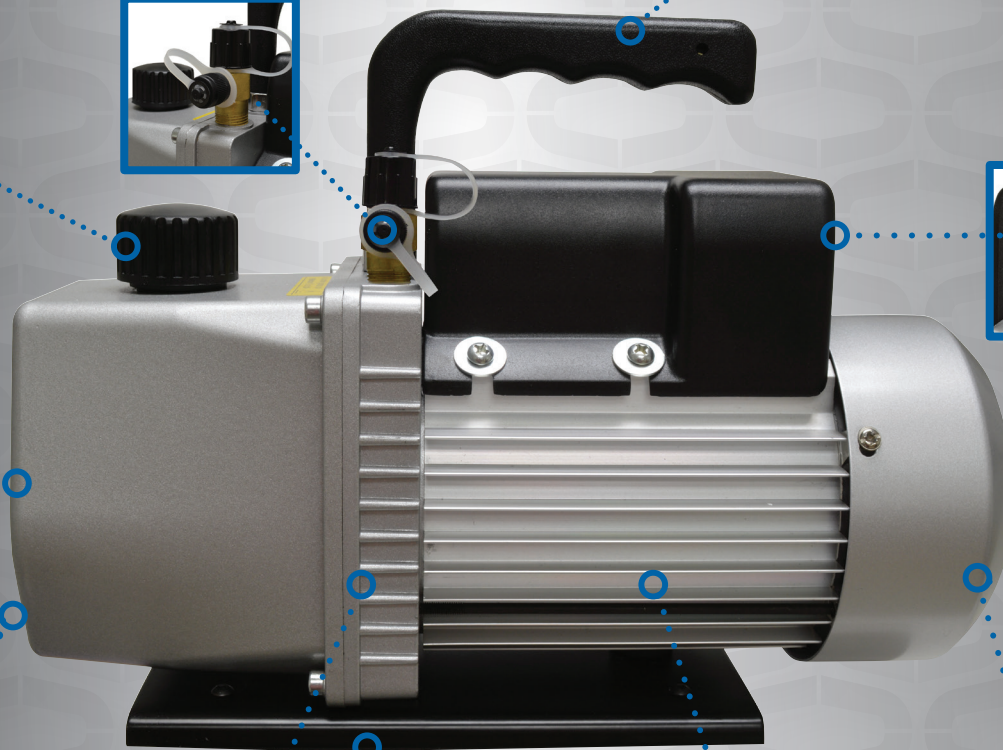

**EASY ACCESS  
OIL DRAIN**



**HEAT  
DISPERSING FINS**



**WIDE, STABLE  
BASE**



**HEAT DISPERSING  
MOTOR FINS**



**FAN COOLED  
MOTOR**



2850 Ravenswood Road, Fort Lauderdale, FL 33312 U.S.A.  
Customer Service: 800.323.2111 • 954.584.2000 • Fax: 954.587.0109  
info@uniweld.com • www.uniweld.com



# 5.5 CFM 2 STAGE - FOR DEEP VACUUM VACUUM PUMP

Uniweld's high performance U5VP2 Vacuum Pump brings the latest in vacuum pump technology and has been designed to provide long term reliable service. The 5.5 CFM two stage vacuum pump is built for deep vacuum service on Appliances, Residential A/C and Commercial Refrigeration Systems.



**TAKES OUT  
MOISTURE**



- 2-STAGE
- LIGHTWEIGHT
- POWERFUL
- COOLER RUNNING
- DEEP VACUUM



**UNIWELD  
VACUUM PUMP OIL**

**Part# 42005**  
(1) Quart (946 ml)  
12 per case

**Part# 42006**  
(1) Gallon (3.78 L)  
6 per case

## PART# U5VP2 Vacuum Pump Specifications

Free Air Displacement .....	5.5 cfm, 155 liter/min.
Number of Stages .....	2- Stage Rotary Vane
Factory Micron Rating .....	15 Microns
Intake Fittings (with check valve).....	1/4" and 3/8" M.F.
Thermal Overload Protection.....	1/2 H.P.
Voltage .....	110V/220V-50/60 Hz
Power Cord .....	72" (1.83 m)
Oil Capacity .....	11.1 oz. (350 ml)
Dimensions .....	12.5" x 4" x 9.5" 32.5 cm x 10 cm x 24 cm
Weight .....	20.0 lbs. (9.1 kg)
Shipping Weight .....	22.2 lbs. (10.8 kg)



2850 Ravenswood Road, Fort Lauderdale, FL 33312 U.S.A.  
Customer Service: 800.323.2111 • 954.584.2000 • Fax: 954.587.0109  
info@uniweld.com • www.uniweld.com



SCAN WITH  
SMARTPHONE

FY0059