
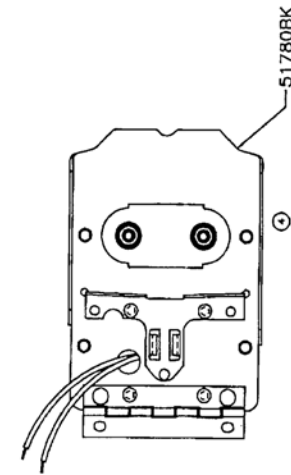





PROSTOCK / DIVISION OF RHEEM MFG.

REVISION

NOTES:
 ▲ (1) NO AIR LEAKAGE IN EXCESS OF 0.01" W.C. ALLOWED THROUGH SHADED AREA (FORWARD OF BARRIER) TO AREA BEHIND BARRIER WHEN COMPARED TO A BLANK BASEPLATE AT A PRESSURE OF 2.5" W.C. THIS INCLUDES LEAKAGE AROUND HIGH VOLTAGE INSULATORS, MOUNTING HOLES, ETC.
 (2) ▲ = KEY CHARACTERISTICS

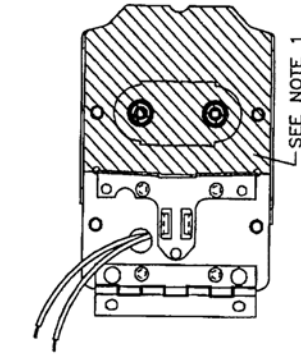

FORCE REQUIRED TO COMPRESS SPRINGS SIMULTANEOUSLY TO A HEIGHT OF ONE INCH SHALL EQUAL 3.5 POUNDS ±10%.

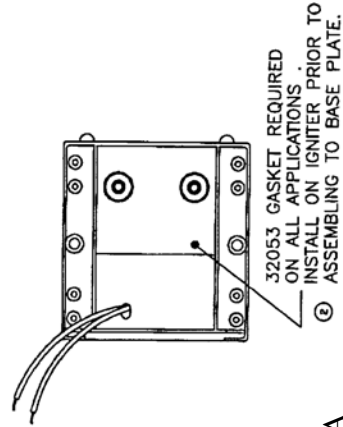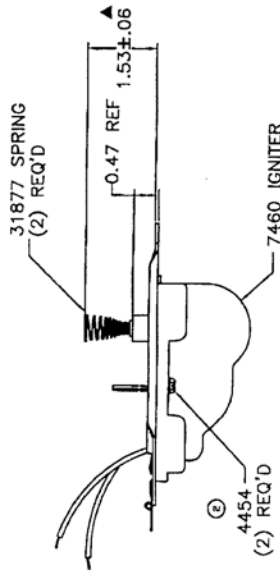

Primary : 120 V, 60Hz, 35VA
 Secondary : 6kVrms, 20kVpk
 35ma
 Secondary Mid-point Grounded

Vendor : Beckett
 Vendor No : 746001

Dr. By.	Date	Original Release No.	Pg.	Rev.
L. Stec	08/12/2002	N-00071	01	00

<p>Beckett Oil Burner Ignitor</p>	<p>PART NO</p>
	<p>62 - 25061 - 02</p>