

PRODUCT NUMBER:

DP

DESCRIPTION:

DRAIN PAN

PRODUCT DATA SHEET

UPDATED:

09/08/14


MODEL VARIATIONS

ALSO AVAILABLE WITHOUT HOLE.

HOLE CAN BE PLACED **ANYWHERE**.

AVAILABLE WITH 16 GAUGE SUPPORT RAILS + S-HOOKS FOR HANGING. (USE PART # DP-RAIL)

#DP (Nested Drain Pan)

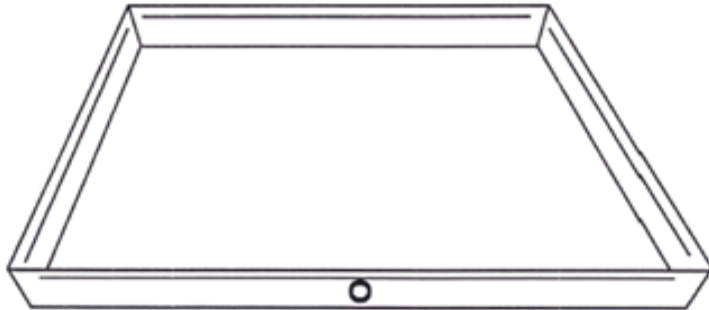


75% SPACE SAVINGS ON THE TRUCK & IN THE WAREHOUSE!



25 Drain Pans both straight and flaring, showing the remarkable savings in storage space made possible by nestable pans.



DP-RAIL (Drain Pan w/Support Rails)

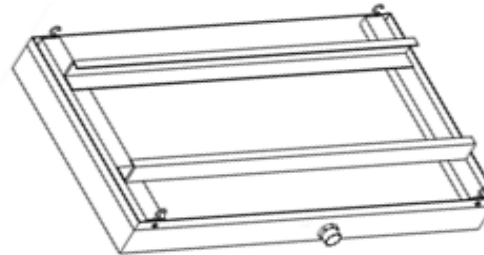

*Std Gauge of Pan = 24ga
Gauge of Support Rails = 16ga
Comes with S-Hooks for hanging.
Std hole location is centered on long side.
Pan has straight sides & cannot be nested.*

PRODUCTION DATA

MATERIAL: FABRICATED FROM HOT DIPPED GALVANIZED STEEL SHEETS OF LOCK FORMING QUALITY PER ASTM-A653 CS TYPE B.

5/16" HEM ON ALL EDGES.

GAUGES: 24GA, 26GA, 28GA

PRODUCT CHARACTERISTICS

3/4" DRAIN ATTACHED FOR FIELD INSTALLATION.

ONE PIECE SEAMLESS DESIGN.

REINFORCED BEAD FOR ADDED STRENGTH.

PRODUCT SIZE INFORMATION

CUSTOM BUILT TO MEET SPECIFIC UNIT DIMENSIONS.

STANDARD DEPTH: 2"
WIDTH: 26GA - UP TO 54"
WIDTH: 24GA - UP TO 43"
LENGTH: UP TO 96"

NOTES:

DUE TO FLARE OF NESTED PANS, THE TOP OUTSIDE DIMENSIONS ARE 1" LARGER THAN THE BASE OF THE PAN. THE TOP OF THE PAN FLARES OUT 1/2" ON EACH SIDE. (FOR EXAMPLE: IF THE DRAIN PAN DIMENSIONS ORDERED ARE 24X32, THE BASE OF THE PAN WILL BE 24X32 BUT THE OUTER TOP DIMENSIONS WILL BE 25X33).

SPECIFY LOCATION OF HOLE WHEN ORDERING. (STANDARD HOLE ON NESTED PANS IS OFFSET 5 1/2" ON RIGHT OF LONG SIDE)

*Snap-Rite
Manufacturing, Inc.*

232 N Ida St (PO Box 577)
Coats, NC 27521
PH: 910-897-4080
FX: 910-897-0355

6285 Peterson Road
Lake Park, GA 31636
PH: 229-559-3772
FX: 229-559-9965